


Schottky Barrier Rectifier

SS52F ~ SS520F

■ Features

- Metal silicon junction, majority carrier conduction
- For surface mounted applications
- Low power loss, high efficiency
- High forward surge current capability
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications

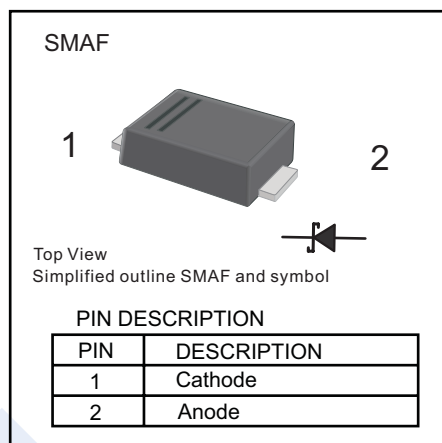

■ Absolute Maximum Ratings and Electrical characteristics

Ratings at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60Hz resistive or inductive load, for capacitive load, derate by 20 %

Parameter	Symbol	SS 52F	SS 54F	SS 56F	SS 58F	SS 510F	SS 512F	SS 515F	SS 520F	Unit
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	20	40	60	80	100	120	150	200	V
Maximum RMS voltage	V _{RMS}	14	28	42	56	70	84	105	140	
Maximum DC Blocking Voltage	V _{DC}	20	40	60	80	100	120	150	200	
Maximum Average Forward Rectified Current	I _{F(AV)}	5.0								A
Peak Forward Surge Current,8.3ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I _{FSM}	120				100				
Max Instantaneous Forward Voltage at 5 A	V _F	0.55		0.7		0.85				V
Maximum DC Reverse Current T _a = 25℃ at rated DC blocking voltage T _a = 100℃	I _R	1.0 50								mA
Typical Junction Capacitance *1	C _j	500		300						pF
Typical thermal resistance *2	R _{thJA}	60								℃/W
Junction Temperature	T _j	150								℃
Storage Temperature	T _{stg}	-55 to 150								

* 1 Measured at 1MHz and applied reverse voltage of 4 V D.C

* 2 P.C.B. mounted with 2" × 2" (5×5 cm) copper pad areas.

Schottky Barrier Rectifier

SS52F ~ SS520F

■ Typical Characteristics

Fig.1 Forward Current Derating Curve

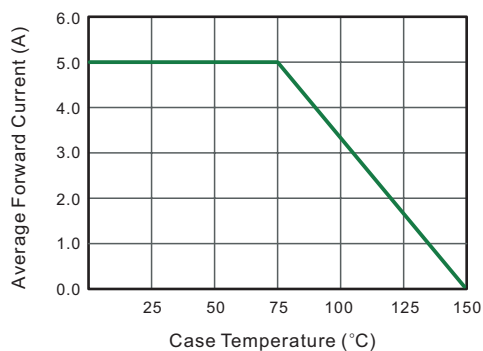


Fig.2 Typical Reverse Characteristics

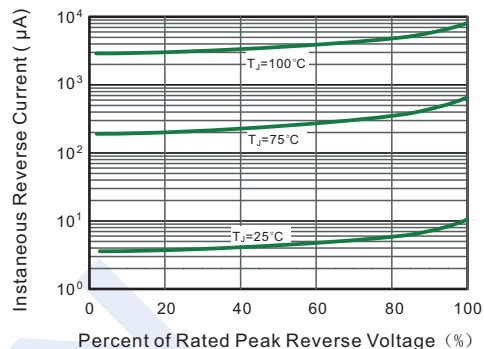


Fig.3 Typical Forward Characteristic

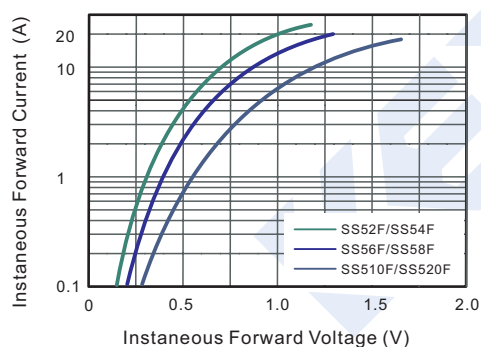


Fig.4 Typical Junction Capacitance

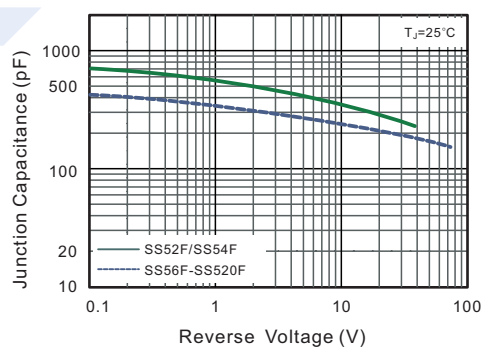


Fig.5 Maximum Non-Repetitive Peak Forward Surge Current


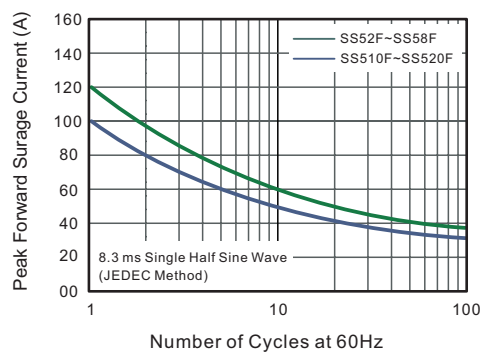


Fig.6 Typical Transient Thermal Impedance

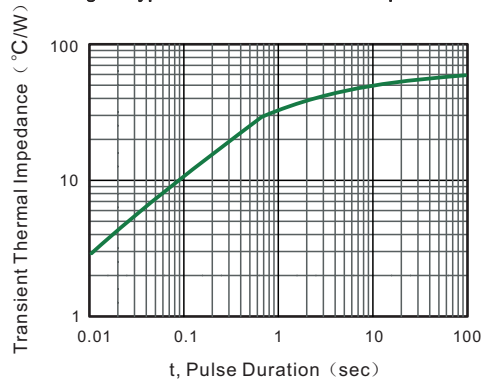


Schottky Diodes

SS52F ~ SS520F

■ Package Outline

Plastic surface mounted package; 2 leads

SMAF

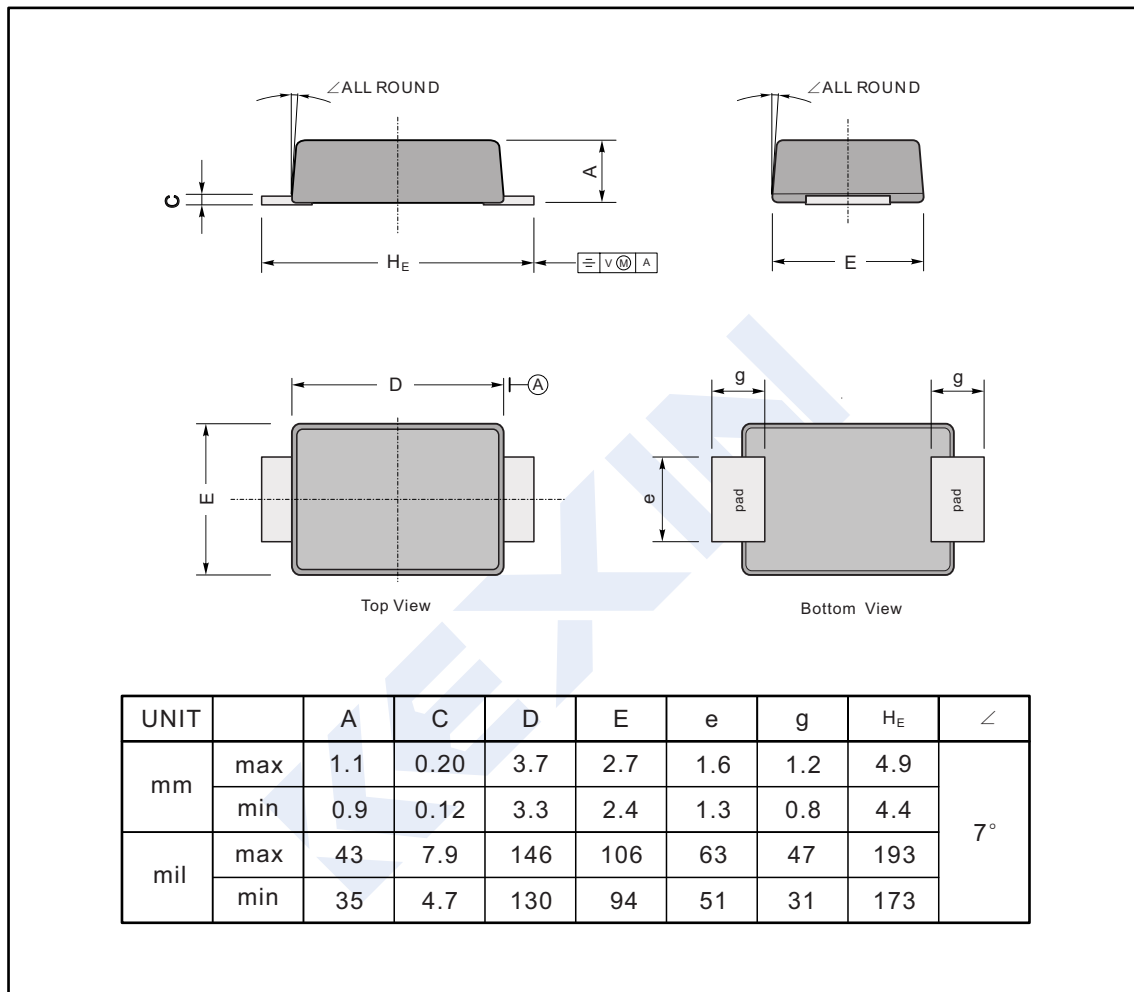

■ The recommended mounting pad size

