



SMT Planar Transformer – A0027-AL



Coilcraft's surface mount planar transformers are ideal for applications that require high efficiency in a low-profile package. Planar transformers offer high power densities along with great reliability and repeatability. The A0027-A is designed to perform in push-pull topologies operating at 200–300 kHz. The auxiliary winding can be used to control input current to PWMs.

To complete your design, Coilcraft offers a wide variety of power inductors for use as input and output chokes.

To request free evaluation samples, contact Coilcraft or visit www.coilcraft.com.

Part number	Output power (W)	Input voltage range (V)	Output voltage (V)	Output current (A rms)	Primary inductance ¹ min (mH)	Leakage inductance max (μH)	DCR max (Ohms)			Pri/sec isolation (Vrms)
							pri	sec	aux	
A0027-AL	10	36–75	3.3	2.0	1.30	3.5	1.13	0.042	0.331	1500

1. When ordering, please specify **packaging** code:

A0027-AL D



Packaging: D = 13" machine ready reel. EIA-481 embossed plastic tape (250 parts per full reel).

B = Less than full reel. In tape, but not machine ready. To have a leader and trailer added (\$25 charge), use code letter D instead.


1. Inductance measured between pins 1 and 3 at 250 kHz, 0.1 Vrms, 0 Adc.

2. Storage and ambient operating temperature range: –40°C to +85°C.

3. Electrical specifications at 25°C.

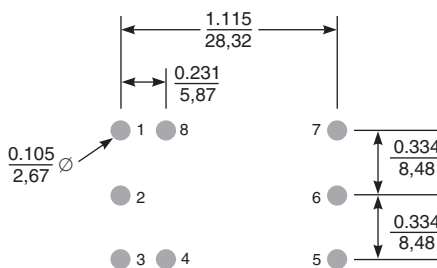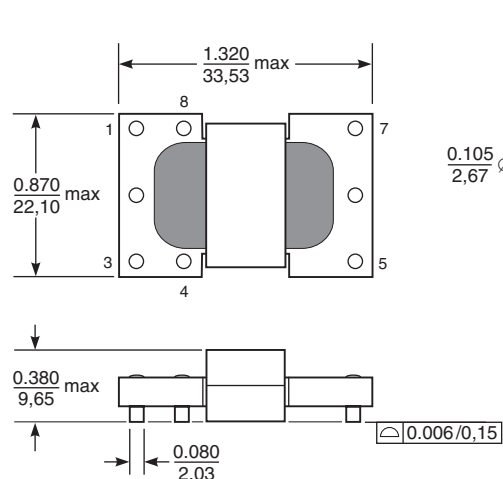

Recommended Land Pattern

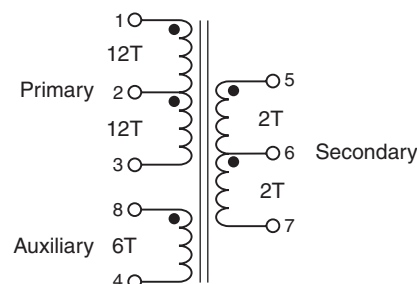

Weight: 10.0 g
Terminations: Matte tin over nickel over brass
Tape and reel: 250/13" reel 56 mm tape width
 For packaging data see Tape and Reel Specifications section.

Coilcraft®

Specifications subject to change without notice.
 Please check our website for latest information.

Document 299 Revised 06/19/07

1102 Silver Lake Road Cary, Illinois 60013 Phone 847/639-6400 Fax 847/639-1469

E-mail info@coilcraft.com Web <http://www.coilcraft.com>