


Features

- High switching speed
- Continuous reverse voltage
- Repetitive peak reverse voltage
- Repetitive peak forward current

HF




1 CATHODE 2 ANODE

Typical Applications

- High-speed switching in surface mounted circuits

Mechanical Data

- Case: SOD-523
- Molding Compound: UL Flammability Classification Rating 94V-0
- Terminals: Matte tin-plated leads; solderability-per MIL-STD-202, Method 208



SOD-523

Ordering Information

Part Number	Package	Shipping Quantity	Marking Code
BAS516	SOD-523	3000 pcs / Tape & Reel	61

Maximum Ratings (@ T_A = 25°C unless otherwise specified)

Parameter	Symbol	Value	Unit
Peak Repetitive Peak Reverse Voltage DC Blocking Voltage	V _{RRM} V _R	100	V
Continuous Forward Current	I _F	250	mA
Repetitive Forward Current	I _{FRM}	500	mA
Peak Forward Surge Current, t _p = 1μs	I _{FSM}	4	A
Peak Forward Surge Current, t _p = 1ms	I _{FSM}	1	A
Peak Forward Surge Current, t _p = 1s	I _{FSM}	0.5	A

Thermal Characteristics

Parameter	Symbol	Value	Unit
Power Dissipation	P _D	200	mW
Thermal Resistance Junction-to-Air *1	R _{θJA}	458	°C/W
Thermal Resistance Junction-to-Case *1	R _{θJC}	286	°C/W
Thermal Resistance Junction-to-Lead *1	R _{θJL}	324	°C/W
Operating Junction Temperature Range	T _J	-65 ~ +150	°C
Storage Temperature Range	T _{STG}	-65 ~ +150	°C

Electrical Characteristics (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Forward Voltage	V_F	$I_F = 1.0\text{mA}$	-	-	0.715	V
		$I_F = 10\text{mA}$	-	-	0.855	
		$I_F = 50\text{mA}$	-	-	1.0	
		$I_F = 150\text{mA}$	-	-	1.25	
Maximum Peak Reverse Current	I_R	$V_R = 25\text{V}, T_J = 25^\circ\text{C}$	-	-	30	nA
		$V_R = 25\text{V}, T_J = 125^\circ\text{C}$	-	-	30	μA
		$V_R = 75\text{V}, T_J = 25^\circ\text{C}$	-	-	1	
		$V_R = 75\text{V}, T_J = 150^\circ\text{C}$	-	-	50	
Total Capacitance	C_J	$V_R = 0\text{V}, f = 1.0\text{MHz}$	-	-	1	pF
Reverse Recovery Time	t_{rr}	$I_F = I_R = 10\text{mA}, R_L = 400\Omega$	-	-	4	ns

Note 1: The data tested by surface mounted on a 15mm * 15mm * 1mm FR4-epoxy P.C.B

Ratings and Characteristic Curves (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

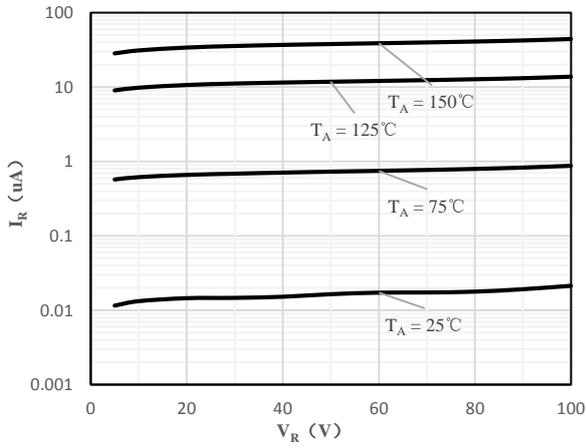


Fig 1 Typical Reverse Characteristic

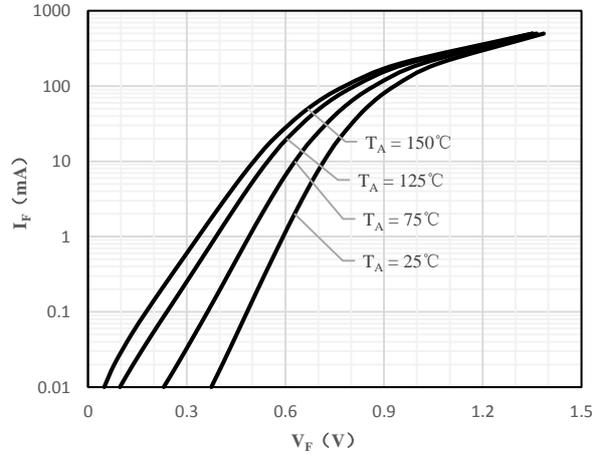


Fig 2 Typical Forward Characteristic

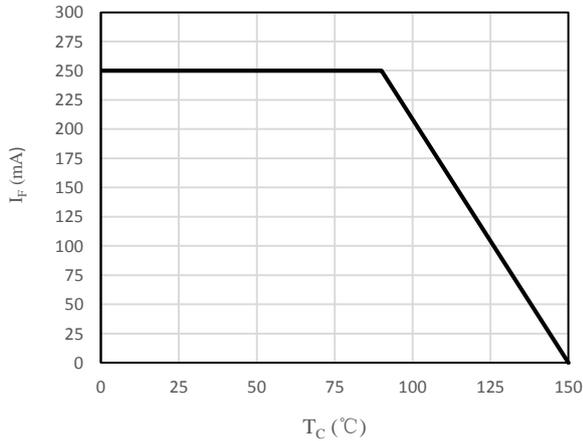


Fig 3 Current Derating Curve

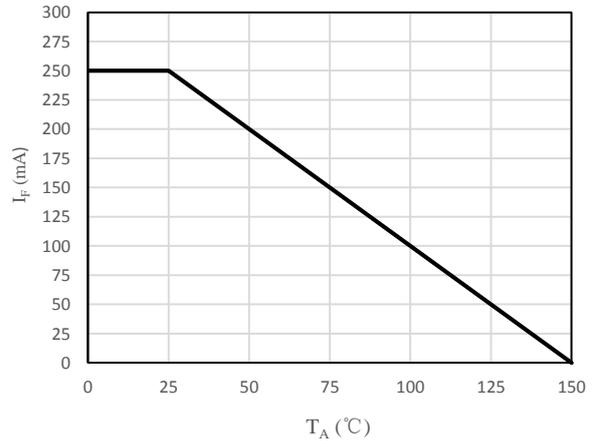


Fig 4 Current Derating Curve

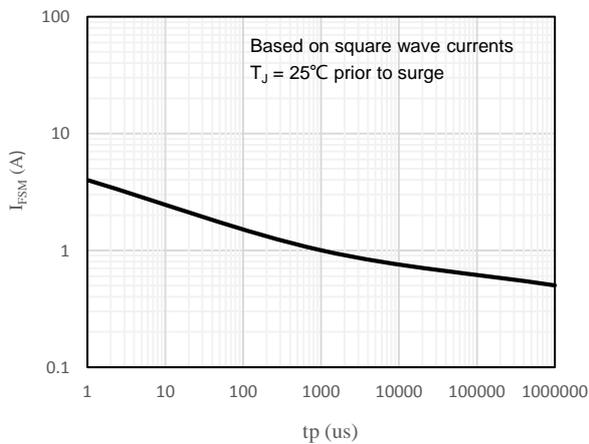


Fig 5 Non-repetitive peak forward current as a function of pulse duration; maximum values



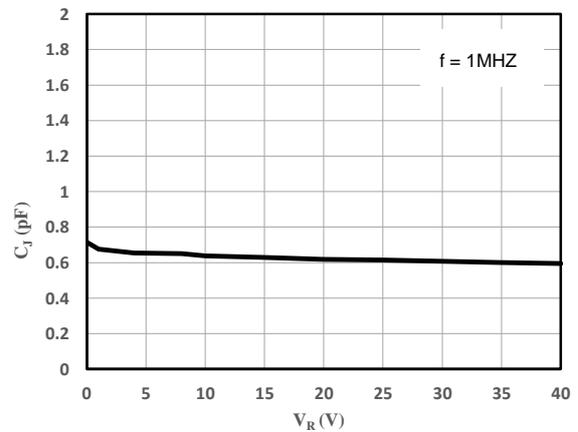


Fig 6 Diode capacitance as a function of reverse voltage; typical values

Package Outline Dimensions (Unit: mm)

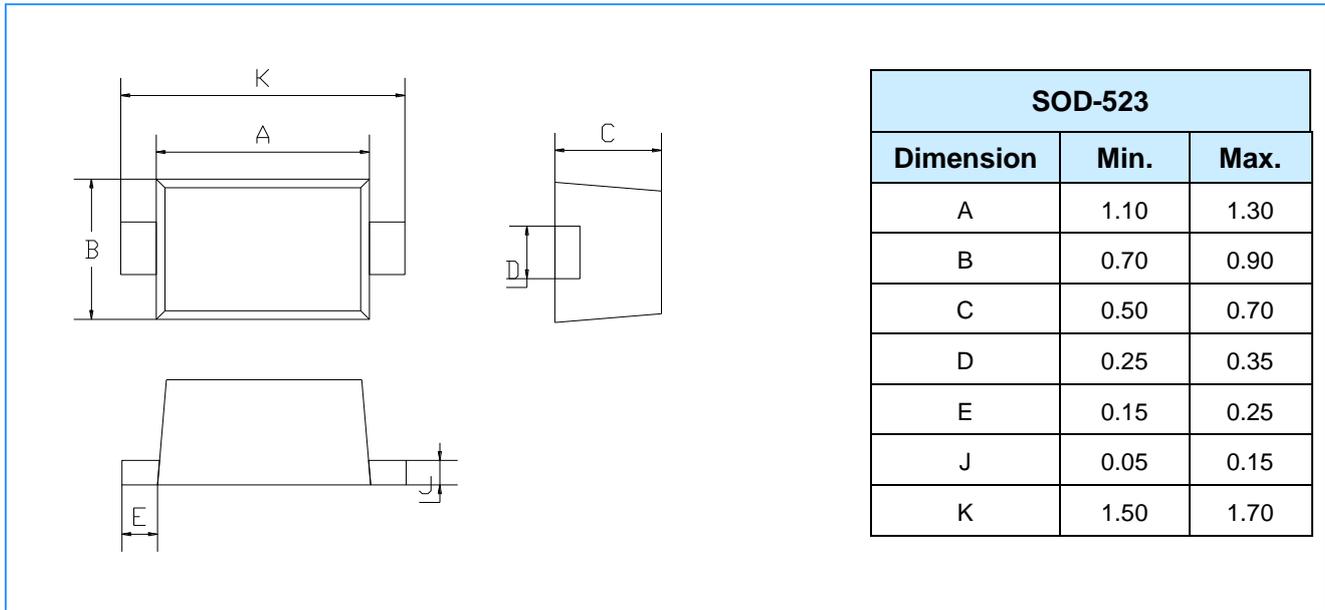

Mounting Pad Layout (Unit: mm)

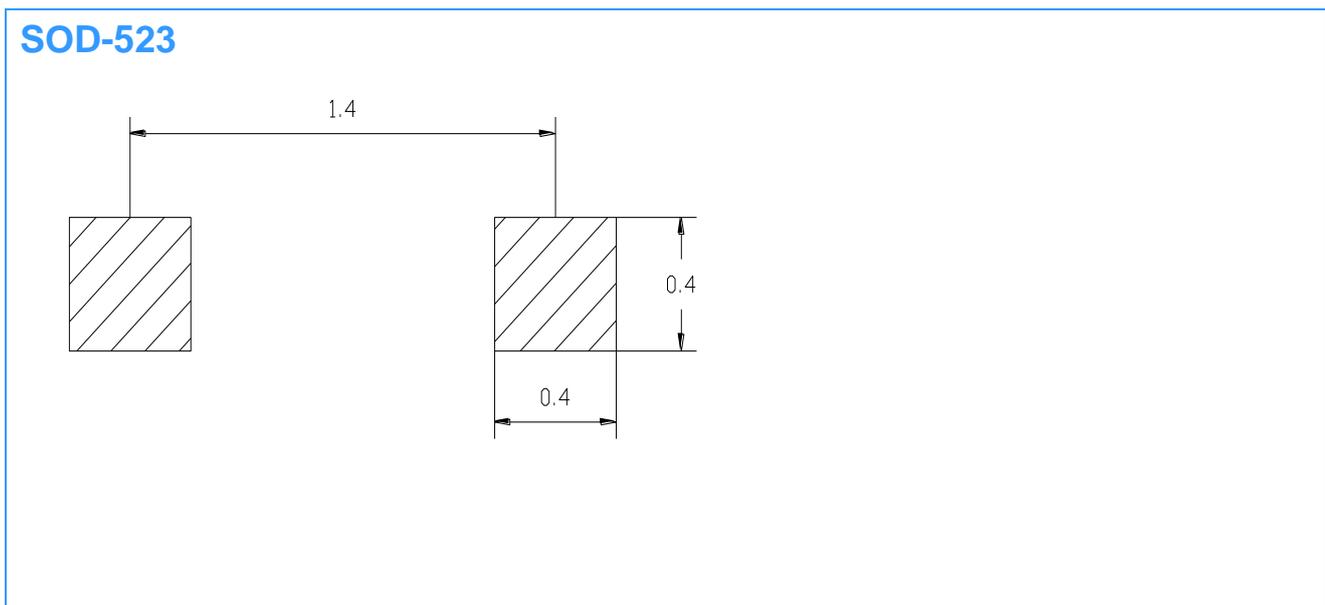

Important Notice

Changzhou Galaxy Century Microelectronics (GME) reserves the right to make changes without further notice to any product information (copyrighted) herein to make corrections, modifications, improvements, or other changes. GME does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others.