

## Surface Mount Fast Switching Diodes

### MMBD4448HCQW/AQW/ADW/CDW/SDW/TW

#### FEATURES


- High conductance.
- Fast switching speed.
- Ultra-small surface mount package.
- For general purpose switching application.



#### APPLICATIONS

- High speed switching application.

#### ORDERING INFORMATION

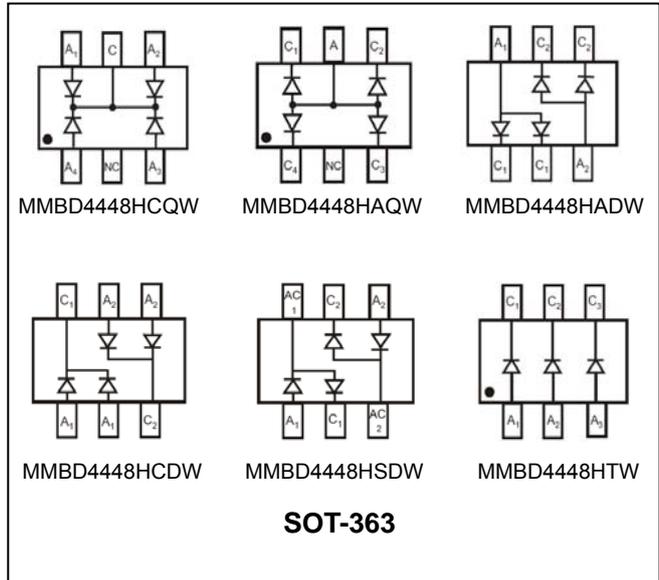

Type No.	Marking	Package Code
MMBD4448HCQW	KA4	SOT-363
MMBD4448HAQW	KA5	SOT-363
MMBD4448HADW	KA6	SOT-363
MMBD4448HCDW	KA7	SOT-363
MMBD4448HSDW	KAB	SOT-363
MMBD4448HTW	KAA	SOT-363

#### MAXIMUM RATING @ Ta=25°C unless otherwise specified

Symbol	Characteristic	Value	Unit
$V_{RM}$	Non-Repetitive peak reverse voltage	100	V
$V_{RRM}$	Repetitive peak reverse Voltage	80	V
$V_{RWM}$	Working peak reverse voltage		
$V_R$	DC reverse voltage		
$V_{R(RMS)}$	RMS Reverse voltage	57	V
$I_{FM}$	Forward continuous current	500	mA
$I_O$	Average rectified output current	250	mA
$I_{FSM}$	Forward surge current	@t=1.0μs	4.0
		@t=1.0s	2.0
$P_D$	Power Dissipation	200	mW
$R_{\theta JA}$	Thermal resistance, Junction to ambient air	625	°C/W
$T_j, T_{stg}$	Junction and Storage Temperature	-65 to +150	°C





## Surface Mount Fast Switching Diodes

### MMBD4448HCQW/AQW/ADW/CDW/SDW/TW

#### ELECTRICAL CHARACTERISTICS @ Ta=25°C unless otherwise specified

Parameter	Symbol	Test conditions	MIN	MAX	UNIT
Reverse breakdown voltage	$V_{(BR)R}$	$I_R=100\mu A$	80	-	V
Average reverse current	$I_R$	$V_R=70V$	-	100	nA
		$V_R=75V, T_j=150^\circ C$	-	50	$\mu A$
		$V_R=25V, T_j=150^\circ C$	-	30	$\mu A$
		$V_R=20V$	-	25	nA
Forward voltage	$V_F$	$I_F=5.0mA$	0.62	0.72	V
		$I_F=10mA$	-	0.855	
		$I_F=100mA$	-	1.0	
		$I_F=150mA$	-	1.25	
Total Capacitance	$C_T$	$V_R=6V, f=1.0MHz$	-	3.5	pF
Reverse Recovery time	$t_{rr}$	$I_F=5mA, V_R=6V$	-	4.0	ns

#### TYPICAL CHARACTERISTICS @ Ta=25°C unless otherwise specified

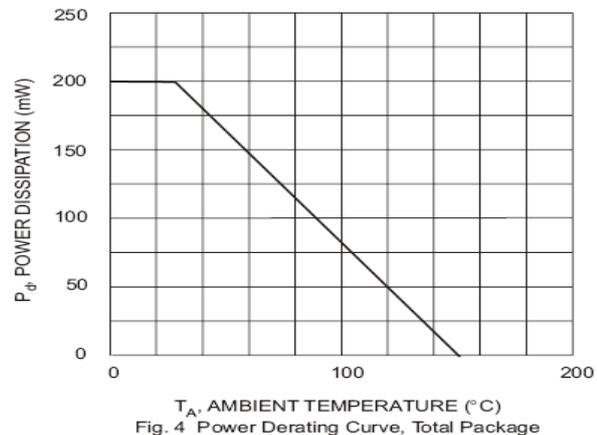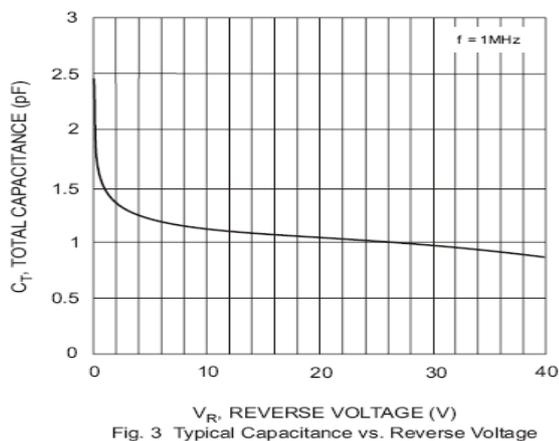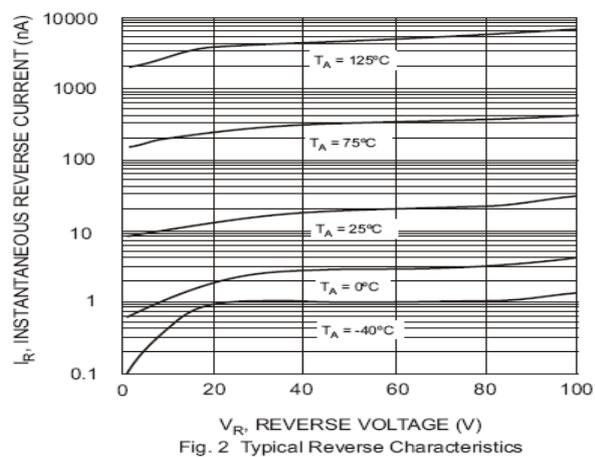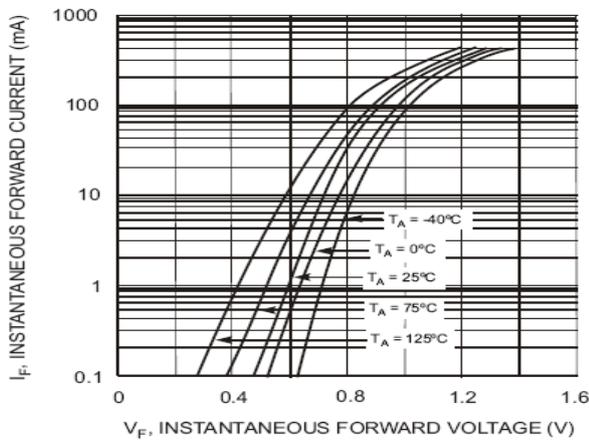


## Surface Mount Fast Switching Diodes

### MMBD4448HCQW/AQW/ADW/CDW/SDW/TW


#### PACKAGE OUTLINE

Plastic surface mounted package

SOT-363

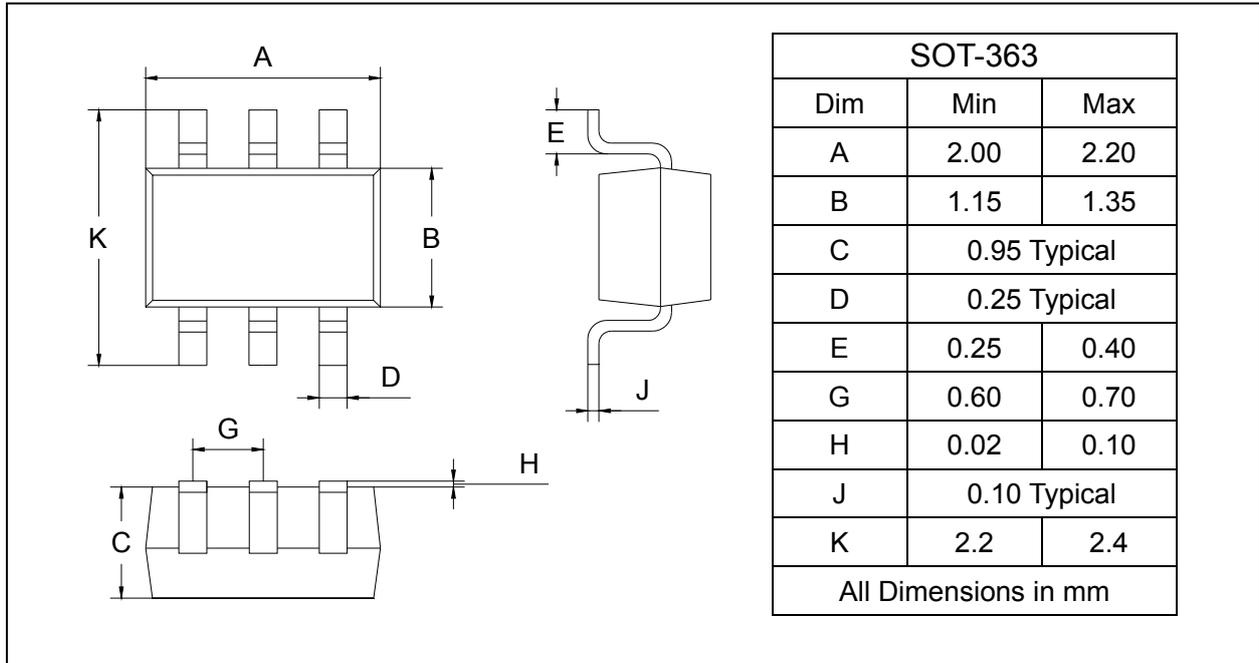

#### SOLDERING FOOTPRINT

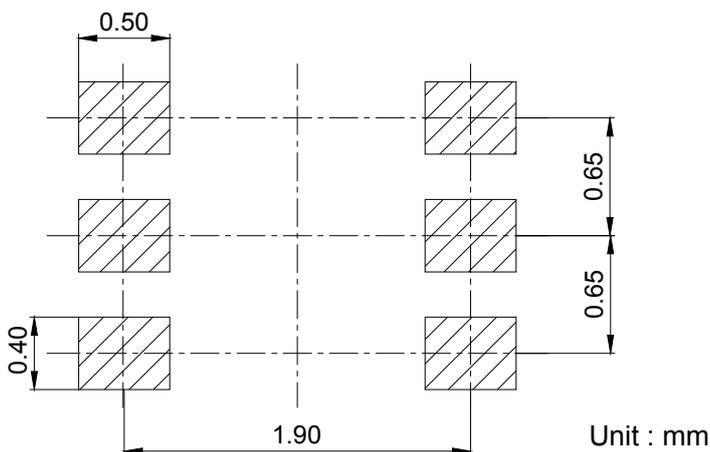

#### PACKAGE INFORMATION

Device	Package	Shipping
MMBD4448HCQW/AQW/ADW /CDW/SDW/TW	SOT-363	3000/Tape&Reel