



(v) Preliminary Specifications

() Final Specifications

| | |
|-------------------|-------------------------|
| Module | 27.0 Inch Color TFT-LCD |
| Model Name | G270ZAN01.1 |

| | |
|----------------------------------|-------------|
| Customer | Date |
| _____ | _____ |
| Checked & Approved by | Date |
| _____ | _____ |
| Customer's sign back page | |

| | |
|---|---------------------|
| Approved by | Date |
| <i>Crystal Hsieh</i> | <u>2017. 04. 05</u> |
| Prepared by | Date |
| <i>HsinYin Lee</i> | <u>2017. 04. 05</u> |
| General Display Business Division / AU Optronics corporation | |



2. General Description

This specification applies to the Color Active Matrix Liquid Crystal Display G270ZAN01.1 composed of a TFT-LCD display, a driver and power supply circuit, and a LED backlight system. The screen format is intended to support the UHD (3840(H) x 2160(V)) screen and 1.07B colors.

LED driving board for backlight unit is included. All input signals are 8 lanes V by one interface compatible.

2.1 Display Characteristics

The following items are characteristics summary on the table under 25 °C condition:

| Items | Unit | Specifications |
|---------------------------|---------|---|
| Screen Diagonal | [inch] | 26.93" (684mm) |
| Active Area | [mm] | 596.16 (H) x 335.34 (V) |
| Resolution | | 3840(x3) x 2160 |
| Pixel Pitch | [mm] | 0.15525 (per one triad) x 0.15525 |
| Pixel Arrangement | | R.G.B. Vertical Stripe |
| Display Mode | | AHVA mode, Normally Black |
| Nominal Input Voltage VDD | [Volt] | +12V (Typ) |
| Power Consumption | [Watt] | Total = 61.96W (Typ) (LCD =12.96W, BLU =49W) |
| Weight | [Grams] | 3400 (Typ) |
| Physical Size | [mm] | 630.0 (H) x 368.2 (V) x 22.9 (D) (Typ) |
| Electrical Interface | | 8-lanes V by one , 8bits RGB data input |
| Surface Treatment | | Anti-Glare treatment |
| Support Color | | 1.07B colors (8bit+Hi FRC) |
| Temperature Range | | |
| Operating | [°C] | 0 to +50 |
| Storage (Non-Operating) | [°C] | -20 to +60 |
| RoHS Compliance | | |

2.2 Optical Characteristics

The optical characteristics are measured under stable conditions at 25 °C (Room Temperature):

| Item | Unit | Conditions | Min. | Typ. | Max. | Note |
|---|-------------------|--------------------------------------|---------|-------|-------|------|
| White Luminance | cd/m ² | I _{LED} =75mA(center point) | 640 | 800 | | 1 |
| Uniformity | % | 9 points | 80 | 85 | | 2,3 |
| Contrast Ratio | -- | | 700 | 1000 | | 4 |
| Response Time | msec | Rising | | | | 5 |
| | | Falling | | | | |
| | | Rising + Falling | | 16 | 25 | |
| Viewing Angle | degree | Horizontal CR >= 10 | (Right) | 75 | 89 | 6 |
| | | | (Left) | 75 | 89 | |
| | | Vertical CR >= 10 | (Upper) | 70 | 89 | |
| | | | (Lower) | 70 | 89 | |
| Color / Chromaticity Coordinates (CIE 1931) | -- | Red x | 0.653 | 0.683 | 0.713 | |
| | | Red y | 0.272 | 0.302 | 0.332 | |
| | | Green x | 0.239 | 0.269 | 0.299 | |
| | | Green y | 0.625 | 0.655 | 0.685 | |
| | | Blue x | 0.119 | 0.149 | 0.179 | |
| | | Blue y | 0.012 | 0.042 | 0.072 | |
| | | White x | 0.283 | 0.313 | 0.343 | |
| | | White y | 0.299 | 0.329 | 0.359 | |
| Color Gamut | % | | | 90 | | |


Note 1: Measurement method

Equipment Pattern Generator, Power Supply, Digital Voltmeter, Luminance meter (SR_3 or equivalent)


Aperture 1□with 50cm viewing distance

Test Point Center

Environment < 1 lux

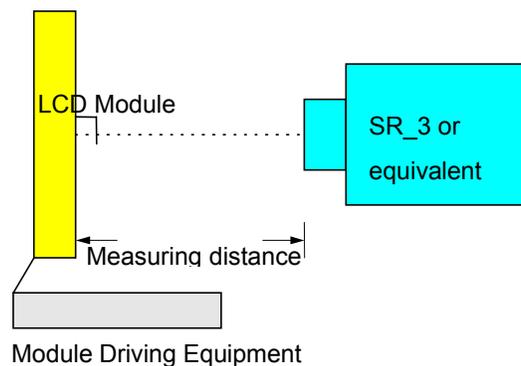

Note 2: Definition of 9 points position

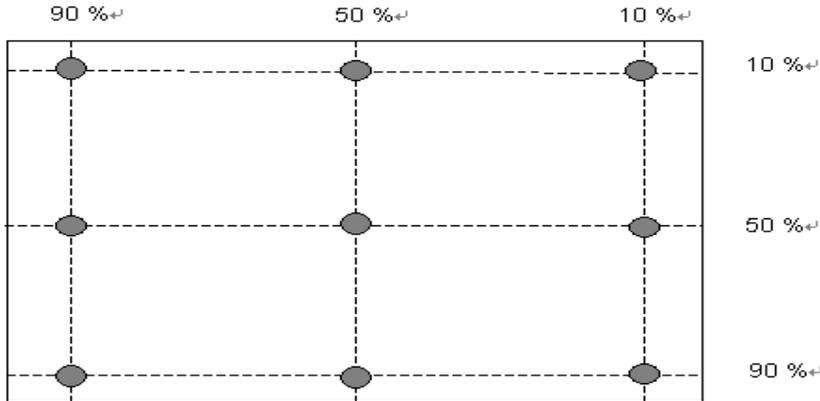

Note 3: The luminance uniformity of 9 points is defined by dividing the minimum luminance values by the maximum test point luminance


$$\delta_{w9} = \frac{\text{Minimum Brightness of nine points}}{\text{Maximum Brightness of nine points}}$$

Note 4: Definition of contrast ratio (CR):

$$\text{Contrast ratio (CR)} = \frac{\text{Brightness on the "White" state}}{\text{Brightness on the "Black" state}}$$

Note 5: Definition of response time:


The output signals of photo detector are measured when the input signals are changed from "White" to "Black" (falling time) and from "Black" to "White" (rising time), respectively. The response time interval is between 10% and 90% of amplitudes. Please refer to the figure as below.

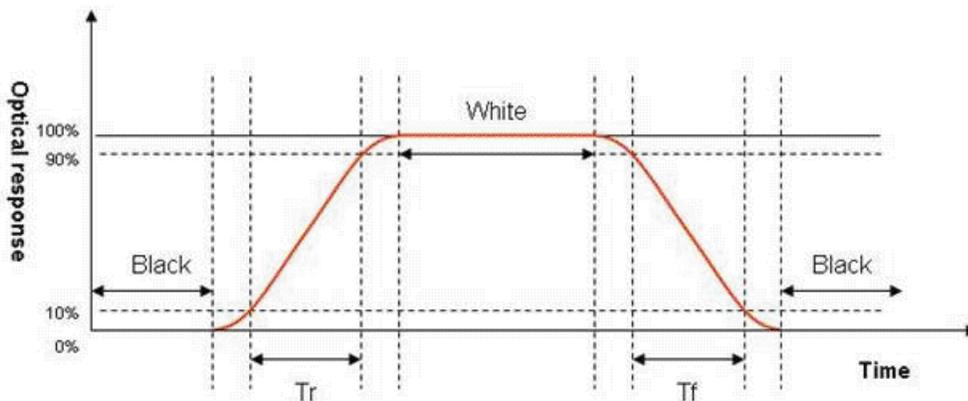

Note 6: Definition of viewing angle


Viewing angle is the measurement of contrast ratio ≥ 10 , at the screen center, over a 180° horizontal and 180° vertical range (off-normal viewing angles). The 180° viewing angle range is broken down as below: 90° (θ) horizontal left and right, and 90° (Φ) vertical high (up) and low (down). The measurement direction is typically

perpendicular to the display surface with the screen rotated to its center to develop the desired measurement viewing angle.

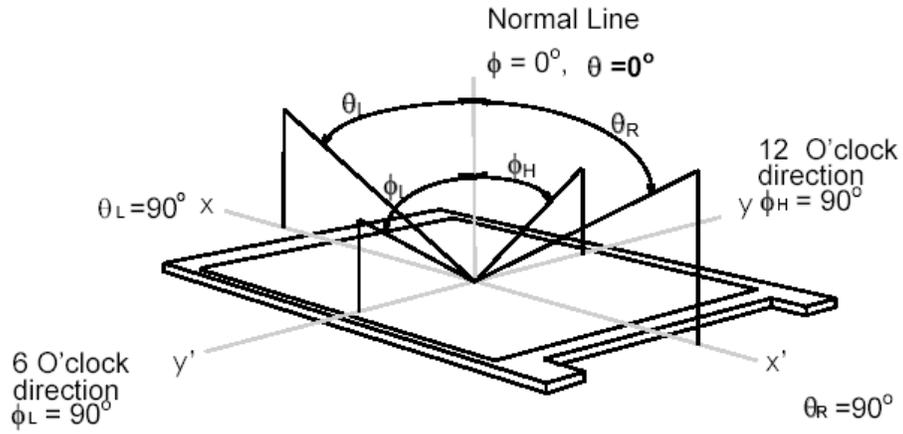

3. Functional Block Diagram

The following diagram shows the functional block of the 27.0 inch color TFT/LCD module:

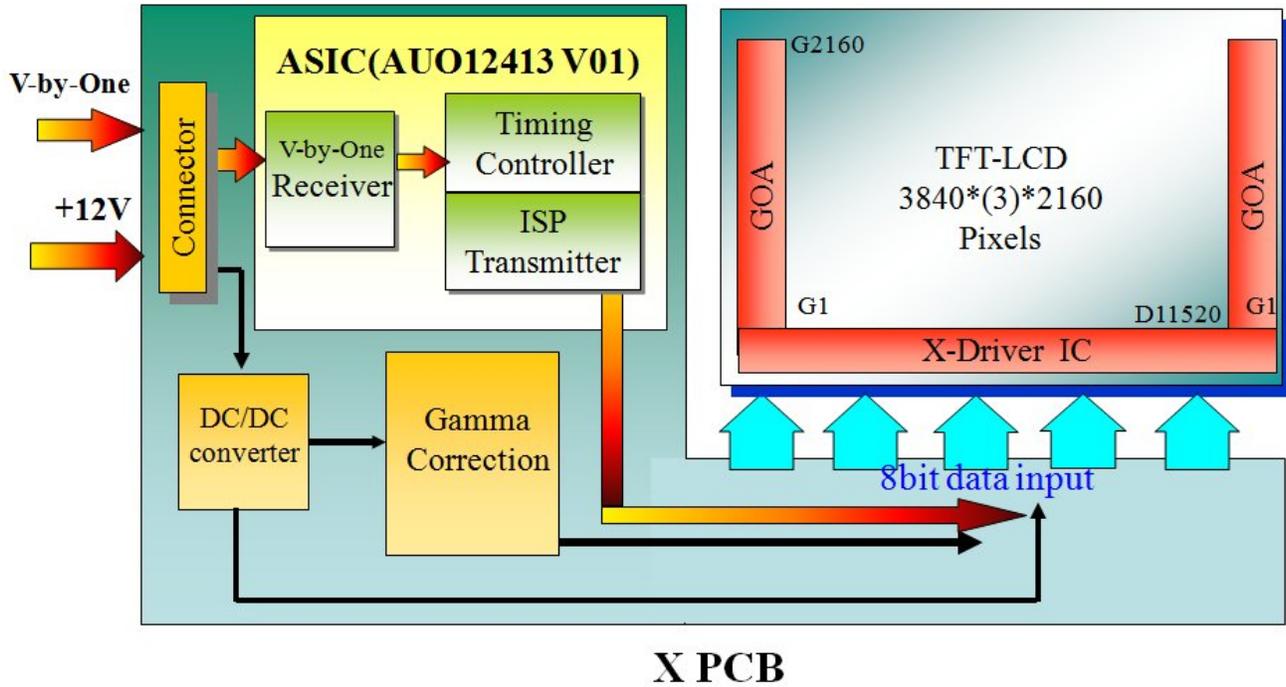

4. Absolute Maximum Ratings


4.1 Absolute Ratings of TFT LCD Module

| Item | Symbol | Min | Max | Unit |
|-------------------------|--------|---------|-----|--------|
| Logic/LCD drive Voltage | Vin | GND-0.3 | 14 | [Volt] |

4.2 Absolute Ratings of Environment

| Item | Symbol | Min | Max | Unit |
|-----------------------|--------|-----|-----|-------|
| Operating Temperature | TOP | 0 | +50 | [°C] |
| Operation Humidity | HOP | 5 | 90 | [%RH] |
| Storage Temperature | TST | -20 | +60 | [°C] |
| Storage Humidity | HST | 5 | 90 | [%RH] |

Note: Maximum Wet-Bulb should be 39 °C and no condensation.

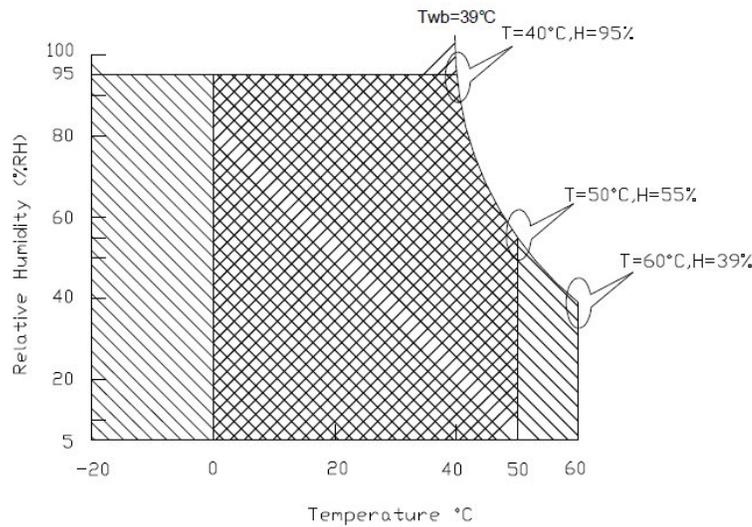

Operating Range 

Storage Range

 + 

5. Electrical Characteristics



5.1 TFT LCD Module

5.1.1 Power Specification

Input power specifications are shown as follows;

| Symbol | Parameter | Min | Typ | Max | Units | Remark |
|--------|----------------------------------|------|-------|---------|--------|-------------------------------------|
| VDD | Power supply Input voltage | 10.8 | 12.0 | 13.2 | [Volt] | |
| IDD | Power supply Input Current (RMS) | - | 1.08 | 1.3 | [A] | VDD= 12.0V, White pattern, Fv=60Hz |
| IRush | Inrush Current | - | - | 3.0 | [A] | Note 1 |
| PDD | VDD Power Consumption | - | 12.96 | 15.6 | [Watt] | VDD= 12.0V , White pattern, Fv=60Hz |
| VDDrp | Allowable VDD Ripple Voltage | - | - | VDD* 5% | [mV] | VDD= 12.0V, White pattern, Fv=60Hz |

Note 1: Measurement condition:

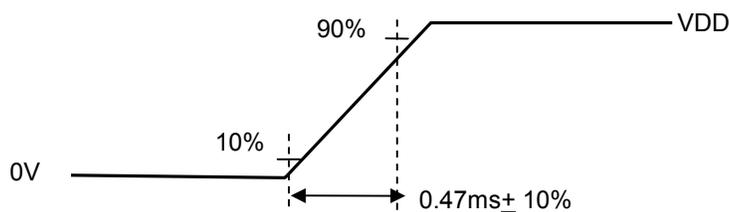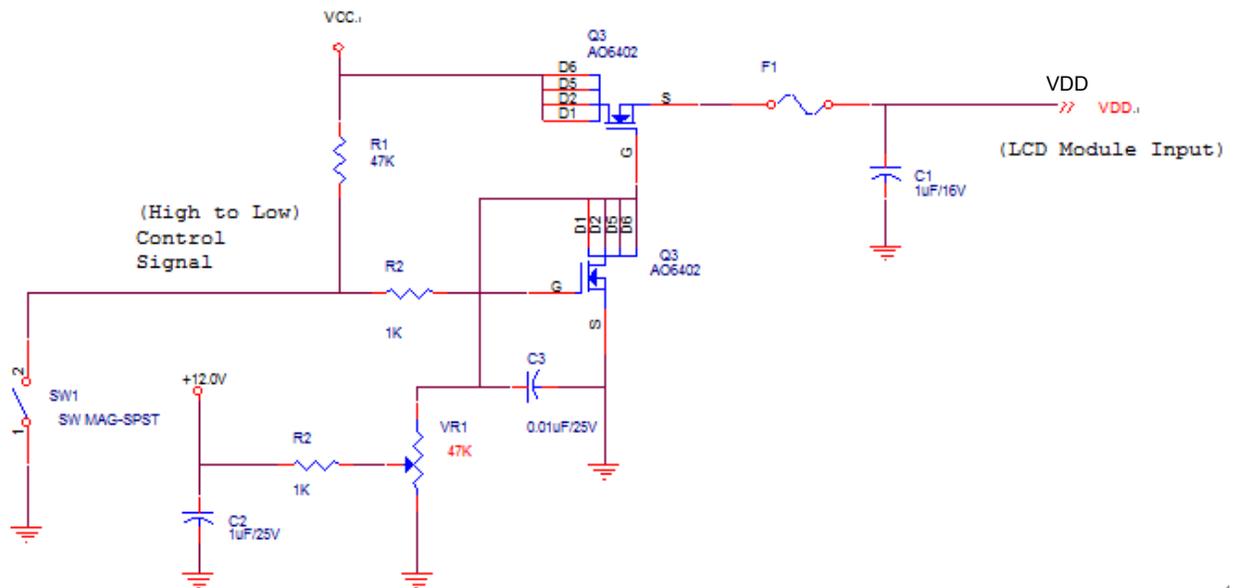

VDD rising time

5.2 Backlight Unit

5.2.1 LED Backlight Unit : Driver Connector

| | | |
|-----------|--------------|----------------------|
| Backlight | manufacturer | JST |
| | part number | S14B-PH-SM6-K-TB(HF) |
| Mating | manufacturer | JST |
| | part number | PHR-14 |

Signal for LED connector

| Pin # | Symbol | Pin Description |
|-------|---------|-----------------------------------|
| 1 | VDD | Power +24V |
| 2 | VDD | Power +24V |
| 3 | VDD | Power +24V |
| 4 | VDD | Power +24V |
| 5 | VDD | Power +24V |
| 6 | GND | GND |
| 7 | GND | GND |
| 8 | GND | GND |
| 9 | GND | GND |
| 10 | GND | GND |
| 11 | NC | Do not connect |
| 12 | EN | Enable(0V:disable, 2.5~5V:Enable) |
| 13 | Dimming | PWM; duty 10%~ 100% |
| 14 | NC | Do not connect |

5.2.3 Backlight input signal characteristics

Following characteristics are measured under a stable condition using an inverter at 25°C (Room Temperature):

| Symbol | Parameter | Min. | Typ. | Max. | Unit | Remark |
|------------------------------|-----------------------|--------|------|-------|--------|---|
| VDD | Input Voltage | 21.6 | 24.0 | 26.4 | [Volt] | |
| I _{VDD} | Input Current | | 2.05 | 2.4 | [A] | 100% PWM Duty |
| P _{VDD} | Power Consumption | | 49 | 57.6 | [Watt] | 100% PWM Duty |
| I _{rush LED} | Inrush Current | - | - | 6 | [A] | at rising time=470us |
| F _{PWM} | Dimming Frequency | | 0.2 | 20 | [kHz] | |
| | Swing Voltage | 3 | 3.3 | 5 | V | |
| | Dimming Duty Cycle | 10 | - | 100 | % | |
| I _{F (one channel)} | LED Forward Current | | 70 | | mA | Ta = 25°C |
| V _{F (one channel)} | LED Forward Voltage | - | - | - | Volt | |
| | | - | 33 | 37.4 | Volt | I _F =70 mA, Ta = 25°C 10 channel/LB & 2 LB/Panel |
| | | - | -3 | -3.4 | | |
| P _{LED (One LB)} | LED Power Consumption | - | 23.1 | 26.18 | Watt | I _F =70 mA, Ta = 25°C LBx2 : 26.18x2=52.4(Max) |
| LED Lifetime | | 30,000 | | | Hrs | I _F =70mA, Ta= 25°C |

Note 1: Ta means ambient temperature of TFT-LCD module.

Note 2: VDD, P_{VDD}, P_{VDD}, I_{rush LED} are defined for LED B/L.(100% duty of PWM dimming)

Note 3: I_F, V_F are defined for one channel LED. There are ten LED channels in one light bar. P_{LED} is defined for one light bar. For G270ZAN01.1, there are two light bars in back light unit.

Note 4: If G270ZAN01.1 module is driven by high current or at high ambient temperature & humidity condition. The operating life will be reduced.


Note 5: LED life means brightness goes down to 50% initial brightness.

Note 6: Only one kind types for adjusting brightness: PWM .

6 Signal Characteristic


6.1 Pixel Format Image

Following figure shows the relationship between input signal and LCD pixel format.

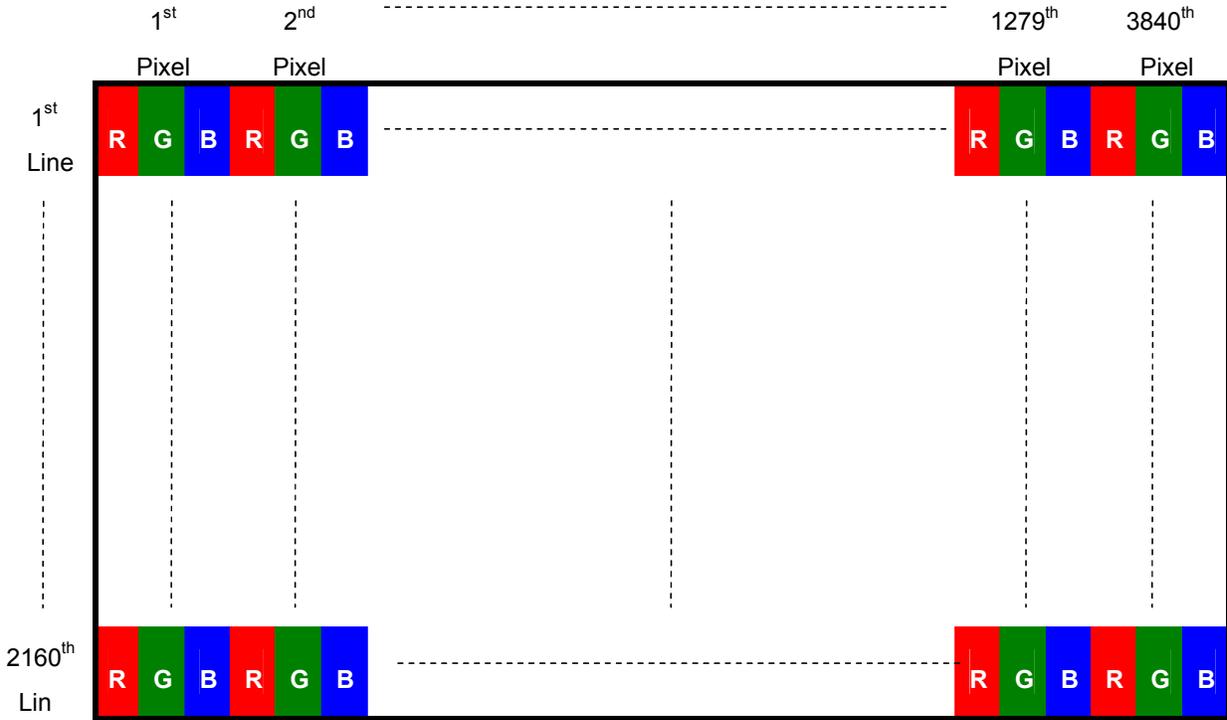

6.2 Scanning Direction

The following figures show the image seen from the front view. The arrow indicates the direction of scan.

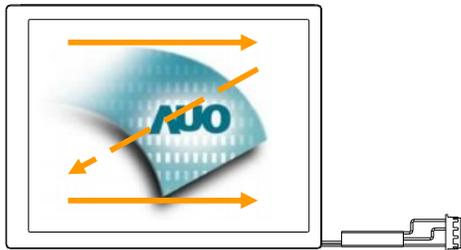



6.3 Signal Description

The module uses a LVDS receiver embedded in AUO's ASIC. LVDS is a differential signal technology for LCD interface and a high-speed data transfer device.


6.3.1 TFT LCD Module: LVDS Connector

| Connector Name / Designation | Signal Connector |
|------------------------------|------------------|
| Manufacturer | JAE |
| Connector Model Number | FI-RTE51SZ-HF |
| Adaptable Plug | FI-RE51CL |

| PIN # | SIGNAL NAME | DESCRIPTION |
|-------|-------------|--------------------------------|
| 1 | VCC | +12.0V Power Supply |
| 2 | VCC | +12.0V Power Supply |
| 3 | VCC | +12.0V Power Supply |
| 4 | VCC | +12.0V Power Supply |
| 5 | VCC | +12.0V Power Supply |
| 6 | VCC | +12.0V Power Supply |
| 7 | VCC | +12.0V Power Supply |
| 8 | VCC | +12.0V Power Supply |
| 9 | NC | Do not connect (for AUO test) |
| 10 | VSS | Power Ground |
| 11 | VSS | Power Ground |
| 12 | VSS | Power Ground |
| 13 | VSS | Power Ground |
| 14 | VSS | Power Ground |
| 15 | NC | Do not connect (for AUO test) |
| 16 | NC | Do not connect (for AUO test) |
| 17 | NC | Do not connect (for AUO test) |
| 18 | NC | Do not connect (for AUO test) |
| 19 | NC | Do not connect (for AUO test) |
| 20 | NC | Do not connect (for AUO test) |
| 21 | NC | Do not connect (for AUO test) |
| 22 | NC | Do not connect (for AUO test) |
| 23 | NC | Do not connect (for AUO test) |
| 24 | VSS | Power Ground |
| 25 | HTPDN | Vx1 HTPDN |
| 26 | LOCKN | Vx1 LOCK |
| 27 | VSS | Power Ground |
| 28 | RX0N | Vx1 lane0 |
| 29 | RX0P | Vx1 lane0 |



| | | |
|----|------|--------------|
| 30 | VSS | Power Ground |
| 31 | RX1N | Vx1 lane1 |
| 32 | RX1P | Vx1 lane1 |
| 33 | VSS | Power Ground |
| 34 | RX2N | Vx1 lane2 |
| 35 | RX2P | Vx1 lane2 |
| 36 | VSS | Power Ground |
| 37 | RX3N | Vx1 lane3 |
| 38 | RX3P | Vx1 lane3 |
| 39 | VSS | Power Ground |
| 40 | RX4N | Vx1 lane4 |
| 41 | RX4P | Vx1 lane4 |
| 42 | VSS | Power Ground |
| 43 | RX5N | Vx1 lane5 |
| 44 | RX5P | Vx1 lane5 |
| 45 | VSS | Power Ground |
| 46 | RX6N | Vx1 lane6 |
| 47 | RX6P | Vx1 lane6 |
| 48 | VSS | Power Ground |
| 49 | RX7N | Vx1 lane7 |
| 50 | RX7P | Vx1 lane7 |
| 51 | VSS | Power Ground |


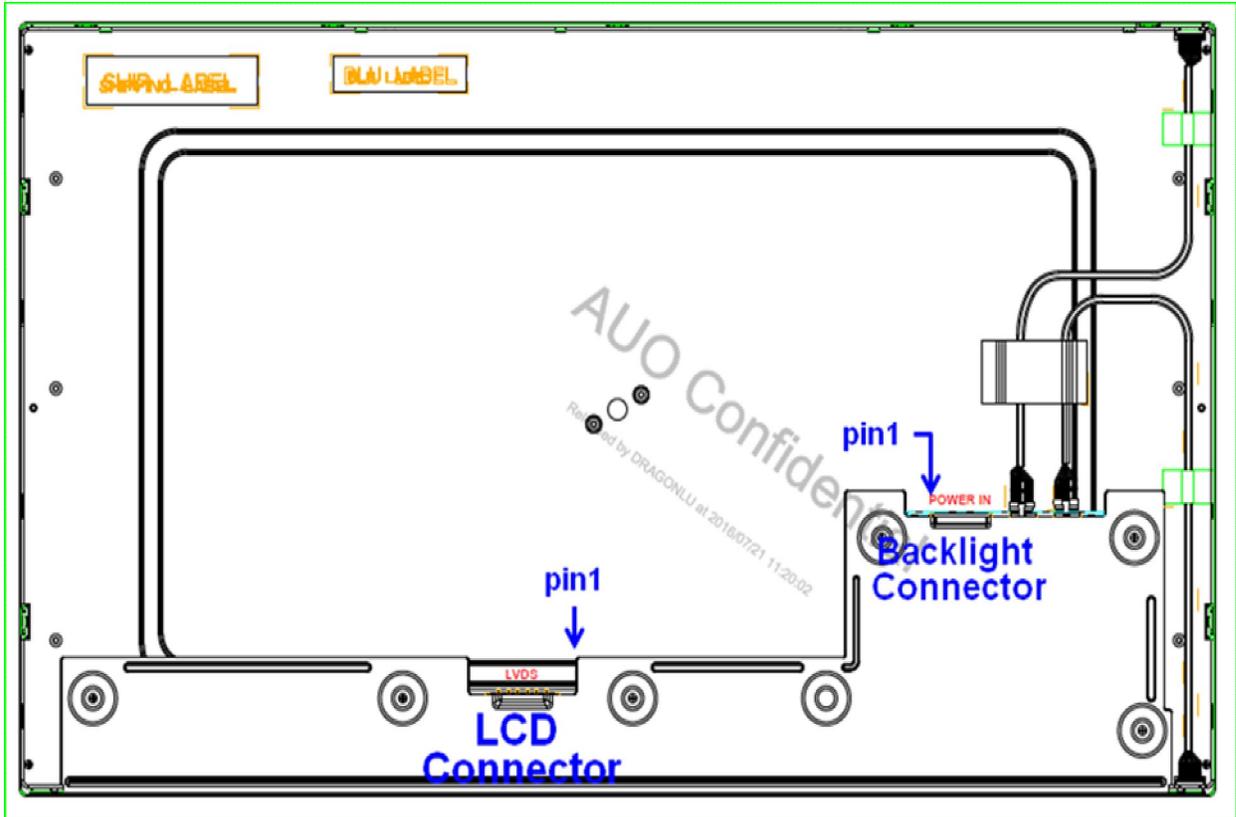


6.4.2 The Input Data Format

| Mode | Packer input & Unpacker output | 30bpp RGB / YCbCr444 (10bit) | |
|------------|--------------------------------|------------------------------|---------|
| 4byte mode | Byte0 | D[0] | R/Cr[2] |
| | | D[1] | R/Cr[3] |
| | | D[2] | R/Cr[4] |
| | | D[3] | R/Cr[5] |
| | | D[4] | R/Cr[6] |
| | | D[5] | R/Cr[7] |
| | | D[6] | R/Cr[8] |
| | Byte1 | D[7] | R/Cr[9] |
| | | D[8] | G/Y[2] |
| | | D[9] | G/Y[3] |
| | | D[10] | G/Y[4] |
| | | D[11] | G/Y[5] |
| | | D[12] | G/Y[6] |
| | | D[13] | G/Y[7] |
| | Byte2 | D[14] | G/Y[8] |
| | | D[15] | G/Y[9] |
| | | D[16] | B/Cb[2] |
| | | D[17] | B/Cb[3] |
| | | D[18] | B/Cb[4] |
| | | D[19] | B/Cb[5] |
| | | D[20] | B/Cb[6] |
| | Byte3 | D[21] | B/Cb[7] |
| | | D[22] | B/Cb[8] |
| | | D[23] | B/Cb[9] |
| | | D[24] | - - |
| | | D[25] | - - |
| | | D[26] | B/Cb[0] |
| | | D[27] | B/Cb[1] |
| | D[28] | G/Y[0] | |
| | D[29] | G/Y[1] | |
| | D[30] | R/Cr[0] | |
| D[31] | R/Cr[1] | | |

6.4.3 Timing Diagram

(Lane1~8 V By One data:1, 2, 3, 4, 1921, 1922, 1923, 1924)

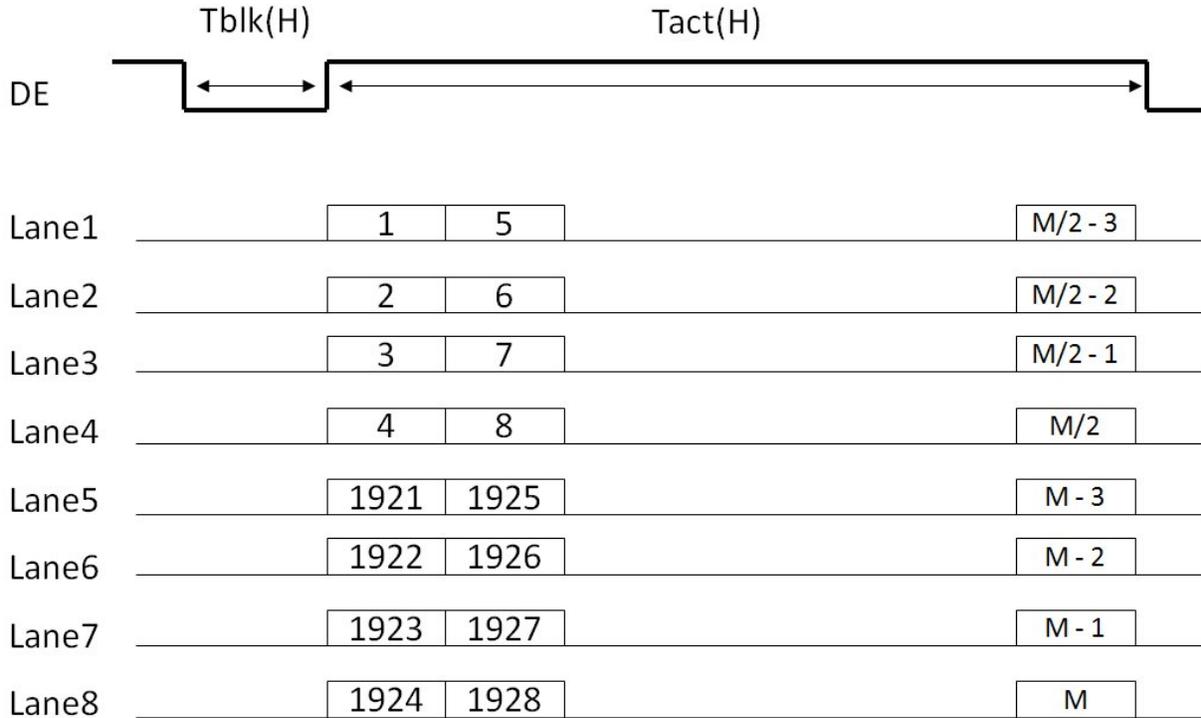



6.5 Interface Timing

6.5.1 Timing Characteristics

| Signal | Item | Symbol | Min | Typ | Max | Unit |
|--------------------|-----------|--------------------|-------|-------|-------|------|
| Vertical Section | Period | Tv | 2200 | 2250 | 2660 | Th |
| | Active | Tdisp(v) | - | 2160 | - | Th |
| | Blanking | Tbp(v)+Tfp(v)+PWvs | 40 | 90 | 500 | Th |
| Horizontal Section | Period | Th | 530 | 550 | 600 | Tclk |
| | Active | Tdisp(h) | - | 480 | - | Tclk |
| | Blanking | Tbp(h)+Tfp(h)+PWhs | 50 | 70 | 120 | Tclk |
| Clock | Period | Tclk | 15.15 | 13 | 12.98 | ns |
| | Frequency | Freq. | 66 | 74.25 | 77 | MHz |
| Frame Rate | Frequency | 1/Tv | 45 | 60 | 63 | Hz |


Note : DE mode only




6.5.2 V-By-One Spec

| Item | Symbol | Min. | Typ. | Max | Unit | Note | |
|---------------------------|---|-------------|------|-----|------|------------------|---|
| V-by-one Interface | VRXINP/N input each bit Period | TRRIP | 310 | -- | 379 | ps | 1 |
| | CDR training pattern time | TLOCK | -- | 500 | -- | us | 1 |
| | Latency from LOCKN 'HIGH' to clock training pattern | L1 | 0 | -- | -- | us | 1 |
| | Latency from LOCKN 'LOW' to normal 8b10b data | L2 | -- | -- | 70 | us | 1 |
| | CML Differential Input High Threshold | V_{RTH} | +50 | | | mV _{DC} | |
| | CML Differential Input Low Threshold | V_{RTL} | | | -50 | mV _{DC} | |
| | CML Common mode Bias Voltage | V_{RCT} | 0.8 | 0.9 | 1.0 | mV _{DC} | |
| | Intra-pair skew | T_{INTRA} | -- | -- | 0.3 | UI | 2 |
| | Inter-pair skew | T_{INTER} | -- | -- | 5 | UI | 3 |


1. V-By-One Signal diagram

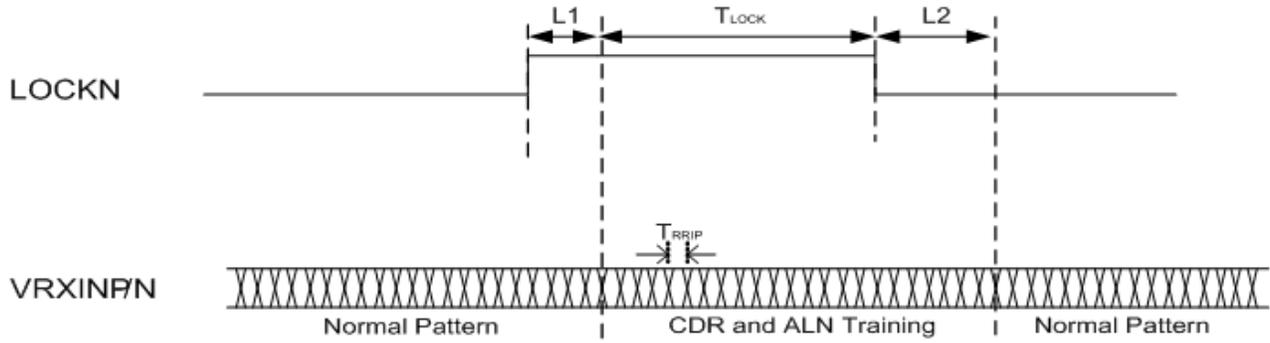

2. V-By-One intra-pair Skew

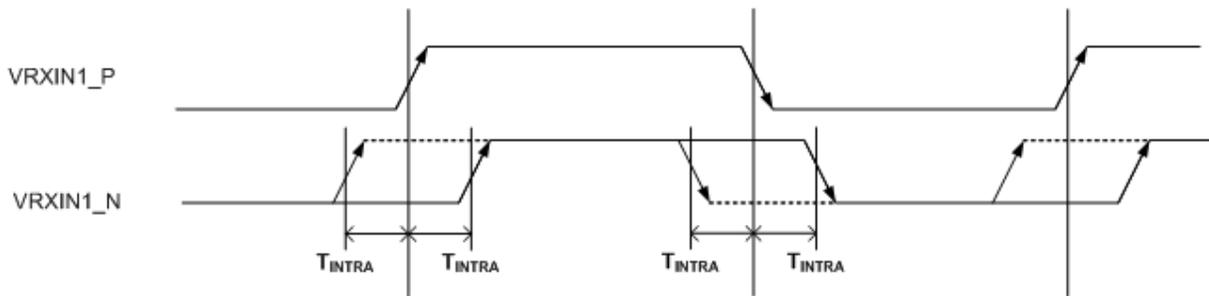


3. V-By-One intra-pair Skew

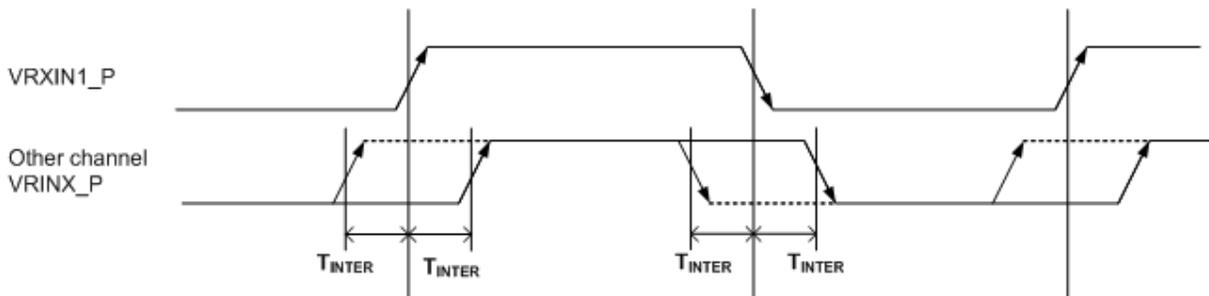

6.5.3 V-By-One Spec


| Item | Symbol | Min. | Typ. | Max | Unit | Note | |
|--------------------|-------------------------|------|------|------|------|------|----|
| V-by-one Interface | Eye diagram at receiver | A_X | -- | 0.25 | -- | UI | 1. |
| | | A_Y | -- | 0 | -- | mV | |
| | | B_X | -- | 0.3 | -- | UI | |
| | | B_Y | -- | 50 | -- | mV | |
| | | C_X | -- | 0.7 | -- | UI | |
| | | C_Y | -- | 50 | -- | mV | |
| | | D_X | -- | 0.75 | -- | UI | |
| | | D_Y | -- | 0 | -- | mV | |
| | | E_X | -- | 0.7 | -- | UI | |
| | | E_Y | -- | -50 | -- | mV | |
| | | F_X | -- | 0.3 | -- | UI | |
| | | F_Y | -- | -50 | -- | mV | |

1. Eye Mask

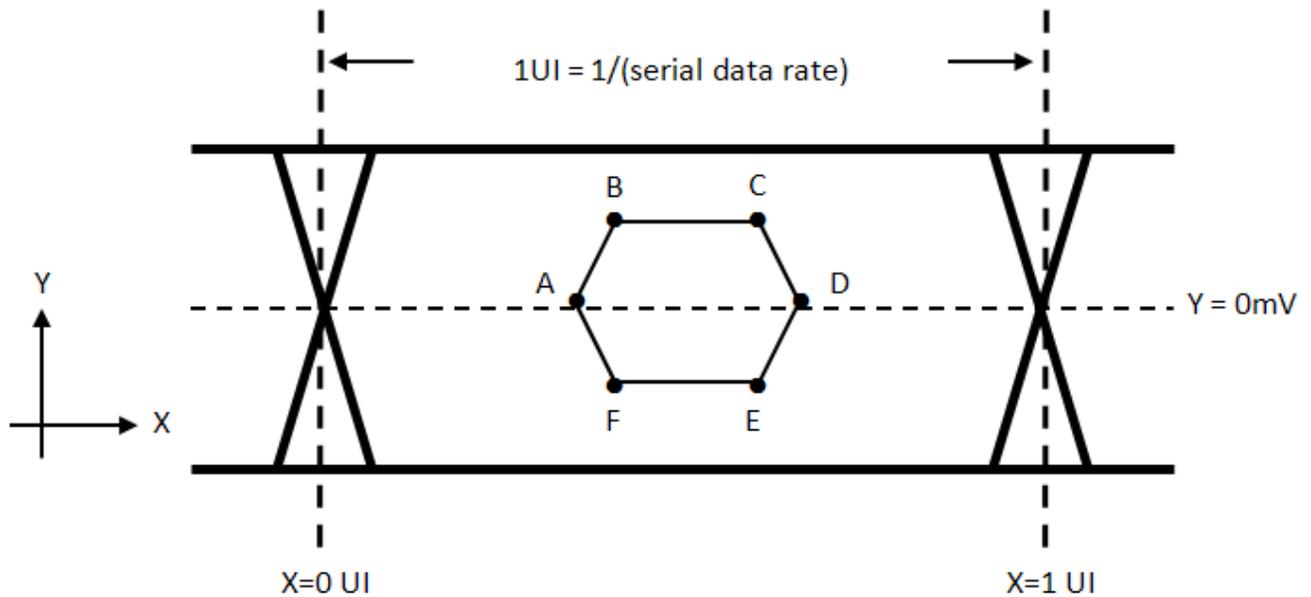

6.6 Power ON/OFF Sequence

VDD power and lamp on/off sequence is as below. Interface signals are also shown in the chart. Signals from any system shall be Hi-Z state or low level when VDD is off.

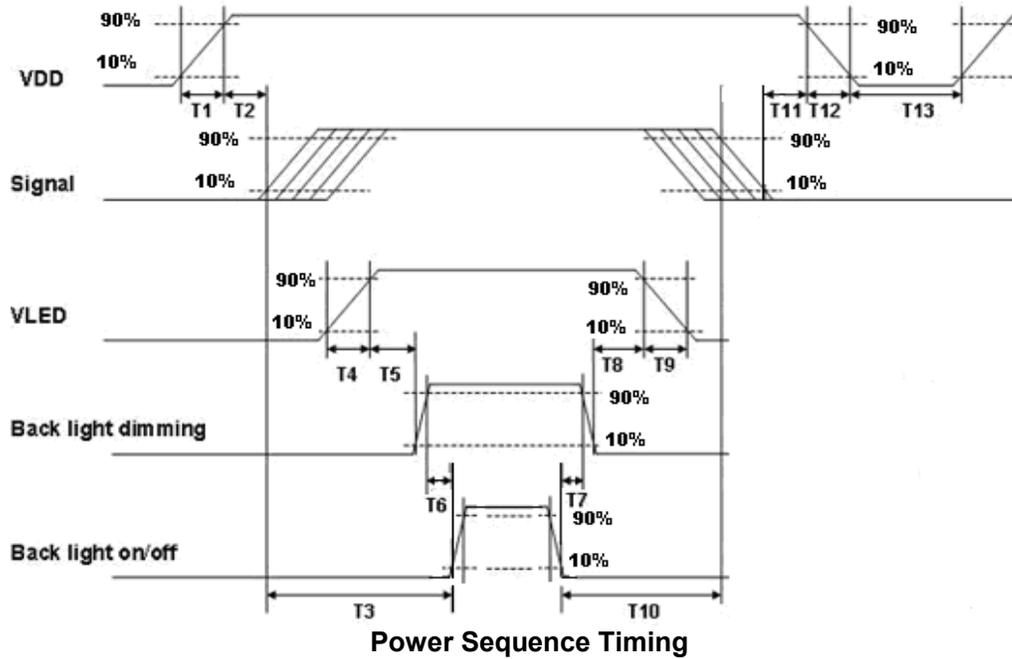

| Power Sequence Timing | | | | |
|-----------------------|-------|------|------|-------|
| Parameter | Value | | | Units |
| | Min. | Typ. | Max. | |
| T1 | 0.5 | - | 10 | ms |
| T2 | 30 | 40 | 50 | |
| T3 | 200 | - | -- | |
| T4 | 0.5 | - | 10 | |
| T5 | 10 | - | - | |
| T6 | 10 | - | - | |
| T7 | 0 | - | - | |
| T8 | 10 | - | - | |
| T9 | - | - | 10 | |
| T10 | 110 | - | - | |
| T11 | 0 | 16 | 50 | |
| T12 | 0 | - | 10 | |
| T13 | 1000 | - | - | |

7 Reliability Test Criteria

| Items | Required Condition | Note |
|-----------------------------------|---|----------|
| Temperature Humidity Bias (THB) | Ta= 50oC, 80%RH, 300hours | |
| High Temperature Operation (HTO) | Ta= 50oC, 300hours | |
| Low Temperature Operation (LTO) | Ta= 0oC, 300hours | |
| High Temperature Storage (HTS) | Ta= 60oC, 300hours | |
| Low Temperature Storage (LTS) | Ta= -20oC, 300hours | |
| Vibration Test (Non-operation) | Acceleration: 1.5 G Wave: Random Frequency: 10 - 200Hz Sweep: 30 Minutes each Axis (X, Y, Z) | |
| Shock Test (Non-operation) | Acceleration: 50 G Wave: Half-sine Active Time: 20 ms Direction: ±X, ±Y, ±Z (one time for each Axis) | |
| Drop Test | Height: 60 cm, package test | |
| Thermal Shock Test (TST) | -20 oC /30min, 60/ oC 30min, 100 cycles | 1 |
| On/Off Test | On/10sec, Off/10sec, 30,000 cycles | |
| ESD (Electrostatic Discharge) | Contact Discharge: ± 8KV, 150pF(330Ω) 1sec, 9 points, 25 times/ point. | 2 |
| | Air Discharge: ± 15KV, 150pF(330Ω) 1sec 9 points, 25 times/ point. | |
| Altitude Test | Operation:10,000 ft | |
| | Non-Operation:30,000 ft | |

Note 1: The TFT-LCD module will not sustain damage after being subjected to 100 cycles of rapid temperature change. A cycle of rapid temperature change consists of varying the temperature from -20°C to 50°C, and back again. Power is not applied during the test. After temperature cycling, the unit is placed in normal room ambient for at least 4 hours before power on.

Note 2: According to EN61000-4-2 , ESD class B: Some performance degradation allowed. No data lost. Self-recoverable. No hardware failures.


Note 3:

- Water condensation is not allowed for each test items.
- Each test is done by new TFT-LCD module. Don't use the same TFT-LCD module repeatedly for reliability test.
- The reliability test is performed only to examine the TFT-LCD module capability.
- To inspect TFT-LCD module after reliability test, please store it at room temperature and room humidity for 24 hours at least in advance.
- No function failure occurs.



8 Mechanical Characteristics

8.1 LCM Outline Dimension

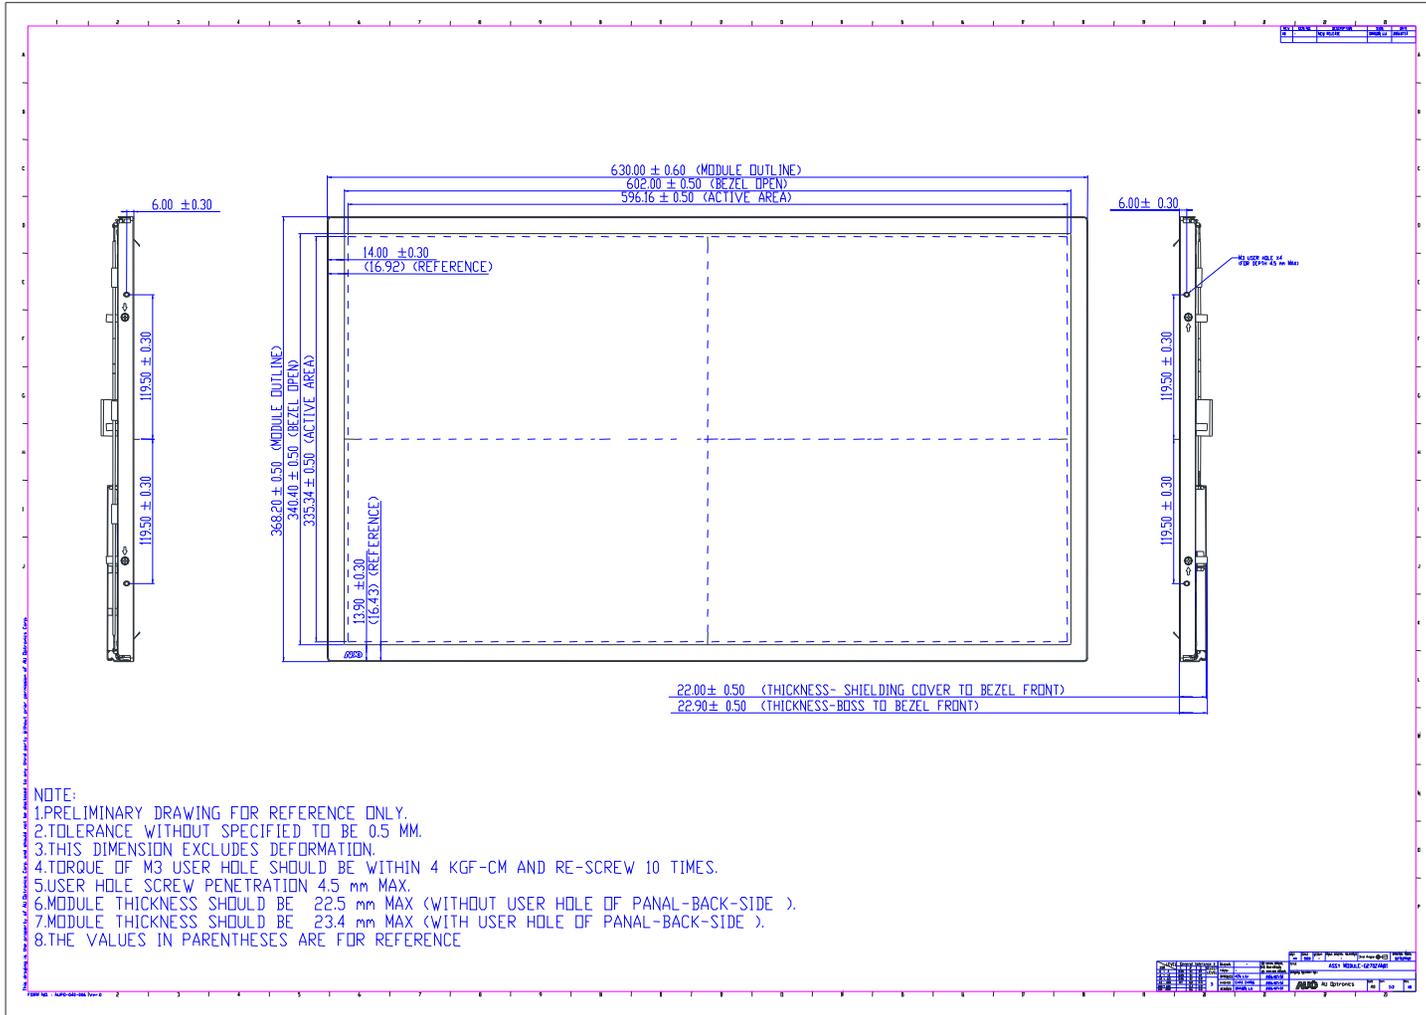

9 Label and Packaging

9.1 Shipping Label (on the rear side of TFT-LCD display)



Note 1: For Pb Free products, AUO will add  for identification.


Note 2: For RoHS compatible products, AUO will add  for identification.

Note 3: For China RoHS compatible products, AUO will add  for identification.

Note 4: The Green Mark will be presented only when the green documents have been ready by AUO Internal Green Team.

9.2 Carton Package

V5

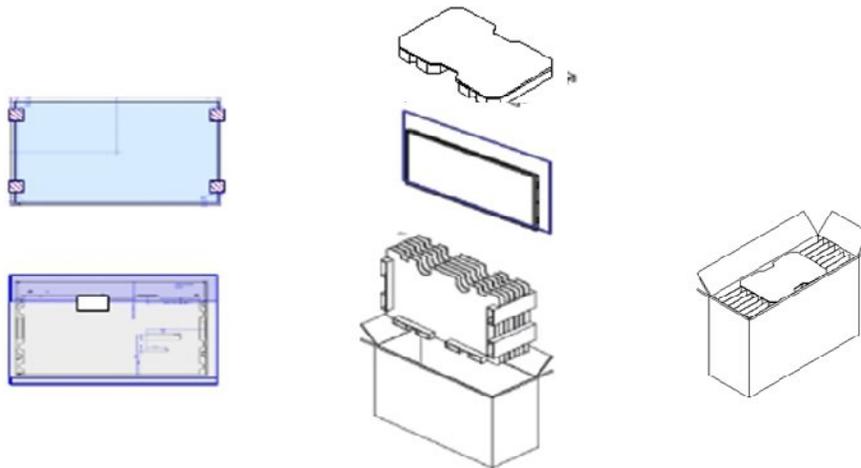

- Max capacity : 5 PCS TFT-LCD module per carton
- Max weight: 20 kg per carton
- Outside dimension of carton: 730mm(L)* 265mm(W)*470mm(H)
- Pallet size : 1150 mm * 840 mm * 132mm
- Box stacked

Module by air_Max : (1 *4) *3 layers , one pallet put 12 boxes , total 60pcs module

Module by sea_Max : (1*4) *3 layers + (1 *4) *1 layers , two pallet put 16boxes , total 80pcs module

Module by sea_HQ_Max : (1*4) *3 layers+(1*2) *1 layers, two pallet put 16boxes, total 80pcs module



10 Safety

10.1 Sharp Edge Requirements

There will be no sharp edges or comers on the display assembly that could cause injury.

10.2 Materials

10.2.1 Toxicity

There will be no carcinogenic materials used anywhere in the display module. If toxic materials are used, they will be reviewed and approved by the responsible AUO toxicologist.

10.2.2 Flammability

All components including electrical components that do not meet the flammability grade UL94-V1 in the module will complete the flammability rating exception approval process.

The printed circuit board will be made from material rated 94-V1 or better. The actual UL flammability rating will be printed on the printed circuit board.

10.3 Capacitors

If any polarized capacitors are used in the display assembly, provisions will be made to keep them from being inserted backwards.

10.4 National Test Lab Requirement

The display module will satisfy all requirements for compliance to:

UL 60950-1 second edition

U.S.A. Information Technology Equipment