



Features

- Complimentary to TBCW65
- High collector current
- High current gain
- Low collector-emitter saturation voltage

HF

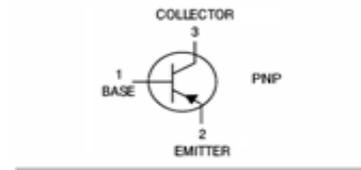

SOT-23

Mechanical Data

- Case: SOT-23
- Molding compound: UL flammability classification rating 94V-0
- Terminals: Tin-plated; solderability per MIL-STD-202, Method 208

Ordering Information

Part Number	Package	Shipping Quantity	Marking Code
BCW67A	SOT-23	3000 pcs / Tape & Reel	DA
BCW67B	SOT-23	3000 pcs / Tape & Reel	DB
BCW67C	SOT-23	3000 pcs / Tape & Reel	DC

Maximum Ratings (@ T_A = 25°C unless otherwise specified)

Parameter	Symbol	Value	Unit
Collector-Base Breakdown Voltage	V _{CBO}	-45	V
Collector-Emitter Breakdown Voltage	V _{CEO}	-32	V
Emitter-Base Breakdown Voltage	V _{EBO}	-5	V
Continuous Collector Current	I _C	-0.8	A
Peak Collector Current	I _{CM}	-1	A

Thermal Characteristics

Parameter	Symbol	Value	Unit
Power Dissipation	P _D	330	mW
Thermal Resistance Junction-to-Air ^{*1}	R _{θJA}	395	°C/W
Thermal Resistance Junction-to-Case ^{*1}	R _{θJC}	218	°C/W
Thermal Resistance Junction-to-Lead ^{*1}	R _{θJL}	191	°C/W
Operating junction Temperature	T _J	-55 ~ +150	°C
Storage Temperature Range	T _{STG}	-55 ~ +150	°C

Note 1: The data tested by surface mounted on a 15mm * 15mm * 1mm FR4-epoxy P.C.B

Electrical Characteristics (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter		Symbol	Test Condition	Min.	Typ.	Max.	Unit
Collector-Base Breakdown Voltage		$V_{(BR)CBO}$	$I_C = -10\mu\text{A}, I_E = 0$	-45	-	-	V
Collector-Emitter Breakdown Voltage		$V_{(BR)CEO}$	$I_C = -10\text{mA}, I_B = 0$	-32	-	-	V
Emitter-Base Breakdown Voltage		$V_{(BR)EBO}$	$I_E = -10\mu\text{A}, I_C = 0$	-5	-	-	V
Collector Cut-off Current		I_{CBO}	$V_{CB} = -32\text{V}, I_E = 0$	-	-	-20	nA
Emitter Cut-off Current		I_{EBO}	$V_{EB} = -4\text{V}, I_C = 0$	-	-	-20	nA
DC Current Gain	BCW67A	h_{FE}	$V_{CE} = -10\text{V}, I_C = -0.1\text{mA}$	35	-	-	-
	BCW67B			50	-	-	-
	BCW67C			80	-	-	-
	BCW67A		$V_{CE} = -1\text{V}, I_C = -10\text{mA}$	75	-	-	-
	BCW67B			120	-	-	-
	BCW67C			180	-	-	-
	BCW67A		$V_{CE} = -1\text{V}, I_C = -100\text{mA}$	100	-	250	-
	BCW67B			160	-	400	-
	BCW67C			250	-	630	-
	BCW67A		$V_{CE} = -2\text{V}, I_C = -500\text{mA}$	35			
	BCW67B			60			
	BCW67C			100			
Collector-emitter Saturation Voltage		$V_{CE(sat)}$	$I_C = -100\text{mA}, I_B = -10\text{mA}$	-	-	-0.3	V
			$I_C = -500\text{mA}, I_B = -50\text{mA}$	-	-	-0.7	V
Base-emitter Saturation Voltage		$V_{BE(sat)}$	$I_C = -100\text{mA}, I_B = -10\text{mA}$	-	-	-1.25	V
			$I_C = -500\text{mA}, I_B = -50\text{mA}$	-	-	-2	V
Transition Frequency		f_T	$I_C = -50\text{mA}, V_{CE} = -5\text{V}$ $f = 20\text{MHz}$	-	200	-	MHz

Ratings and Characteristics Curves (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

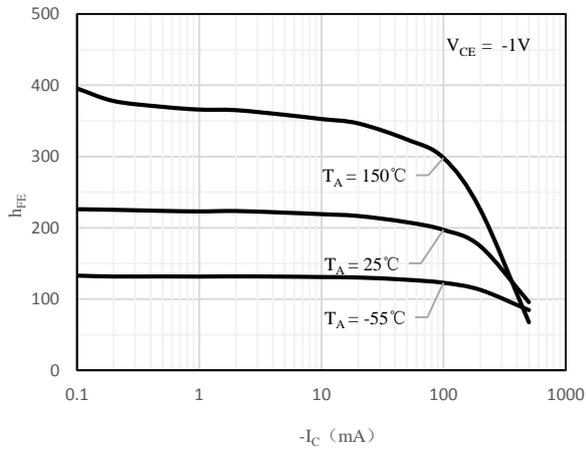


Fig 1 h_{FE} vs. I_C (BCW67A)

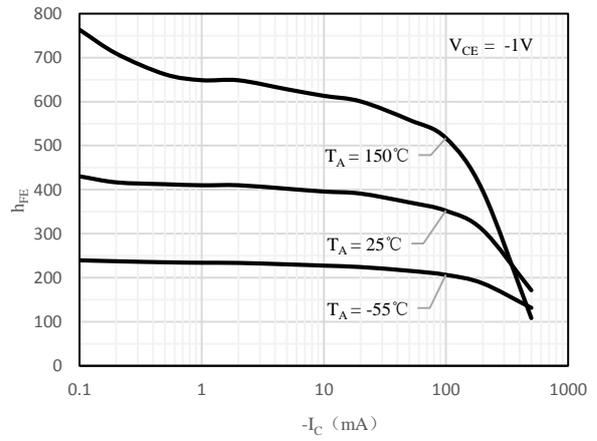


Fig 2 h_{FE} vs. I_C (BCW67B)

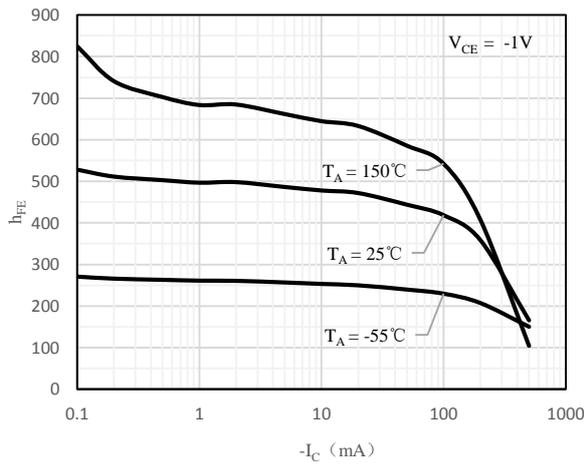


Fig 3 h_{FE} vs. I_C (BCW67C)

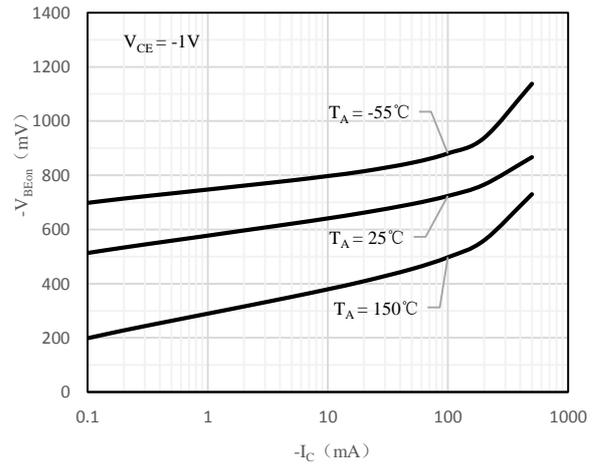


Fig 4 $V_{BE(ON)}$ vs. I_C

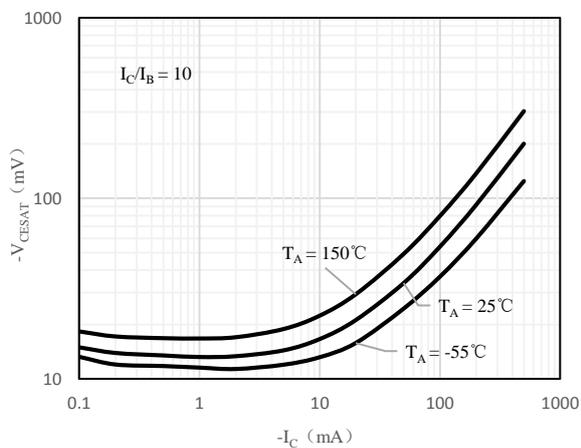


Fig 2 $V_{CE(sat)}$ vs. I_C



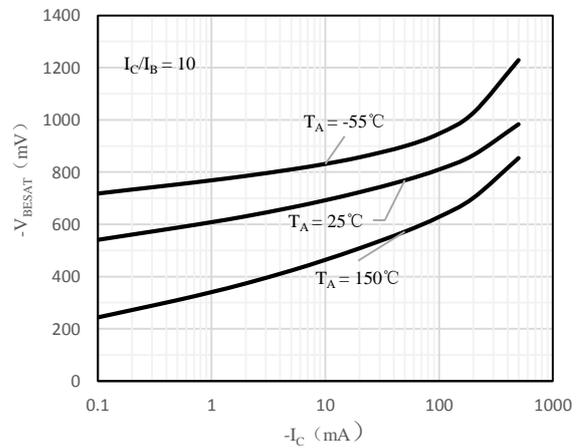


Fig 3 $V_{BE(sat)}$ vs. I_C

Package Outline Dimensions (Unit: mm)

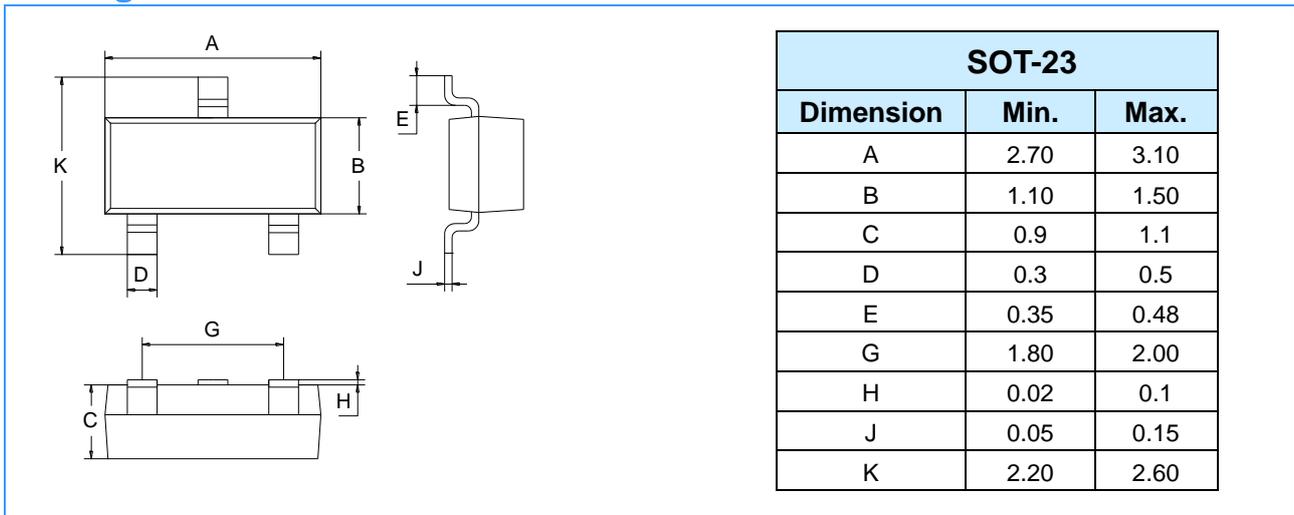

Package Outline Dimensions (Unit: mm)

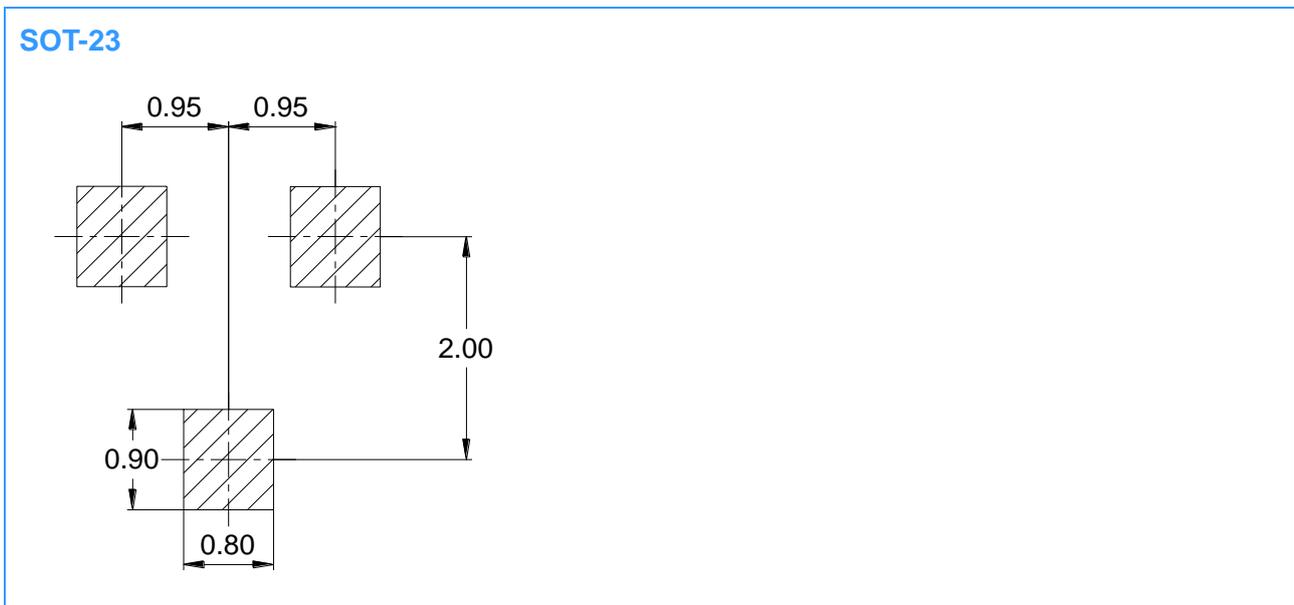

IMPORTANT NOTICE

Changzhou Galaxy Century Microelectronics (GME) reserves the right to make changes without further notice to any product information (copyrighted) herein to make corrections, modifications, improvements, or other changes. GME does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others.