



### FEATURES:

- SMD Package
- Single Output Models
- Low Ripple and Noise
- Industry Standard Pinout
- Input / Output Isolation 1500 & 3000 VDC
- Operating Temperature -40°C to +105°C
- RoHS Compliant
- Continuous Short Circuit Protection †

### Models Single output



Model	Input Voltage (V)	Output Voltage (V)	Output Current Max / Min (mA)	Isolation (VDC)	Input Current Max   No Load (mA)	Max Capacitive Load (µF)	Efficiency (%)
AM1LS-0303S-NZ†	2.97-3.63	3.3	303 / 30	1500	415   25	220	69
AM1LS-0305S-NZ†	2.97-3.63	5	200 / 20	1500	404   25	220	74
AM1LS-0309S-NZ†	2.97-3.63	9	111 / 12	1500	404   25	220	80
AM1LS-0312S-NZ†	2.97-3.63	12	84 / 9	1500	404   25	220	80
AM1LS-0315S-NZ†	2.97-3.63	15	67 / 7	1500	404   25	220	80
AM1LS-0324S-NZ†	2.97-3.63	24	42 / 4	1500	404   25	220	80
AM1LS-0503S-NZ	4.5-5.5	3.3	303 / 30	1500	263   20	220	76
AM1LS-0505S-NZ	4.5-5.5	5	200 / 20	1500	250   20	220	80
AM1LS-0505S-JZ	4.5-5.5	5	200 / 20	1500	286   10	2400	82
AM1LS-0506S-NZ	4.5-5.5	6	167 / 17	1500	250   20	220	80
AM1LS-0509S-NZ	4.5-5.5	9	111 / 12	1500	250   20	470	80
AM1LS-0512S-NZ	4.5-5.5	12	84 / 9	1500	250   20	220	80
AM1LS-0515S-NZ	4.5-5.5	15	67 / 7	1500	250   20	220	80
AM1LS-0524S-NZ †	4.5-5.5	24	42 / 4	1500	250   20	220	80
AM1LS-1203S-NZ	10.8-13.2	3.3	303 / 30	1500	111   15	220	75
AM1LS-1205S-NZ	10.8-13.2	5	200 / 20	1500	104   15	220	80
AM1LS-1209S-NZ	10.8-13.2	9	111 / 12	1500	104   15	220	80
AM1LS-1212S-NZ	10.8-13.2	12	84 / 9	1500	103   15	220	81
AM1LS-1215S-NZ	10.8-13.2	15	67 / 7	1500	103   15	220	81
AM1LS-1224S-NZ	10.8-13.2	24	42 / 4	1500	103   15	220	81
AM1LS-1505S-NZ	13.5-16.5	5	200 / 20	1500	82   10	220	80
AM1LS-1509S-NZ	13.5-16.5	9	111 / 12	1500	82   10	220	80
AM1LS-1515S-NZ	13.5-16.5	15	67 / 7	1500	82   10	220	81
AM1LS-2403S-NZ†	21.6-26.4	3.3	303 / 30	1500	52   7	220	71
AM1LS-2405S-NZ†	21.6-26.4	5	200 / 20	1500	52   7	220	80
AM1LS-2409S-NZ†	21.6-26.4	9	111 / 12	1500	52   7	220	80
AM1LS-2412S-NZ†	21.6-26.4	12	84 / 9	1500	52   7	220	80
AM1LS-2415S-NZ†	21.6-26.4	15	67 / 7	1500	51   7	220	81
AM1LS-2424S-NZ†	21.6-26.4	24	42 / 4	1500	51   7	220	81
AM1LS-0303SH30-NZ	2.97-3.63	3.3	303 / 30	3000	415   25	220	73
AM1LS-0305SH30-NZ	2.97-3.63	5	200 / 20	3000	388   25	220	78
AM1LS-0503SH30-NZ	4.5-5.5	3.3	303 / 30	3000	263   20	220	76
AM1LS-0505SH30-NZ	4.5-5.5	5	200 / 20	3000	250   20	220	80
AM1LS-0509SH30-NZ	4.5-5.5	9	111 / 12	3000	250   20	220	80
AM1LS-0512SH30-NZ	4.5-5.5	12	84 / 9	3000	250   20	220	80
AM1LS-0515SH30-NZ	4.5-5.5	15	67 / 7	3000	250   20	220	80
AM1LS-0524SH30-NZ †	4.5-5.5	24	42 / 4	3000	250   20	220	80
AM1LS-1203SH30-NZ	10.8-13.2	3.3	303 / 30	3000	111   15	220	75
AM1LS-1205SH30-NZ	10.8-13.2	5	200 / 20	3000	104   15	220	80
AM1LS-1209SH30-NZ	10.8-13.2	9	111 / 12	3000	104   15	220	80
AM1LS-1212SH30-NZ	10.8-13.2	12	84 / 9	3000	103   15	220	81
AM1LS-1215SH30-NZ	10.8-13.2	15	67 / 7	3000	103   15	220	81
AM1LS-1224SH30-NZ	10.8-13.2	24	42 / 4	3000	103   15	220	81
AM1LS-1515SH30-NZ	13.5-16.5	15	67 / 7	3000	82   10	220	80
AM1LS-2405SH30-NZ†	21.6-26.4	5	200 / 20	3000	52   7	220	80

AM1LS-2409SH30-NZ‡	21.6-26.4	9	111 / 12	3000	52	7	220	80
AM1LS-2415SH30-NZ‡	21.6-26.4	15	84 / 9	3000	51	7	220	81
AM1LS-2424SH30-NZ‡	21.6-26.4	24	67 / 7	3000	51	7	220	81

## Models

### Dual output

Model	Input Voltage (V)	Output Voltage (V)	Output Current Max / Min (mA)	Isolation (VDC)	Input Current Max   No Load (mA)	Max Capacitive Load(μF)	Efficiency (%)
AM1LS-0305D-NZ	2.97-3.63	±5	±100 / ±10	1500	415   25	100	78
AM1LS-0312D-NZ	2.97-3.63	±12	±42 / ±5	1500	388   25	100	80
AM1LS-0315D-NZ	2.97-3.63	±15	±33 / ±3	1500	263   20	100	80
AM1LS-0505D-NZ	4.5-5.5	±5	±100 / ±10	1500	250   20	100	80
AM1LS-0509D-NZ	4.5-5.5	±9	±56 / ±6	1500	250   20	100	80
AM1LS-0512D-NZ	4.5-5.5	±12	±42 / ±5	1500	250   20	100	81
AM1LS-0515D-NZ	4.5-5.5	±15	±33 / ±3	1500	250   20	100	81
AM1LS-0524D-NZ ‡	4.5-5.5	±24	±21 / ±2	1500	250   20	100	81
AM1LS-1205D-NZ	10.8-13.2	±5	±100 / ±10	1500	111   15	100	75
AM1LS-1209D-NZ	10.8-13.2	±9	±56 / ±6	1500	104   15	100	80
AM1LS-1212D-NZ	10.8-13.2	±12	±42 / ±5	1500	104   15	100	80
AM1LS-1215D-NZ	10.8-13.2	±15	±33 / ±3	1500	103   15	100	81
AM1LS-1224D-NZ	10.8-13.2	±24	±21 / ±2	1500	103   15	100	81
AM1LS-1515D-NZ	13.5-16.5	±15	±33 / ±3	1500	103   15	100	81
AM1LS-2405D-NZ‡	21.6-26.4	±5	±100 / ±10	1500	83   12	100	82
AM1LS-2409D-NZ‡	21.6-26.4	±9	±56 / ±6	1500	52   7	100	82
AM1LS-2412D-NZ‡	21.6-26.4	±12	±42 / ±5	1500	52   7	100	82
AM1LS-2415D-NZ‡	21.6-26.4	±15	±33 / ±3	1500	51   7	100	82
AM1LS-2424D-NZ‡	21.6-26.4	±24	±21 / ±2	1500	51   7	100	82
AM1LS-0305DH30-NZ	2.97-3.63	±5	±100 / ±10	3000	389   25	100	76
AM1LS-0312DH30-NZ	2.97-3.63	±12	±42 / ±5	3000	389   25	100	77
AM1LS-0505DH30-NZ	4.5-5.5	±5	±100 / ±10	3000	250   20	100	80
AM1LS-0509DH30-NZ	4.5-5.5	±9	±56 / ±6	3000	250   20	100	80
AM1LS-0512DH30-NZ	4.5-5.5	±12	±42 / ±5	3000	250   20	100	81
AM1LS-0515DH30-NZ	4.5-5.5	±15	±33 / ±3	3000	250   20	100	81
AM1LS-0524DH30-NZ ‡	4.5-5.5	±24	±21 / ±2	3000	250   20	100	81
AM1LS-1205DH30-NZ	10.8-13.2	±5	±100 / ±10	3000	111   15	100	80
AM1LS-1209DH30-NZ	10.8-13.2	±9	±56 / ±6	3000	104   15	100	80
AM1LS-1212DH30-NZ	10.8-13.2	±12	±42 / ±5	3000	104   15	100	81
AM1LS-1215DH30-NZ	10.8-13.2	±15	±33 / ±3	3000	103   15	100	81
AM1LS-1224DH30-NZ	10.8-13.2	±24	±21 / ±2	3000	103   15	100	81
AM1LS-1515DH30-NZ	13.5-16.5	±15	±33 / ±3	3000	83   12	100	81
AM1LS-2405DH30-NZ‡	21.6-26.4	±5	±100 / ±10	3000	82   10	100	82
AM1LS-2409DH30-NZ‡	21.6-26.4	±9	±56 / ±6	3000	52   7	100	82
AM1LS-2412DH30-NZ‡	21.6-26.4	±12	±42 / ±5	3000	52   7	100	82
AM1LS-2415DH30-NZ‡	21.6-26.4	±15	±33 / ±3	3000	51   7	100	82
AM1LS-2424DH30-NZ‡	21.6-26.4	±24	±21 / ±2	3000	51   7	100	82

‡ With Momentary short circuit protection of 1 second

NOTE 1: Add suffix "TR" to a part number when ordering in tape and reel package

NOTE: All specifications in this datasheet are measured at an ambient temperature of 25°C, humidity<75%, nominal input voltage and at rated output load unless otherwise specified.

## Input Specifications

Parameters	Nominal	Typical	Maximum	Units
Voltage Range	3	2.97-3.63		VDC
	5	4.5-5.5		
	12	10.8-13.2		
	15	13.5-16.5		

	24	21.6-26.4		
Absolute Max Input Voltage (1 sec max)	3 Vin 5 Vin 12 Vin 15 Vin 24 Vin		5 9 18 21 30	VDC
Filter	Capacitor			

### Isolation Specifications

Parameters	Conditions	Typical	Maximum	Units
Tested I/O Voltage	60 sec	1500 models 3000 Models		VDC
Resistance	500VDC	>1000		MOhm
Capacitance		20		pF

### Output Specifications

Parameters	Conditions	Typical	Maximum	Units
Voltage Accuracy	100% load (see tolerance chart)	±2.5		%
Short Circuit Protection	Continuous, unless marked with †			
Short Circuit Restart	Auto-Recovery			
Line Voltage Regulation	For ±1% of Vin 3.3V models only	±1.2 ±1.5		% of Vin
Load Voltage Regulation (10% - 100% Load)	3.3V	18		%
	5 V	12		
	6 V	10		
	9 V	8		
	12 V	7		
	15 V	6		
24 V	5			
Temperature Coefficient	100% load	±0.03		%/°C
Ripple & Noise		60		mV p-p

### General Specifications


Parameters	Conditions	Typical	Maximum	Units
Switching frequency	100% load	100	300	KHz
Operating temperature	With derating above +100		-40 to +105	°C
Storage temperature		-55 to +125		°C
Cooling	Free air convection			
Storage Humidity	Non Condensing		95	% RH
Case material	Epoxy resin (UL94-V0)			
Weight		Single 1.5 Dual 1.8		g
Dimensions (L x W x H)	Single Output	0.50 x 0.44 x 0.28 inches	12.70 x 11.20 x 7.25mm	
	Dual Output	0.60 x 0.44 x 0.28 inches	15.24 x 11.20 x 7.25 mm	
MTBF	>3500Khrs (MIL-HDBK -217F, Ground Benign, t=+25°C)hours			
Maximum soldering temperature	1.5mm from case for 10 sec		300	°C
Maximum case temperature			130	°C

### Safety Specifications


Parameters		
Agency approvals	UL 60950-1	cULus (without 15V input and without 3.3V input of dual output models)
Standards	EMI - Conducted and radiated emission	EN55022, class B (with the recommended EMC circuit)
	Electrostatic Discharge Immunity	IEC 61000-4-2, Contact +/-8kV, Criteria B

## Pin Out Specifications and Dimensions



Pin	Single
1	- V Input
2	+ V Input
3	No Pin
4	-V Output
5	+V Output
6	No Pin
7	No Pin
8	N.C.

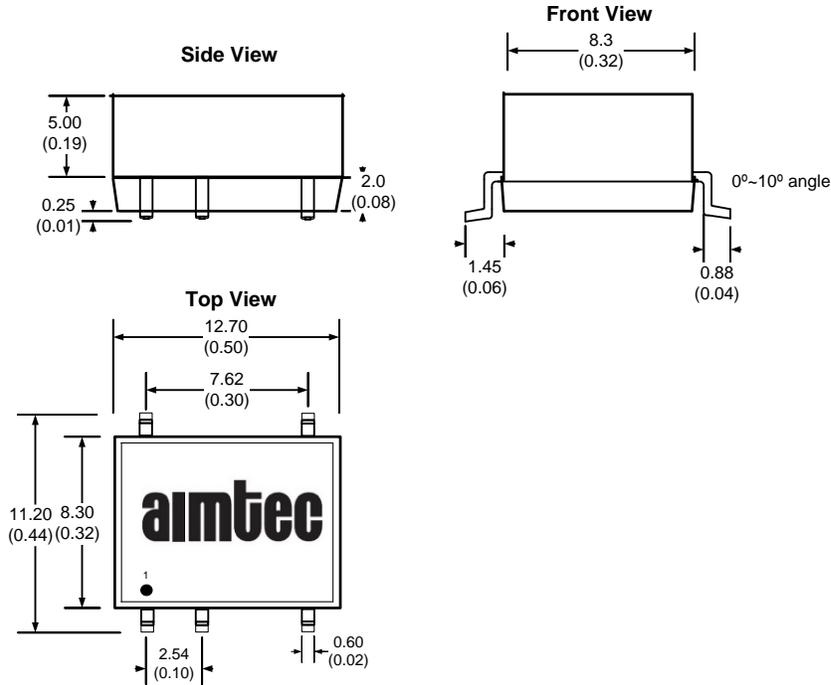

Pin	Dual Output Models
1	-V Input
2	+V Input
3	No Pin
4	Common
5	-V Output
6	No Pin
7	+V Output
8	No Pin
9	No Pin
10	N.C.

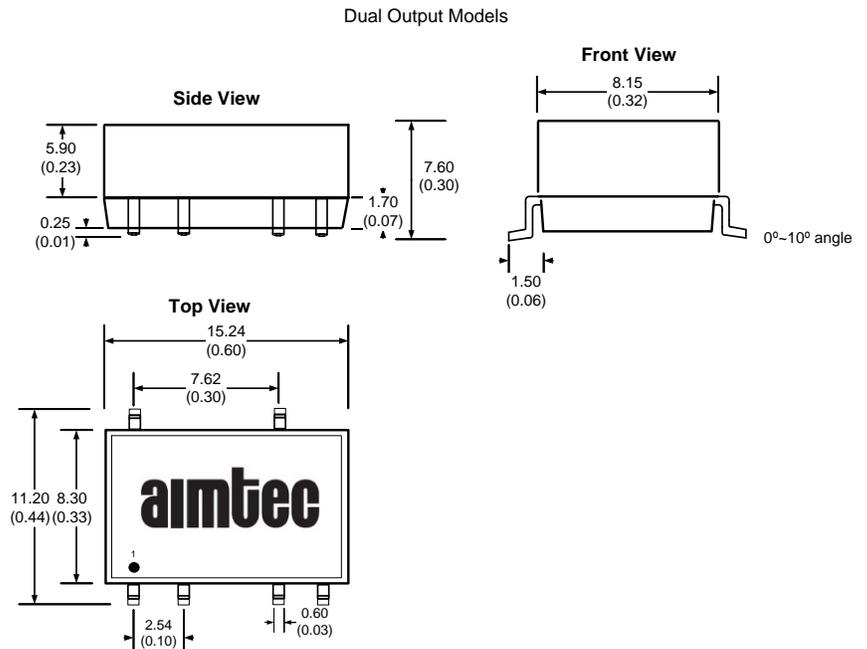


### EMI Recommended Circuit (Class B) Input Reflected Ripple Current Test Circuit

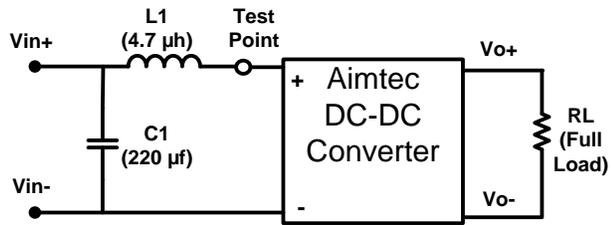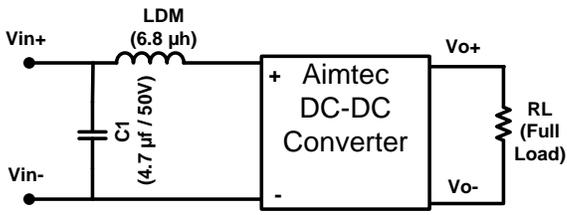


\* Tested at full load, and nominal input

### Load Accuracy Tolerance Graph

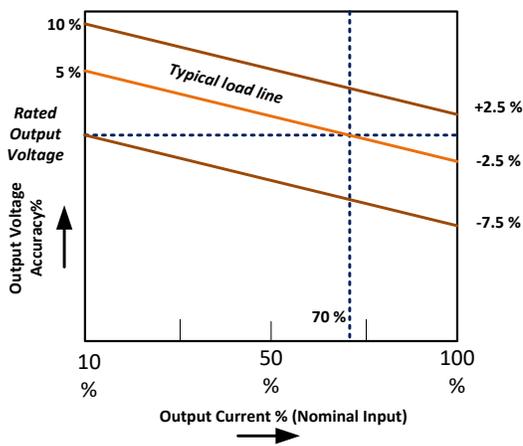

### Derating

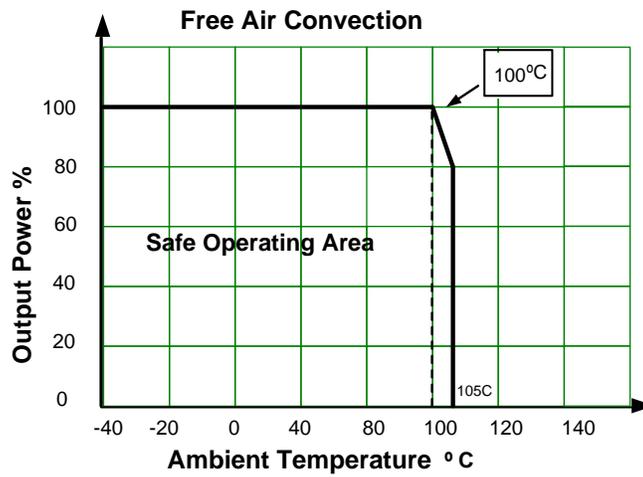


### Recommended Circuits




#### Capacitor selection Table

Vin	C1	Single VDC	C2	Dual VDC	C2/C3
3.3	4.7 μF	3.3 V	10 μF	±3.3	4.7 μF
5	4.7 μF	5V	10μF	±5V	4.7 μF
		9 V	4.7 μF	±9V	2.2 μF
12	2.2μF	12 V	2.2μF	±12 V	1 μF
15	2.2μF	15 V	1μF	±15 V	0.47 μF
24	1μF	24V	0.47 μF	±24 V	0.47 μF

- 1) Ensure output load of Min 10%, or specifications may not be met
- 2) Under normal operation, there is no protection for overload condition
- 3) Converter may exhibit start up delay if capacitive load exceeds recommended
- 4) Ceramic or electrolytic type capacitors are recommended, tantalum type may damage converter
- 5) Parallel connections, or hot swapping is not recommended

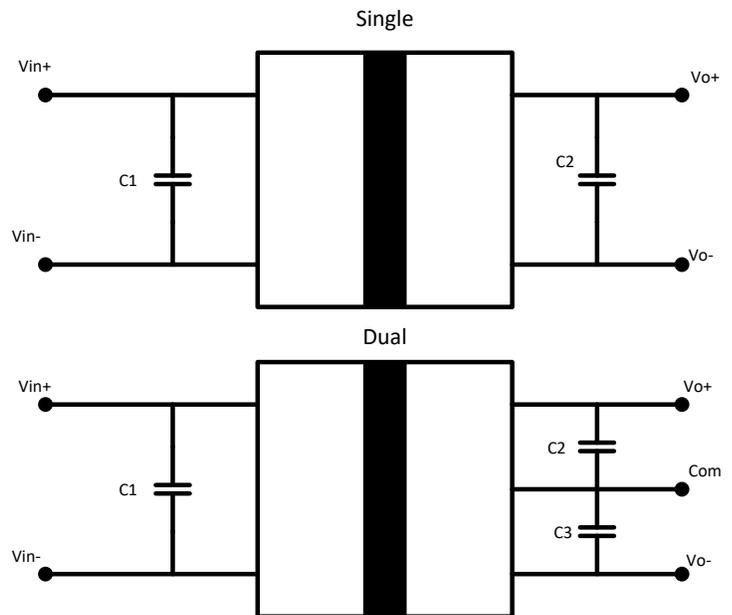

**Typical Efficiency vs. Loading**

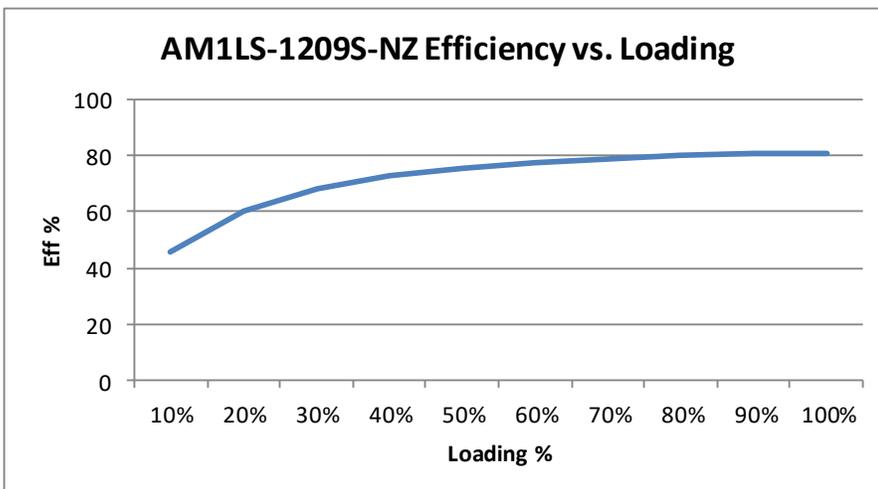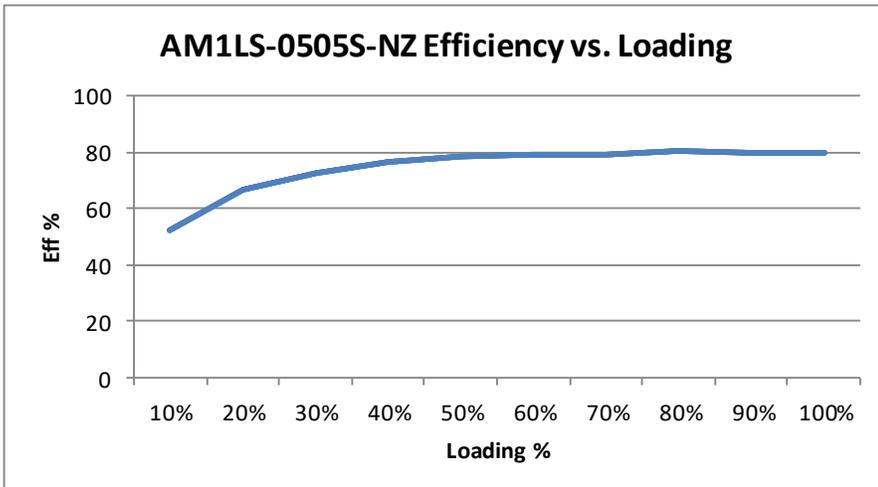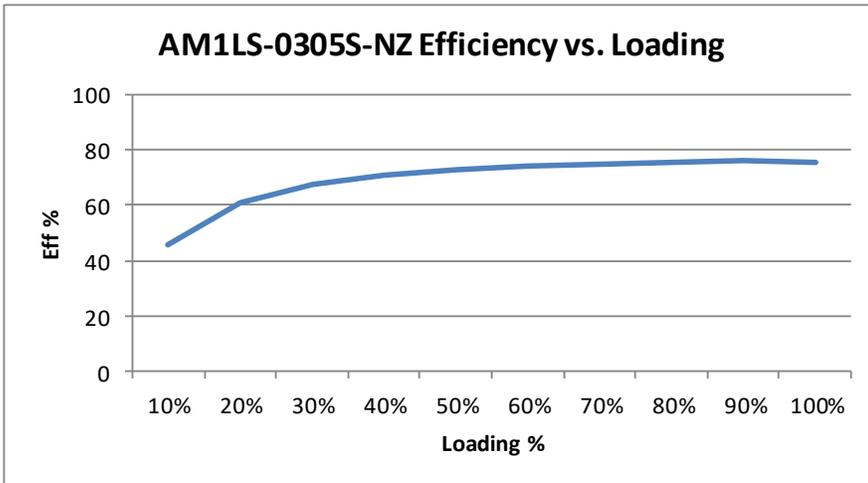

**NOTE:** **1.** Datasheets are updated as needed and as such, specifications are subject to change without notice. Once printed or downloaded, datasheets are no longer controlled by Aimtec; refer to [www.aimtec.com](http://www.aimtec.com) for the most current product specifications. **2.** Product labels shown, including safety agency certifications on labels, may vary based on the date manufactured. **3.** Mechanical drawings and specifications are for reference only. **4.** All specifications are measured at an ambient temperature of 25°C, humidity<75%, nominal input voltage and at rated output load unless otherwise specified. **5.** Aimtec may not have conducted destructive testing or chemical analysis on all internal components and chemicals at the time of publishing this document. CAS numbers and other limited information are considered proprietary and may not be available for release. **6.** This product is not designed for use in critical life support systems, equipment used in hazardous environments, nuclear control systems or other such applications which necessitate specific safety and regulatory standards other the ones listed in this datasheet. **7.** Warranty is in accordance with Aimtec's standard Terms of Sale available at [www.aimtec.com](http://www.aimtec.com).