


Type No. 1N198

T-01-07

GOLD BONDED GERMANIUM DIODE

6 Lake Street
PO Box 1436
Lawrence, MA 01841

Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377

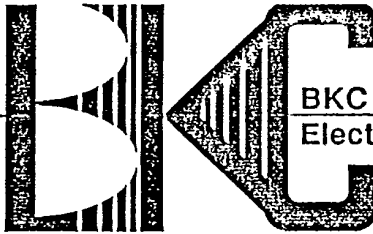

BKC International
Electronics Inc.

FEATURES

- Low forward voltage drop—low power consumption
- Thirty years of proven reliability—one million hours mean time between failures (MTBF)
- Very low noise level
- Metallurgically bonded


ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	80 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	80		V	25 °C
Reverse Current	I _r	10 V		10	μA	25 °C
Reverse Current	I _r	50 V		250	μA	75 °C
Forward Voltage	V _f	4 mA		1	V	25 °C

MECHANICAL

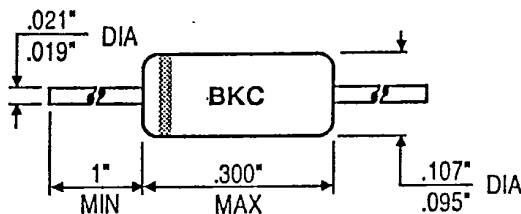

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.