

MM54C200/MM74C200 256-Bit TRI-STATE® Random Access Read/Write Memory

General Description

The MM54C200/MM74C200 is a 256-bit random access read/write memory. Inputs consist of eight address lines and three chip enables. The eight binary address inputs are decoded internally to select each of the 256 locations. The internal address register, latches, and address information are on the positive to negative edge of $\overline{CE}_3$. The TRI-STATE data output line, working in conjunction with $\overline{CE}_1$ or $\overline{CE}_2$ inputs, provides for easy memory expansion.

Address Operation: Address inputs must be stable t_{SA} prior to the positive to negative transition of $\overline{CE}_3$. It is therefore unnecessary to hold address information stable for more than t_{HA} after the memory is enabled (positive to negative transition).

Note: The timing is different from the DM74200 in that a positive to negative transition of the $\overline{CE}_3$ must occur for the memory to be selected.

Read Operation: The data is read out by selecting the proper address and bringing $\overline{CE}_3$ low and $\overline{WE}$ high.

Holding either $\overline{CE}_1$, $\overline{CE}_2$, or $\overline{CE}_3$ at a high level forces the output into TRI-STATE. When used in bus-organized systems, $\overline{CE}_1$, or $\overline{CE}_2$, a TRI-STATE control provides for fast access times by not totally disabling the chip.


Write Operation: Data is written into the memory with $\overline{CE}_3$ low and $\overline{WE}$ low. The state of $\overline{CE}_1$ or $\overline{CE}_2$ has no effect on the write cycle. The output assumes TRI-STATE with $\overline{WE}$ low.

Features

- Wide supply voltage range
- Guaranteed noise margin
- High noise immunity
- TTL compatibility
- Low power
- Internal address register


3V to 15V
1V
0.45 V_{CC} (typ.)
Fan out of 1
driving standard TTL
500 nW (typ.)

Logic and Connection Diagrams

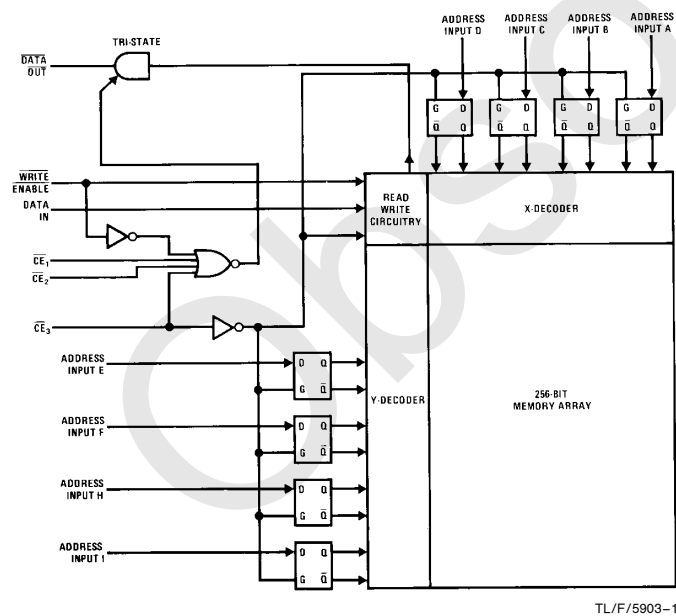

TL/F/5903-1

Dual-In-Line Package



TL/F/5903-2

Top View

Order Number MM54C200 or
MM74C200

TRI-STATE® is a registered trademark of National Semiconductor Corporation.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Voltage at Any Pin	−0.3V to $V_{CC} + 0.3V$
Operating Temperature Range (T_A)	−55°C to +125°C MM54C200 −40°C to +85°C MM74C200
Storage Temperature Range (T_S)	−65°C to +150°C

Power Dissipation (P_D)

Dual-In-Line	700 mW
Small Outline	500 mW
Operating V_{CC} Range	3V to 15V
Absolute Maximum V_{CC}	18V
Lead Temperature (T_L) (Soldering, 10 seconds)	260°C

DC Electrical Characteristics Min/Max limits apply across temperature range unless otherwise noted

Symbol	Parameter	Conditions	Min	Typ	Max	Units
CMOS TO CMOS						
$V_{IN(1)}$	Logical "1" Input Voltage	$V_{CC} = 5V$ $V_{CC} = 10V$	3.5 8			V V
$V_{IN(0)}$	Logical "0" Input Voltage	$V_{CC} = 5V$ $V_{CC} = 10V$			1.5 2	V V
$V_{OUT(1)}$	Logical "1" Output Voltage	$V_{CC}=5V, I_O = -10 \mu A$ $V_{CC}=10V, I_O = -10 \mu A$	4.5 9			V V
$V_{OUT(0)}$	Logical "0" Output Voltage	$V_{CC}=5V, I_O = +10 \mu A$ $V_{CC}=10V, I_O = +10 \mu A$			0.5 1	V V
$I_{IN(1)}$	Logical "1" Input Current	$V_{CC} = 15V, V_{IN} = 15V$		0.005	1	μA
$I_{IN(0)}$	Logical "0" Input Current	$V_{CC} = 15V, V_{IN} = 0V$	−1	−0.005		μA
I_{CC}	Supply Current	$V_{CC} = 15V$		0.1	600	μA
CMOS/TTL INTERFACE						
$V_{IN(1)}$	Logical "1" Input Voltage	54C $V_{CC} = 4.5V$ 74C $V_{CC} = 4.75V$	$V_{CC} - 1.5$ $V_{CC} - 1.5$			V V
$V_{IN(0)}$	Logical "0" Input Voltage	54C $V_{CC} = 4.5V$ 74C $V_{CC} = 4.75V$			0.8 0.8	V V
$V_{OUT(1)}$	Logical "1" Output Voltage	54C $V_{CC} = 4.5V, I_O = -1.6 mA$ 74C $V_{CC} = 4.75V, I_O = -1.6 mA$	2.4 2.4			V V
$V_{OUT(0)}$	Logical "0" Output Voltage	54C $V_{CC} = 4.5V, I_O = 1.6 mA$ 74C $V_{CC} = 4.75V, I_O = 1.6 mA$			0.4	V
OUTPUT DRIVE (See 54C/74C Family Characteristics Data Sheet) (Short Circuit Current)						
I_{SOURCE}	Output Source Current (P-Channel)	$V_{CC} = 5V, V_{OUT} = 0V$ $T_A = 25^\circ C$	−4 −1.8	−6		mA mA
I_{SOURCE}	Output Source Current (P-Channel)	$V_{CC} = 10V, V_{OUT} = 0V$ $T_A = 25^\circ C$	−16 −1.5	−25		mA mA
I_{SINK}	Output Sink Current (N-Channel)	$V_{CC} = 5V, V_{OUT} = V_{CC}$ $T_A = 25^\circ C$	5	8		mA
I_{SINK}	Output Sink Current (N-Channel)	$V_{CC} = 10V, V_{OUT} = V_{CC}$ $T_A = 25^\circ C$	20	30		mA

Note 1: "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. Except for "Operating Temperature Range" they are not meant to imply that the devices should be operated at these limits. The table of "Electrical Characteristics" provides conditions for actual device operation.

AC Electrical Characteristics* $T_A = 25^\circ\text{C}$, $C_L = 50\text{ pF}$, unless otherwise specified

Symbol	Parameter	Conditions	Min	Typ	Max	Units
t_{ACC}	Access Time from Address	$V_{\text{CC}} = 5\text{V}$ $V_{\text{CC}} = 10\text{V}$		450 200	900 400	ns ns
t_{pd}	Propagation Delay from $\overline{\text{CE}}_3$	$V_{\text{CC}} = 5\text{V}$ $V_{\text{CC}} = 10\text{V}$		360 120	700 300	ns ns
t_{pCE1}	Propagation Delay from $\overline{\text{CE}}_1$ or $\overline{\text{CE}}_2$	$V_{\text{CC}} = 5\text{V}$ $V_{\text{CC}} = 10\text{V}$		250 85	700 200	ns ns
t_{SA}	Address Setup Time	$V_{\text{CC}} = 5\text{V}$ $V_{\text{CC}} = 10\text{V}$	200 100	80 30		ns ns
t_{HA}	Address Hold Time	$V_{\text{CC}} = 5\text{V}$ $V_{\text{CC}} = 10\text{V}$	50 25	15 5.0		ns ns
t_{WE}	Write Enable Pulse Width	$V_{\text{CC}} = 5\text{V}$ $V_{\text{CC}} = 10\text{V}$	300 150	160 70		ns ns
t_{CE}	$\overline{\text{CE}}_3$ Pulse Widths	$V_{\text{CC}} = 5\text{V}$ $V_{\text{CC}} = 10\text{V}$	400 160	200 80		ns ns
C_{IN}	Input Capacity	Any Input (Note 2)		5.0		pF
C_{OUT}	Output Capacity in TRI-STATE	(Note 2)		9.0		pF
C_{PD}	Power Dissipation Capacity	(Note 3)		400		pF

AC Electrical Characteristics* $C_L = 50\text{ pF}$

Symbol	Parameter	Conditions	MM54C200 $T_A = -55^\circ\text{C to } +125^\circ\text{C}$		MM74C200 $T_A = -40^\circ\text{C to } +85^\circ\text{C}$		Units
			Min	Max	Min	Max	
t_{ACC}	Access Time from Address	$V_{\text{CC}} = 5\text{V}$ $V_{\text{CC}} = 10\text{V}$		1200 520		1100 480	ns ns
t_{pd}	Propagation Delay from $\overline{\text{CE}}_3$	$V_{\text{CC}} = 5\text{V}$ $V_{\text{CC}} = 10\text{V}$		950 400		850 360	ns ns
t_{pdCE1}	Propagation Delay from $\overline{\text{CE}}_1$ or $\overline{\text{CE}}_2$	$V_{\text{CC}} = 5\text{V}$ $V_{\text{CC}} = 10\text{V}$		650 300		600 275	ns ns
t_{SA}	Address Setup Time	$V_{\text{CC}} = 5\text{V}$ $V_{\text{CC}} = 10\text{V}$	250 120		250 120		ns ns
t_{HA}	Address Hold Time	$V_{\text{CC}} = 5\text{V}$ $V_{\text{CC}} = 10\text{V}$	100 50		100 50		ns ns
t_{WE}	Write Enable Pulse Width	$V_{\text{CC}} = 5\text{V}$ $V_{\text{CC}} = 10\text{V}$	450 225		400 200		ns ns
t_{CE}	Disable Pulse Width	$V_{\text{CC}} = 5\text{V}$ $V_{\text{CC}} = 10\text{V}$	500 250		460 230		ns ns
t_{HD}	Data Hold Time	$V_{\text{CC}} = 5\text{V}$ $V_{\text{CC}} = 10\text{V}$	50 25		50 25		ns ns



*AC Parameters are guaranteed by DC correlated testing.

Note 1: "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. Except for "Operating Temperature Range" they are not meant to imply that the devices should be operated at these limits. The table of "Electrical Characteristics" provides conditions for actual device operation.

Note 2: Capacitance is guaranteed by periodic testing.

Note 3: C_{PD} determines the no load AC power consumption of any CMOS device. For complete explanation see 54C/74C Family Characteristics application note, AN-90.


Switching Time Waveforms

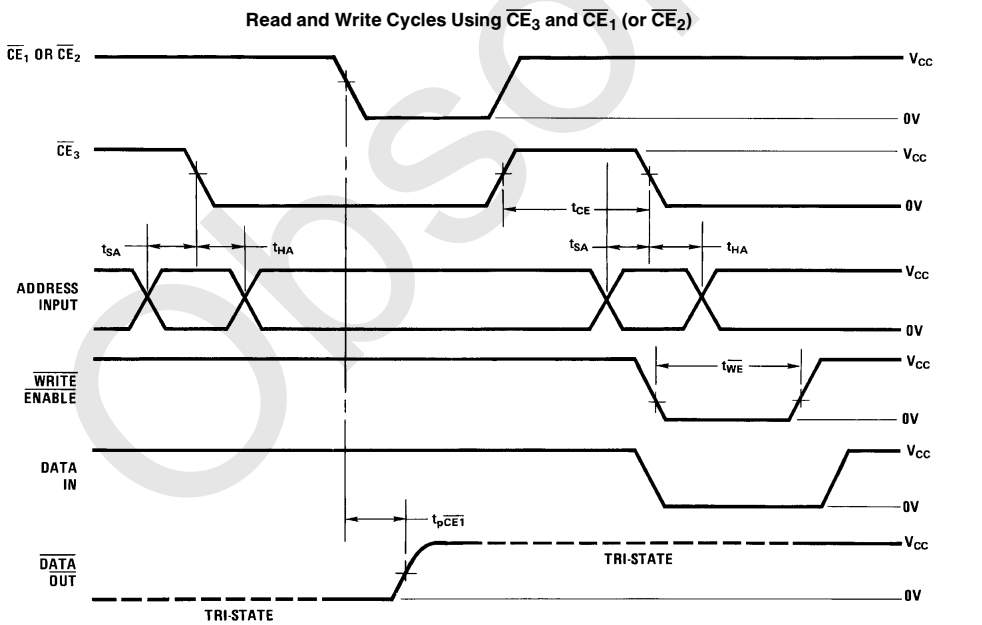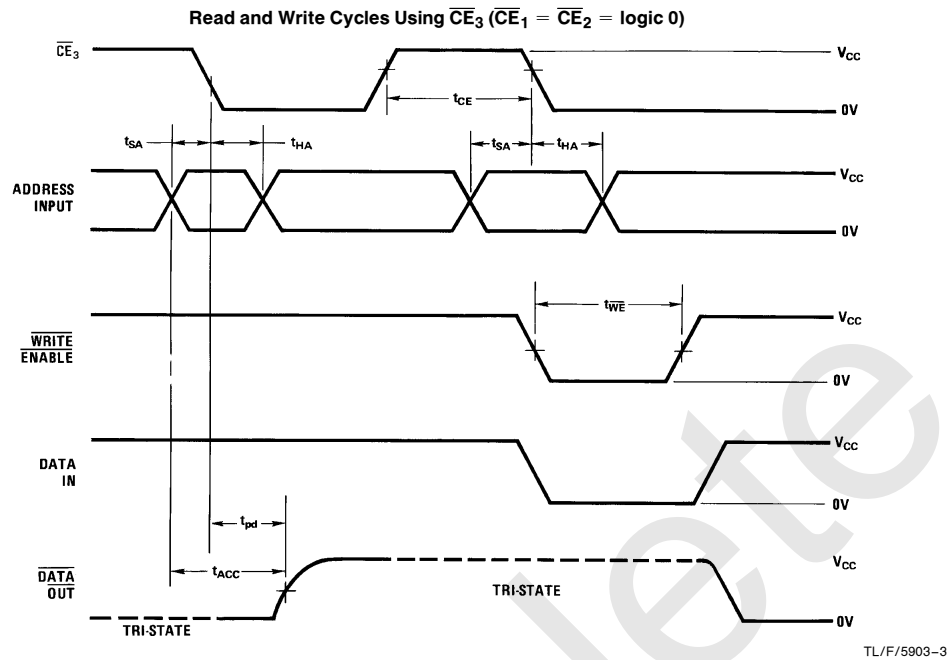

Note: Used for fast access time in bused systems.

[illegible]

Ceramic Dual-In-Line Package (J)
Order Number MM54C200J or MM74C200J
NS Package Number J16A

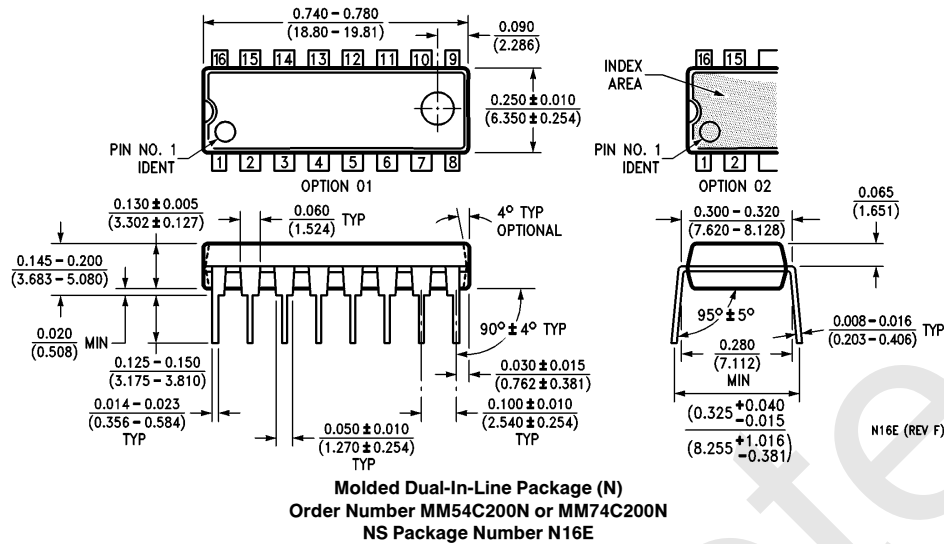Physical Dimensions inches (millimeters) (Continued)**LIFE SUPPORT POLICY**

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



National Semiconductor Corporation
 1111 West Bardin Road
 Arlington, TX 76017
 Tel: (800) 272-9959
 Fax: (800) 737-7018

National Semiconductor Europe
 Fax: (+49) 0-180-530 85 86
 Email: cnjwge@tevm2.nsc.com
 Deutsch Tel: (+49) 0-180-530 85 85
 English Tel: (+49) 0-180-532 78 32
 Français Tel: (+49) 0-180-532 93 58
 Italiano Tel: (+49) 0-180-534 16 80

National Semiconductor Hong Kong Ltd.
 13th Floor, Straight Block,
 Ocean Centre, 5 Canton Rd.
 Tsimshatsui, Kowloon
 Hong Kong
 Tel: (852) 2737-1600
 Fax: (852) 2736-9960

National Semiconductor Japan Ltd.
 Tel: 81-043-299-2309
 Fax: 81-043-299-2408

National does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and National reserves the right at any time without notice to change said circuitry and specifications.