


Round Type

Dynamic Receiver

KDRG09016A-4


Dimension

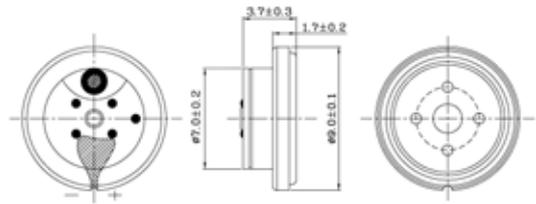

Tol: ± 0.5 Unit: mm

Rated Power (mW)	5
Max. Input Power (mW)	50
Sound Pressure Level (dB)	93 ± 3dB@1.0KHz 126mV with IEC318 Coupler
Impedance (Ω)	16 ± 15%@1.5KHz
Frequency Range (Hz)	100 ~ 10K
Operating Temperature (°C)	-20 ~ +55
Dimension (mm)	Φ9.0xH3.7
Material	Metal

Characteristic

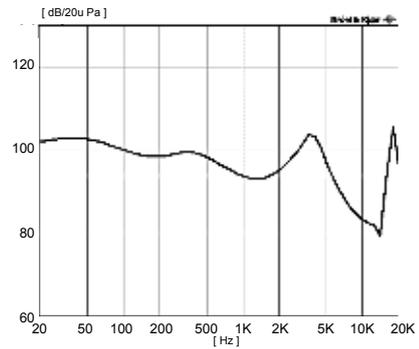


Round Type

Dynamic Receiver

KDRG14818A-2

Dimension

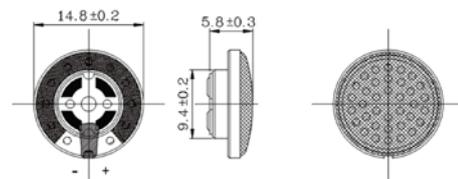

Tol: ± 0.5 Unit: mm

Rated Power (mW)	1
Max. Input Power (mW)	3
Sound Pressure Level (dB)	117 ± 3@1.0KHz 130mV rms
Impedance (Ω)	18 ± 15%@1.0KHz
Frequency Range (Hz)	20 ~ 20K
Operating Temperature (°C)	-20 ~ +55
Storage Temperature (°C)	-20 ~ +55
Dimension (mm)	Φ14.8xH5.8
Material	Metal

Characteristic

