


Round Type

Dynamic Receiver

KDRG18032


Dimension

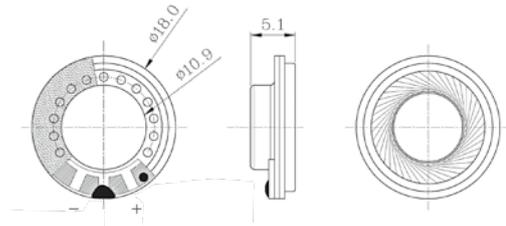

Tol: ± 0.5 Unit: mm

Rated Power (mW)	12
Max. Input Power (mW)	15
Sound Pressure Level (dB)	119 ± 3@1.0KHz 179mV with IEC318 Coupler
Impedance (Ω)	32 ± 15%@1.5KHz
Frequency Range (Hz)	100 ~ 10K
Operating Temperature (°C)	-20 ~ +55
Dimension (mm)	Φ18.0xH5.1
Material	Metal

Characteristic

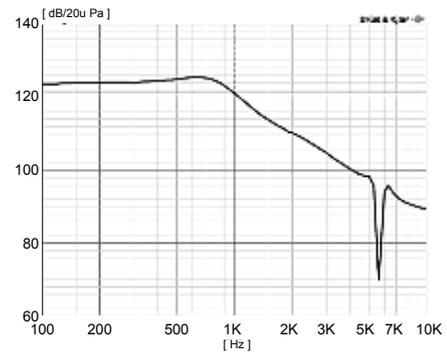


Round Type

Dynamic Receiver

KDRG30032A

Dimension

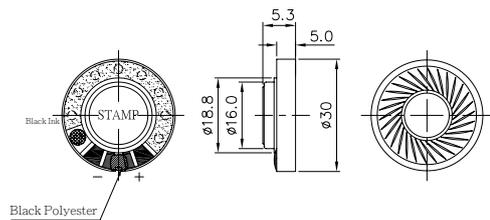

Tol: ± 0.5 Unit: mm

Rated Power (mW)	5
Max. Input Power (mW)	10
Sound Pressure Level (dB)	116 ± 3@1.0KHz 179mV with IEC318 Coupler
Impedance (Ω)	32 ± 15%@1.0KHz, 1.0V
Frequency Range (Hz)	200 ~ 20K
Operating Temperature (°C)	-20 ~ +55
Storage Temperature (°C)	-20 ~ +55
Dimension (mm)	Φ30.0xH5.3
Material	ABS (Black)

Characteristic

