

### General Description

These N-Channel enhancement mode power field effect transistors are planar stripe, DMOS technology. This advanced technology has been especially tailored to minimize on-state resistance, provide superior switching performance, and withstand high energy pulse in the avalanche and commutation mode. These devices are well suited for high efficiency switch mode power supply

|       |       |    |
|-------|-------|----|
| BVDSS | RDSON | ID |
| 500V  | 1.8Ω  | 5A |


### Features

- Improved dv/dt capability
- Fast switching
- 100% EAS Guaranteed
- Green Device Available

### Applications

- High efficient switched mode power supplies
- TV Power
- Adapter/charger
- Server Power
- PV Inverter / UPS

### TO252 Pin Configuration

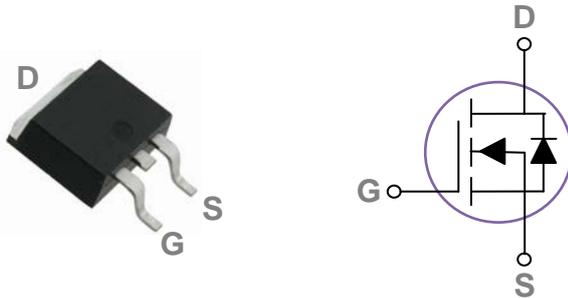

### Absolute Maximum Ratings $T_c=25^{\circ}\text{C}$ unless otherwise noted

| Symbol    | Parameter  | Rating     | Units                 |
|-----------|--|------------|-----------------------|
| $V_{DS}$  | Drain-Source Voltage                                     | 500        | V                     |
| $V_{GS}$  | Gate-Source Voltage                                      | $\pm 30$   | V                     |
| $I_D$     | Drain Current – Continuous ( $T_c=25^{\circ}\text{C}$ )  | 5          | A                     |
|           | Drain Current – Continuous ( $T_c=100^{\circ}\text{C}$ ) | 3.2        | A                     |
| $I_{DM}$  | Drain Current – Pulsed <sup>1</sup>                      | 20         | A                     |
| EAS       | Single Pulse Avalanche Energy <sup>2</sup>               | 11         | mJ                    |
| IAS       | Single Pulse Avalanche Current <sup>2</sup>              | 4.6        | A                     |
| $P_D$     | Power Dissipation ( $T_c=25^{\circ}\text{C}$ )           | 52         | W                     |
|           | Power Dissipation – Derate above $25^{\circ}\text{C}$    | 0.42       | W/ $^{\circ}\text{C}$ |
| $T_{STG}$ | Storage Temperature Range                                | -55 to 150 | $^{\circ}\text{C}$    |
| $T_J$     | Operating Junction Temperature Range                     | -55 to 150 | $^{\circ}\text{C}$    |

### Thermal Characteristics

| Symbol          | Parameter                              | Typ. | Max. | Unit                        |
|-----------------|--|------|------|-----------------------------|
| $R_{\theta JA}$ | Thermal Resistance Junction to ambient | ---  | 62   | $^{\circ}\text{C}/\text{W}$ |
| $R_{\theta JC}$ | Thermal Resistance Junction to Case    | ---  | 2.4  | $^{\circ}\text{C}/\text{W}$ |

**Electrical Characteristics ( $T_J=25^\circ\text{C}$ , unless otherwise noted)**
**Off Characteristics**

| Symbol                       | Parameter                          | Conditions   | Min. | Typ. | Max.      | Unit               |
|------------------------------|------------------------------------|--|------|------|-----------|--------------------|
| $BV_{DSS}$                   | Drain-Source Breakdown Voltage     | $V_{GS}=0V, I_D=250\mu A$                          | 500  | ---  | ---       | V                  |
| $\Delta BV_{DSS}/\Delta T_J$ | $BV_{DSS}$ Temperature Coefficient | Reference to $25^\circ\text{C}$ , $I_D=1\text{mA}$ | ---  | 0.5  | ---       | $V/^\circ\text{C}$ |
| $I_{DSS}$                    | Drain-Source Leakage Current       | $V_{DS}=500V, V_{GS}=0V, T_J=25^\circ\text{C}$     | ---  | ---  | 1         | $\mu A$            |
|                              |                                    | $V_{DS}=400V, V_{GS}=0V, T_J=125^\circ\text{C}$    | ---  | ---  | 10        | $\mu A$            |
| $I_{GSS}$                    | Gate-Source Leakage Current        | $V_{GS}=\pm 30V, V_{DS}=0V$                        | ---  | ---  | $\pm 100$ | nA                 |

**On Characteristics**

|                     |                                      |                               |     |     |     |                            |
|---------------------|--------------------------------------|-------------------------------|-----|-----|-----|----------------------------|
| $R_{DS(ON)}$        | Static Drain-Source On-Resistance    | $V_{GS}=10V, I_D=2A$          | --- | 1.4 | 1.8 | $\Omega$                   |
| $V_{GS(th)}$        | Gate Threshold Voltage               | $V_{GS}=V_{DS}, I_D=250\mu A$ | 3   | 4   | 5   | V                          |
| $\Delta V_{GS(th)}$ | $V_{GS(th)}$ Temperature Coefficient |                               | --- | -8  | --- | $\text{mV}/^\circ\text{C}$ |
| $g_{fs}$            | Forward Transconductance             | $V_{DS}=10V, I_D=1A$          | --- | 3.6 | --- | S                          |

**Dynamic and switching Characteristics**

|              |                                    |   |     |      |      |          |
|--------------|------------------------------------|---|-----|------|------|----------|
| $Q_g$        | Total Gate Charge <sup>3,4</sup>   | $V_{DS}=400V, V_{GS}=10V, I_D=1A$                   | --- | 16.2 | 25   | nC       |
| $Q_{gs}$     | Gate-Source Charge <sup>3,4</sup>  |   | --- | 4.6  | 7    |          |
| $Q_{gd}$     | Gate-Drain Charge <sup>3,4</sup>   |   | --- | 4.9  | 10   |          |
| $T_{d(on)}$  | Turn-On Delay Time <sup>3,4</sup>  | $V_{DD}=300V, V_{GS}=10V, R_G=25\Omega$<br>$I_D=1A$ | --- | 22   | 42   | ns       |
| $T_r$        | Rise Time <sup>3,4</sup>           |   | --- | 14   | 27   |          |
| $T_{d(off)}$ | Turn-Off Delay Time <sup>3,4</sup> |   | --- | 32   | 61   |          |
| $T_f$        | Fall Time <sup>3,4</sup>           |   | --- | 26   | 49   |          |
| $C_{iss}$    | Input Capacitance                  | $V_{DS}=25V, V_{GS}=0V, F=1\text{MHz}$              | --- | 740  | 1080 | pF       |
| $C_{oss}$    | Output Capacitance                 |   | --- | 48   | 70   |          |
| $C_{rss}$    | Reverse Transfer Capacitance       |   | --- | 4.4  | 10   |          |
| $R_g$        | Gate resistance                    | $V_{GS}=0V, V_{DS}=0V, F=1\text{MHz}$               | --- | 2.4  | 4.8  | $\Omega$ |

**Drain-Source Diode Characteristics and Maximum Ratings**

| Symbol   | Parameter                            | Conditions                                | Min. | Typ. | Max. | Unit    |
|----------|--------------------------------------|---|------|------|------|---------|
| $I_S$    | Continuous Source Current            | $V_G=V_D=0V$ , Force Current              | ---  | ---  | 5    | A       |
| $I_{SM}$ | Pulsed Source Current                |   | ---  | ---  | 20   | A       |
| $V_{SD}$ | Diode Forward Voltage                | $V_{GS}=0V, I_S=1A, T_J=25^\circ\text{C}$ | ---  | ---  | 1    | V       |
| $t_{rr}$ | Reverse Recovery Time <sup>3</sup>   | $V_{GS}=0V, I_S=1A, dI/dt=100A/\mu s$     | ---  | ---  | ---  | ns      |
| $Q_{rr}$ | Reverse Recovery Charge <sup>3</sup> | $T_J=25^\circ\text{C}$                    | ---  | ---  | ---  | $\mu C$ |

**Note :**

1. Repetitive Rating : Pulsed width limited by maximum junction temperature.
2.  $V_{DD}=50V, V_{GS}=10V, L=1\text{mH}, I_{AS}=4.6A, R_G=25\Omega$ , Starting  $T_J=25^\circ\text{C}$ .
3. The data tested by pulsed, pulse width  $\leq 300\mu s$ , duty cycle  $\leq 2\%$ .
4. Essentially independent of operating temperature.

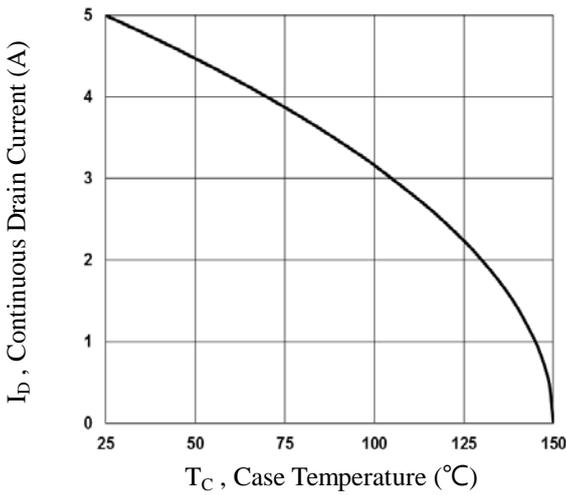


Fig.1 Continuous Drain Current vs.  $T_c$

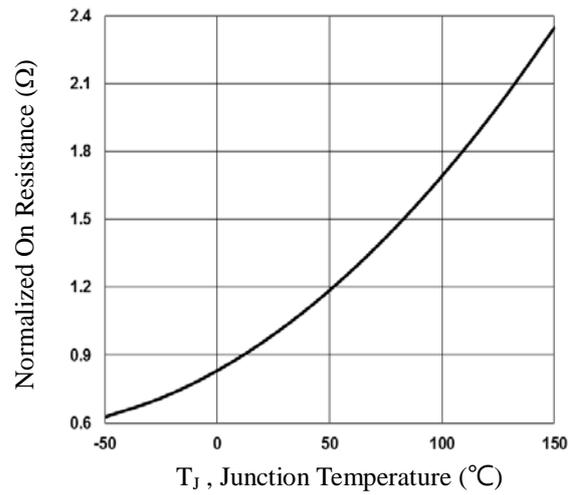


Fig.2 Normalized  $R_{DS(on)}$  vs.  $T_j$

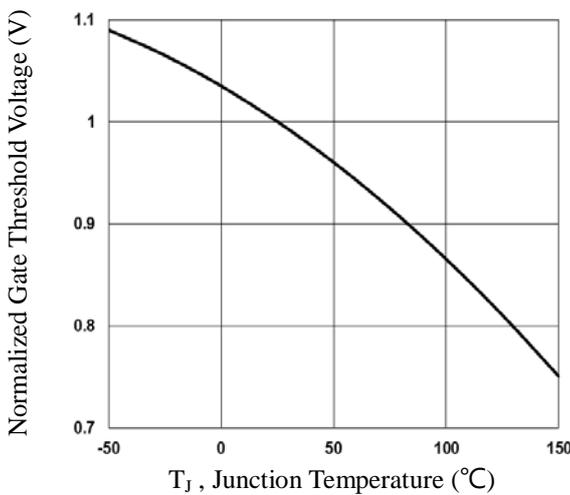


Fig.3 Normalized  $V_{th}$  vs.  $T_j$

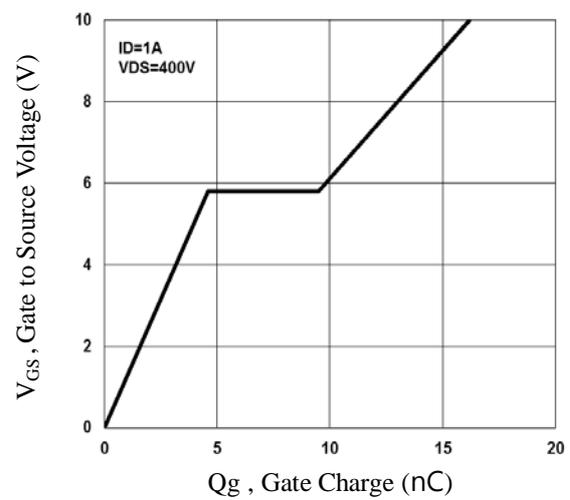


Fig.4 Gate Charge Waveform

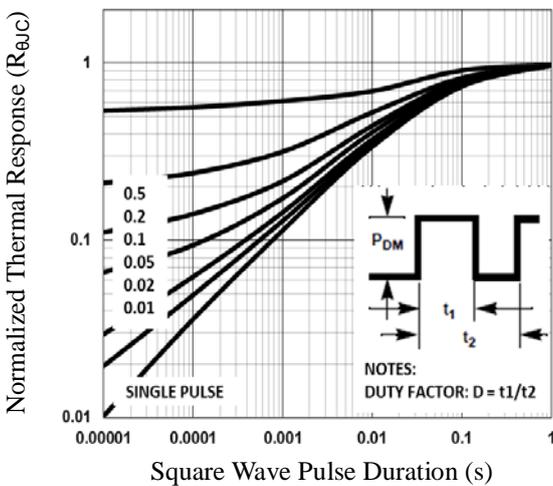


Fig.5 Normalized Transient Impedance

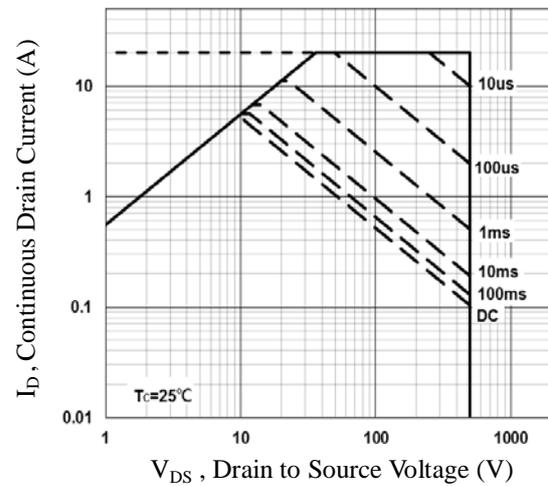


Fig.6 Maximum Safe Operation Area

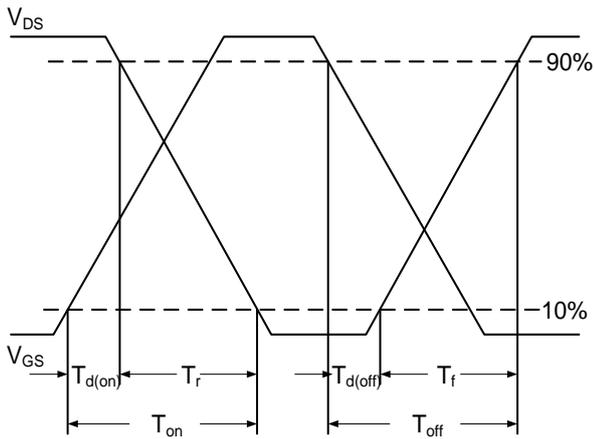


Fig.7 Switching Time Waveform


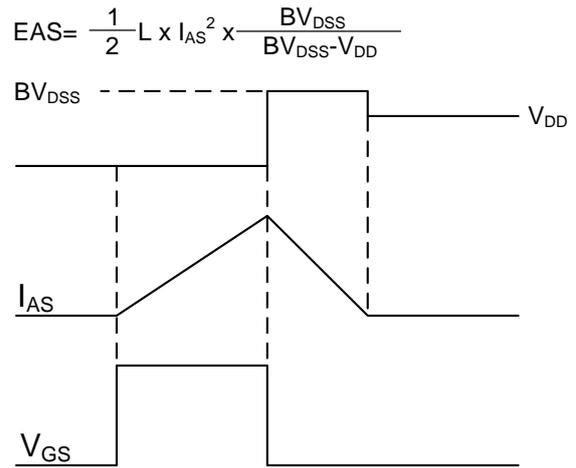


Fig.8 EAS Waveform

## TO252 PACKAGE INFORMATION

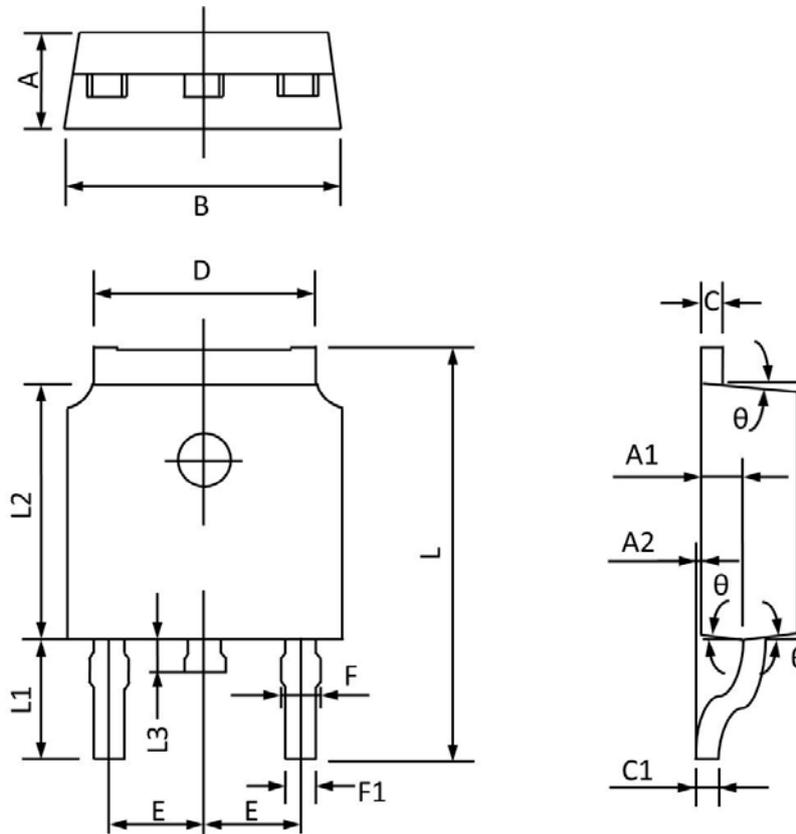

| Symbol    | Dimensions In Millimeters |              | Dimensions In Inches |              |
|-----------|---------------------------|--------------|----------------------|--------------|
|           | Min                       | Max          | Min                  | Max          |
| <b>A</b>  | <b>2.20</b>               | <b>2.40</b>  | <b>0.087</b>         | <b>0.094</b> |
| <b>A1</b> | <b>0.91</b>               | <b>1.11</b>  | <b>0.036</b>         | <b>0.044</b> |
| <b>A2</b> | <b>0.00</b>               | <b>0.15</b>  | <b>0.000</b>         | <b>0.006</b> |
| <b>B</b>  | <b>6.50</b>               | <b>6.70</b>  | <b>0.256</b>         | <b>0.264</b> |
| <b>C</b>  | <b>0.46</b>               | <b>0.580</b> | <b>0.018</b>         | <b>0.230</b> |
| <b>C1</b> | <b>0.46</b>               | <b>0.580</b> | <b>0.018</b>         | <b>0.030</b> |
| <b>D</b>  | <b>5.10</b>               | <b>5.46</b>  | <b>0.201</b>         | <b>0.215</b> |
| <b>E</b>  | <b>2.186</b>              | <b>2.386</b> | <b>0.086</b>         | <b>0.094</b> |
| <b>F</b>  | <b>0.74</b>               | <b>0.94</b>  | <b>0.029</b>         | <b>0.037</b> |
| <b>F1</b> | <b>0.660</b>              | <b>0.860</b> | <b>0.026</b>         | <b>0.034</b> |
| <b>L</b>  | <b>9.80</b>               | <b>10.40</b> | <b>0.386</b>         | <b>0.409</b> |
| <b>L1</b> | <b>2.9REF</b>             |              | <b>0.114REF</b>      |              |
| <b>L2</b> | <b>6.00</b>               | <b>6.20</b>  | <b>0.236</b>         | <b>0.244</b> |
| <b>L3</b> | <b>0.60</b>               | <b>1.00</b>  | <b>0.024</b>         | <b>0.039</b> |
| $\theta$  | <b>3°</b>                 | <b>9°</b>    | <b>3°</b>            | <b>9°</b>    |