


SMD Type

MAGNETIC TRANSDUCER

KSSGI4B20




Dimension

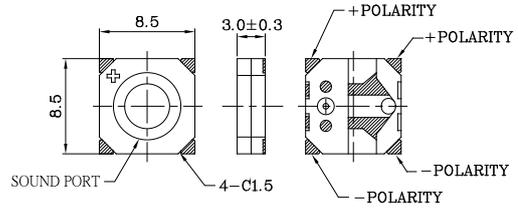

Tol: ± 0.5 Unit: mm

Rated Frequency (Hz)	2,730
Rated Voltage (Vo-p)	3.6
Current Consumption (mA)	Max. 80
Sound Pressure Level (dB)	Min. 85 (Typical 90)@5cm
Coli Resistance (Ω)	20.0 ± 3.0
Operating Voltage Range (Vo-p)	3.0 ~ 5.0
Operating Temperature (°C)	-30 ~ +70
Storage Temperature (°C)	-40 ~ +85
Dimension (mm)	L8.5xW8.5xH3.0
Material	L.C.P (White)

Characteristic

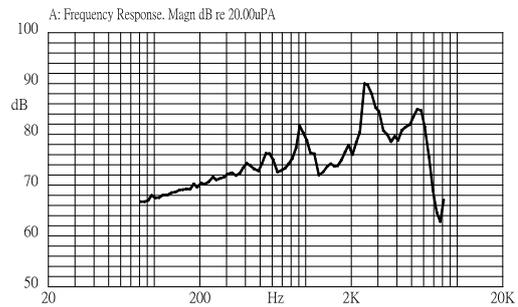

B Magnetic Buzzer


SMD Type

MAGNETIC TRANSDUCER

KSSGJ4B20-NEW



Dimension

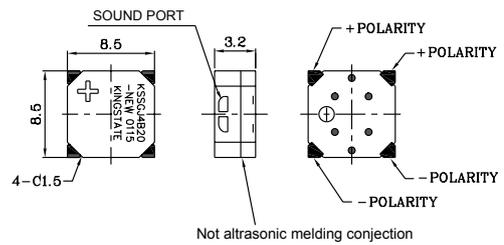

Tol: ± 0.5 Unit: mm

Rated Frequency (Hz)	2,730
Rated Voltage (Vo-p)	3.6
Current Consumption (mA)	Max. 80
Sound Pressure Level (dB)	Min. 90 (Typical 97)@5cm
Coli Resistance (Ω)	20.0 ± 3.0
Operating Voltage Range (Vo-p)	3.0 ~ 5.0
Operating Temperature (°C)	-30 ~ +70
Storage Temperature (°C)	-40 ~ +85
Dimension (mm)	L8.5xW8.5xH3.2
Material	L.C.P (White)

Characteristic

