


SMD Type

MAGNETIC TRANSDUCER

**KSSGJ4D20
KSSGJ4D20-H**




Dimension

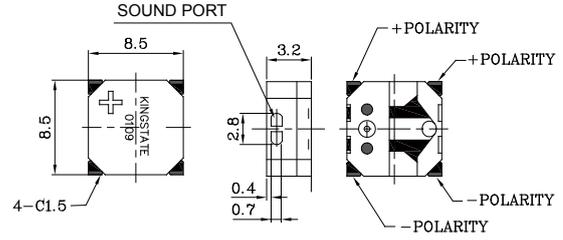

Tol: ± 0.5 Unit: mm

Model Number	KSSGJ4D20	KSSGJ4D20-H
Rated Frequency (Hz)	3,100	
Rated Voltage (Vo-p)	3.6	
Current Consumption (mA)	Max. 80	
Sound Pressure Level (dB)	Min. 90 (Typical 97)@5cm	Min. 95 (Typical 97)@5cm
Coli Resistance (Ω)	20.0 ± 3.0	
Operating Voltage Range (Vo-p)	3.0 ~ 5.0	
Operating Temperature (°C)	-30 ~ +70	
Storage Temperature (°C)	-40 ~ +85	
Dimension (mm)	L8.5xW8.5xH3.2	
Material	L.C.P (White)	

Characteristic

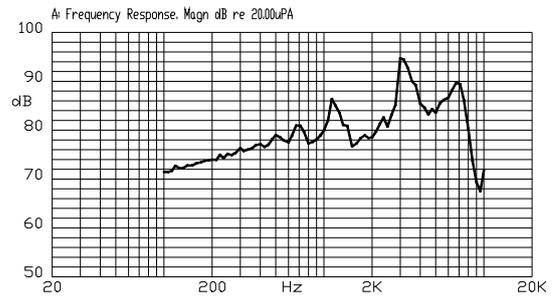


SMD Type

MAGNETIC TRANSDUCER

KSSG74B17-3



Dimension

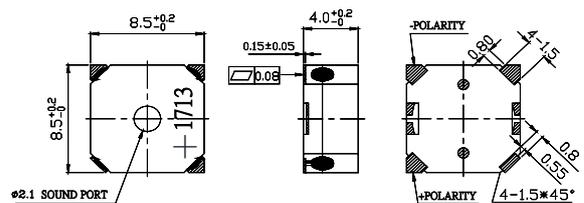

Tol: ± 0.5 Unit: mm

Rated Frequency (Hz)	4,000
Rated Voltage (Vo-p)	5.0
Current Consumption (mA)	Max. 150
Sound Pressure Level (dB)	Min. 100@10cm
Coli Resistance (Ω)	13.0 ± 3.0
Operating Voltage Range (Vo-p)	1.0 ~ 6.0
Operating Temperature (°C)	-20 ~ +70
Storage Temperature (°C)	-40 ~ +85
Dimension (mm)	L8.5xW8.5xH4.0
Material	L.C.P (Black)

Characteristic

