



**CHENMKO ENTERPRISE CO.,LTD**

*Halogens free devices*

**SURFACE MOUNT ZENER**  
**SILICON PLANAR POWER ZENER DIODES**  
**VOLTAGE RANGE 15V**

**MMSZ524) BGP!5**

**FEATURE**



- \* Small surface mounting type. (SC-79/SOD-523)
- \* High temperature soldering type.
- \* ESD rating of class 3(>16 kV) per human body model.
- \* Silicon planar zener diodes.
- \* Silicon-oxide passivated junction.
- \* Low temperature coefficient voltage
- \* 500 mW Rating on FR-4 or FR-5 Board

**MECHANICAL**

- \* SC-79/SOD-523 Packaging.
- \* Cathode indicated by polarity band.
- \* Mounting position: Any.



**SC-79/SOD-523**



Dimensions in millimeters

**SC-79/SOD-523**

**CIRCUIT**



**MAXIMUM RATINGS** ( At  $T_A = 25^\circ\text{C}$  unless otherwise noted )

RATINGS	SYMBOL	VALUE	UNITS
Zener Current ( see Table "Characteristics" )	-	-	-
Max. Steady State Power Dissipation @ $T_A=25^\circ\text{C}$	$P_D$	225	mW
Max. Operating Temperature Range	$T_J$	-65 to +150	$^\circ\text{C}$
Storage Temperature Range	$T_{STG}$	-65 to +150	$^\circ\text{C}$

**ELECTRICAL CHARACTERISTICS** ( At  $T_A = 25^\circ\text{C}$  unless otherwise noted )

CHARACTERISTICS	SYMBOL	MIN.	TYP.	MAX.	UNITS
Thermal Resistance Junction to Ambient	$R_{\theta JA}$	-	-	556	$^\circ\text{C/W}$
Max. Instantaneous Forward Voltage at $I_F = 10\text{mA}$	$V_F$	-	-	0.9	Volts

- NOTES : 1. The JEDEC type numbers listed have a standard tolerance on the normal zener voltage of +10%. Suffix B=+5%. 2002-10
2. The zener impedance is derived from 1KHz AC voltage, which results when an AC current having an RMS value equal to 10% of DC zener current ( $I_{ZT}$  or  $I_{ZK}$ ) is superimposed on  $I_{ZT}$  or  $I_{ZK}$ . Zener impedance is measured at two points to insure a sharp knee on the breakdown curve to eliminate unstable units.
3. Valid provided that electrodes at distance of 10mm from case are kept ambient temperature.
4. Measured under thermal equilibrium and DC test conditions.
5. The rating listed in the electrical characteristics table is maximum peak, non-repetitive, reverse surge current of 1/2 square wave or equivalent sine wave pulse of 1/120 second duration superimposed on the test current,  $I_{ZT}$ , per JEDEC registration.

## ELECTRICAL CHARACTERISTICS ( MMSZ524) BGP!5 )

TYPE	Zener voltage $V_z$ (V) @ $I_{zT}$			Test current	Maximum Zener impedance			Maximum reverse leakage current	
	Min	Nom	Max		at $I_{zT}$ ( $\Omega$ )	$Z_{ZK}$ ( $\Omega$ )	at $I_{zk}$ (mA)	$I_R$ ( $\mu$ A)	at $V_R$ (V)
	Volts	Volts	Volts						
MMSZ5245BGP-A	14.25	15	15.75	5	32	600	0.25	0.1	11

## RATING CHARACTERISTIC CURVES ( MMSZ524) BGP!5 )

FIG. 5 - TYPICAL CAPACITANCE

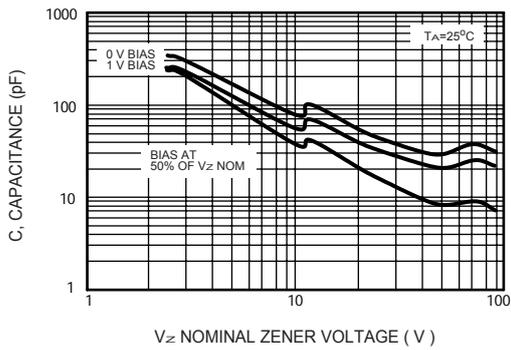


FIG. 6 - TYPICAL LEAKAGE CURRENT

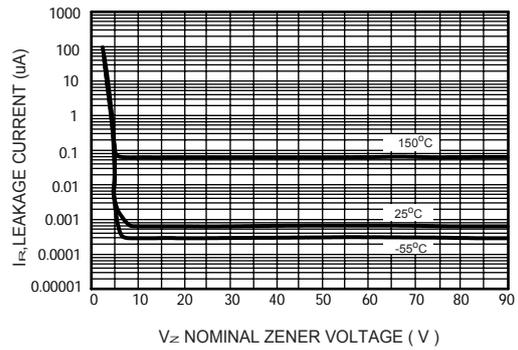


FIG. 7 - ZENER VOLTAGE VERSUS ZENER CURRENT  
( $V_z$  UP TO 12V)


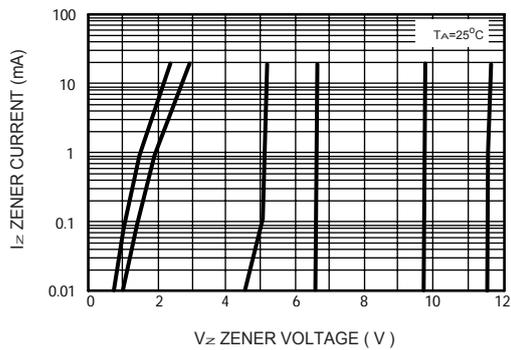


FIG. 8 - ZENER VOLTAGE VERSUS ZENER CURRENT  
(12V TO 91V)




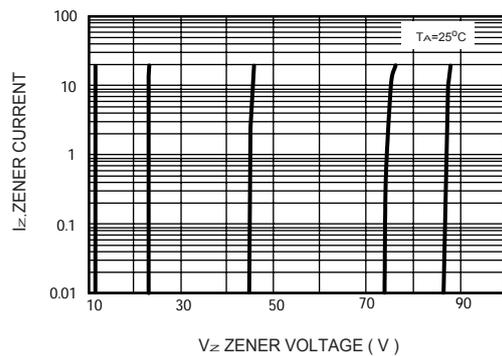

**CHENMKO ENTERPRISE CO.,LTD**


**SURFACE MOUNT**  
**RECOMMENDED FOOT PRINT**  
*all dimensions in mm*

**SC-79**

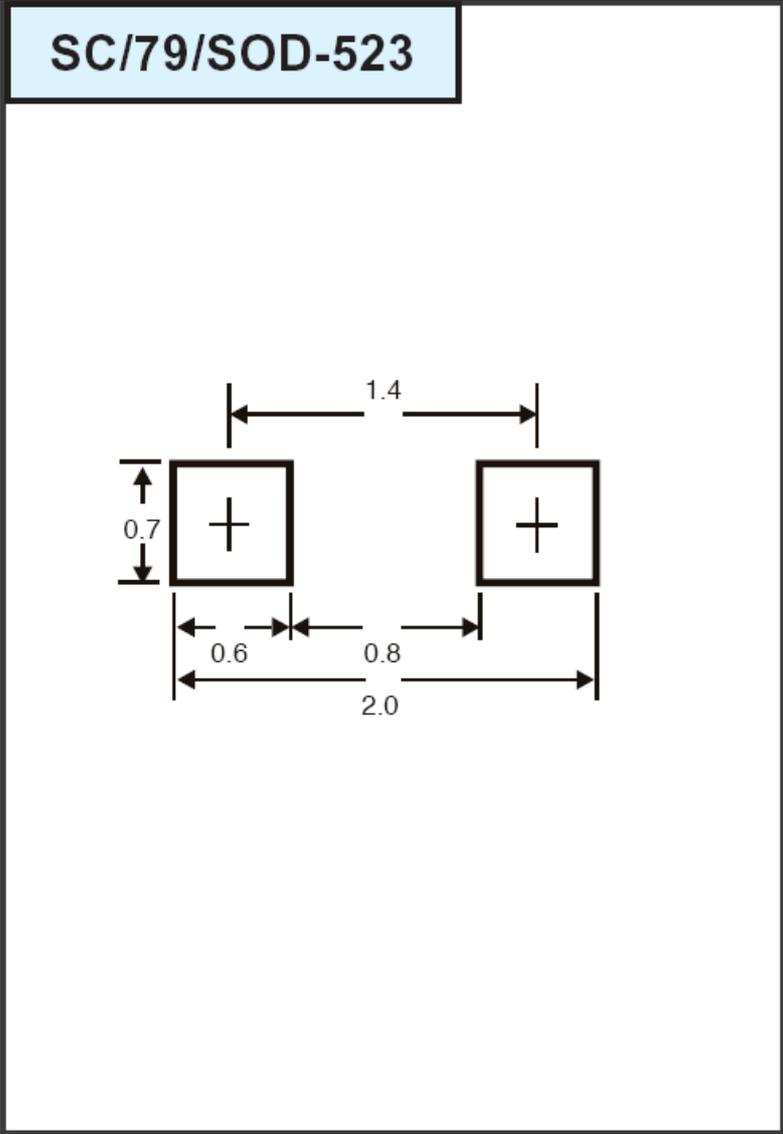

# The Marking and Part No. for MMSZ5245BGP-A (SC-79)

Marking:

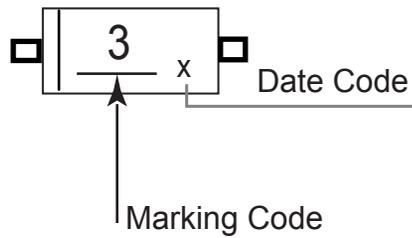

## Date Code Standard

Date Code	N	P	Q	R	S	T	U	V	W	X	Y	Z
2014Year	JAN.	FEB.	MAR.	APR	MAY	JUNE	JULY	AUG.	SEP.	OCT	NOV.	DEC.

Date Code	A	B	C	D	E	F	G	H	J	K	L	M
2015Year	JAN.	FEB.	MAR.	APR	MAY	JUNE	JULY	AUG.	SEP.	OCT	NOV.	DEC.

CUSTOMER :	APPROVED : DANY	 <b>CHENMKO LTD.</b>
APPROVED :	CHECKED : ANGEL	
CHECKED :	DRAWN : BEN	
		DRAWING No. :