Technical Data

PST KK1047

HIGH POWER FAST SWITCHING THYRISTOR FOR INVERTER AND CHOPPER APPLICATIONS

Features :

- Blocking Capability up to 1400 V
- High dV/dt Capability
- All Diffused Structure
- Amplifying Gate Configuration
- Rugged Ceramic Hermetic Package

ELECTRICAL CHARACTERISTICS AND RATINGS

Blocking

Parameter	Symbol	Min	Max	Typ	Unit	Conditions
Repetitive peak reverse voltage	V_{RRM}		1400		V	Tj = -40 °C to 125 °C
Repetitive peak off-state voltage	V_{DRM}		1400		V	Tj = -40 °C to 125 °C
Non repetitive peak reverse voltage	V_{RSM}		1500		V	Tj = -40 °C to 125 °C
Repetitive peak reverse current	I_{RRM}		100		mA	Tj = Tjmax , V = V_{RRM}
Repetitive peak off-state current	I_{DRM}		100		mA	Tj = Tjmax ,V = V_{DRM}

Conducting

Parameter	Symbol	Min	Max	Typ	Unit	Conditions
Average value of on-state current	$I_{T(AV)}$		1050		A	50 Hz sine wave,180° conduction, T_c = 85 °C
RMS value of on-state current	$I_{T(RMS)}$		1649		A	50 Hz sine wave,180° conduction, T_c = 85 °C
Surge non repetitive current	I_{TSM}		16		kA	50 Hz sine wave Half cycle V_R = 0 $T_j = T_{jmax}$
I square t	I^2t		1280		kA^2s	
Peak on-state voltage	V_{TM}		1.8		V	On-state current 2000 A, Tj= Tjmax
Threshold voltage	$V_{T(TO)}$		1.30		V	$T_j = T_{jmax}$
On-state slope resistance	r_T		0.23		mΩ	$T_j = T_{jmax}$
Holding current	I_H			200	mA	V_D = 12 V; I_T = 2.5 A
Latching current	I_L			400	mA	V_D = 12 V; R_L = 12 Ω

PST KK1047

HIGH POWER FAST SWITCHING THYRISTOR

Triggering

Parameter	Symbol	Min	Max	Typ	Unit	Conditions
Gate current	I_{GT}		300		mA	V_D = 6 V, R_L = 3 Ω, Tj = - 40 °C
			150		mA	V_D = 6 V, R_L = 3 Ω, Tj = 25 °C
			125		mA	V_D = 6 V, R_L = 3 Ω, Tj = 125 °C
Gate voltage	V_{GT}		5		V	V_D = 6 V, R_L = 3 Ω, Tj = - 40 °C
			3		V	V_D = 6 V, R_L = 3 Ω, Tj = 0 ÷ 125 °C
		0.3			V	V_D = V_{DRM}, R_L = 1 kΩ, Tj = 125 °C
Peak gate current	I_{GM}		10		A	
Peak reverse gate voltage	V_{RGM}		5		V	
Peak gate power dissipation	P_{GM}		200		W	
Average gate power dissipation	$P_{G(AV)}$		5		W	

Switching

Parameter	Symbol	Min	Max	Typ	Unit	Conditions
Critical rate of rise of on-state current	**di/dt**		800		A/µs	$I_G = 5 \cdot I_{GT}$, t_r = 1µs, $V_{DRM} \leq$ 1000V, $T_j = T_{jmax}$
Critical rate of rise of on-state voltage	**dv/dt**		500		V/µs	Linear ramp up to 80% of V_{DRM}
Gate controlled delay time	t_d		1.5	0.7	µs	I_{TM} = 50 A, V_D = V_{DRM},V_G = 20 V R_G = 20 Ω, t_r = 0.1 µs, t_p = 20 µs
Turn-off time	t_q		25		µs	I_{TM} = 1000 A; di/dt = 100 A/µs;$V_R \geq$ 50 V dV/dt = 200 V/µs linear to 80% V_{DRM} V_G = 0 V; $T_j = T_{jmax}$
Reverse recovery charge	Q_{rr}		*	400	µC	I_T = 1000 A di/dt = 100 A/µs $V_R \geq$ 50 V $T_j = T_{jmax}$
Reverse recovery current	I_{rr}		*	200	A/µs	

** for guaranteed max value, please contact Factory*

Thermal and mechanical

Parameter	Symbol	Min	Max	Typ	Unit	Conditions
Operating temperature	T_j	-40	125		°C	
Storage temperature	T_{stg}	-40	150		°C	
Thermal resistance junction to case	$R_{th(j-c)}$		0.020		°C/W	Double side cooled , 180° SIN
Thermal resistance case to sink	$R_{th(c-s)}$		0.006		°C/W	Double side cooled, mounting surfaces smooth, flat and greased
Mounting force	**F**	20	22		kN	
Weight	**W**			480	g	

PST KK1047

HIGH POWER FAST SWITCHING THYRISTOR

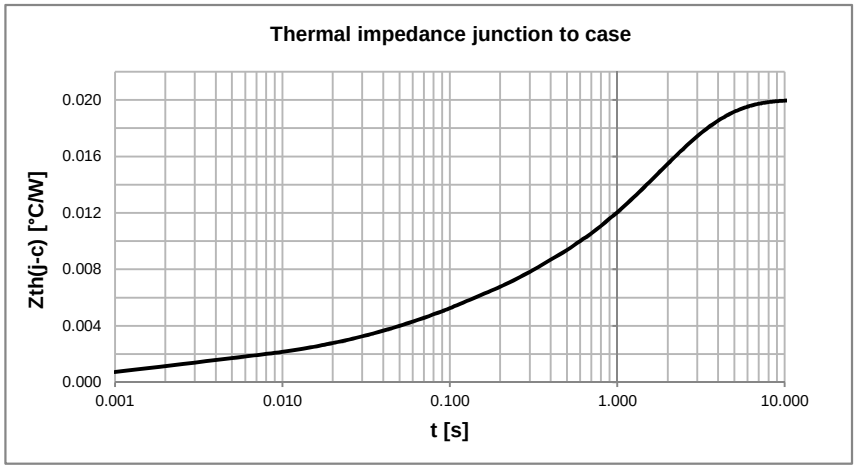

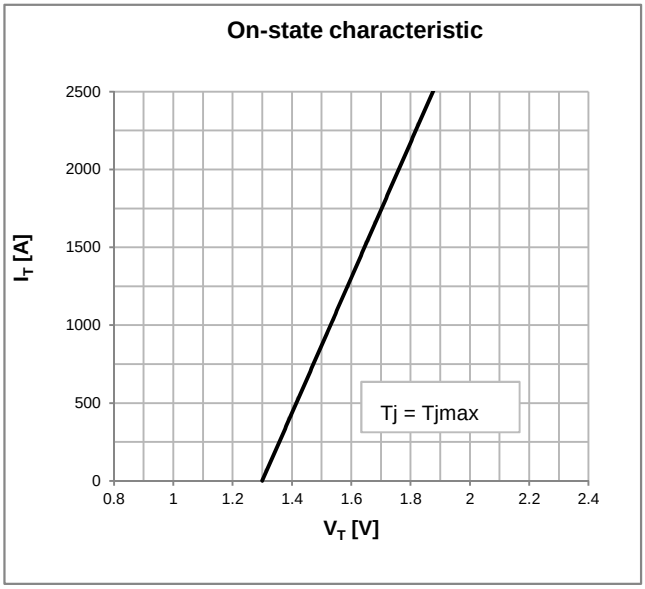

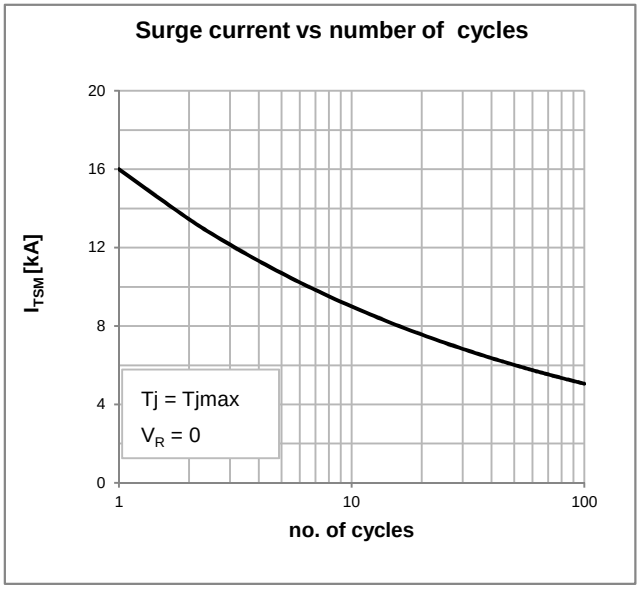

OUTLINE AND DIMENSIONS

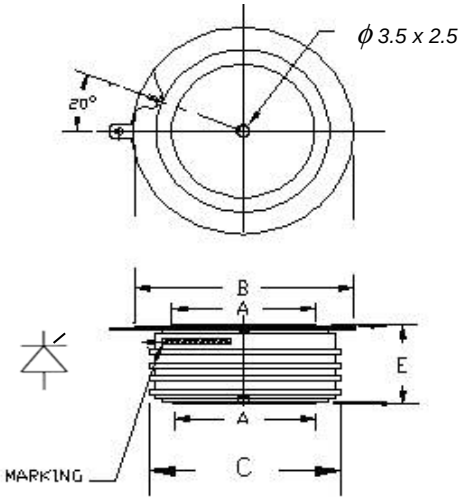

	A	B	C	E
mm	47	75	66	26 ± 0.5

- All the characteristics given in this data sheet are guaranteed only with uniform clamping force, cleaned and lubricated heatsink surfaces with flatness < 0.03 mm and roughness < 2µm