

STANDARD RECOVERY DIODES

Stud Version

Features

- Alloy diode
- Peak reverse voltage up to 1000V
- Popular series for rough service
- Standard JEDEC types
- Stud cathode and stud anode version


Typical Applications

- Welders
- Power supplies
- Motor controls
- Battery chargers
- General industrial current rectification

Major Ratings and Characteristics

Parameters	70U	300U	Units
$I_{F(AV)}$	250	300	A
@ T_c	150	130	°C
I_{FSM} @ 50Hz	6550		A
@ 60Hz	6850		A
I^2t @ 50Hz	214		KA ² s
@ 60Hz	195		KA ² s
V_{RRM} range	100 to 1000	50 to 1000	V
T_j	-65 to 200		°C

250A
300A

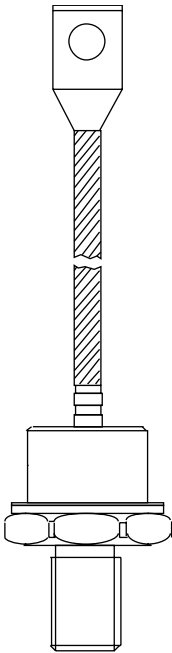

case style
DO-205AB (DO-9)

70/300U(R) Series

Bulletin I2039 11/94

International
IOR Rectifier

ELECTRICAL SPECIFICATIONS

Voltage Ratings

Type number *	Voltage Code	V_{RRM} , maximum repetitive peak reverse voltage V	V_{RSM} , maximum non-repetitive peak rev. voltage V	I_{RRM} max. $T_J = 200^\circ\text{C}$ mA
70U	10	100	200	60
	20	200	300	
	40	400	500	
	60	600	720	
	80	800	960	
	100	1000	1200	
Type number	Voltage Code	V_{RRM} , maximum repetitive peak reverse voltage V	V_{RSM} , maximum non-repetitive peak rev. voltage V	I_{RRM} max. $T_J = 175^\circ\text{C}$ mA
300U	5	50	100	40
	10	100	200	40
	20	200	300	40
	30	300	400	40
	40	400	500	40
	60	600	720	40
	80	800	960	35
	100	1000	1200	30

* Also available as JEDEC series: 1N3735 through 1N3743; 1N2054 through 1N2068; 1N4044 through 1N4056.

Forward Conduction

Parameter	70U	300U	Units	Conditions
$I_{F(AV)}$ Max. average forward current @ Case temperature	250 150	300 130	A $^\circ\text{C}$	180° conduction, half sine wave
I_{FSM} Max. peak, one-cycle forward, non-repetitive surge current	6550 6850 5500 5750	A	t = 10ms t = 8.3ms t = 10ms t = 8.3ms	No voltage reapplied 100% V_{RRM} reapplied Sinusoidal half wave, Initial $T_J = T_J$ max.
I^2t Maximum I^2t for fusing	214 195 151 138			No voltage reapplied 100% V_{RRM} reapplied
$I^2\sqrt{t}$ Maximum $I^2\sqrt{t}$ for fusing	2140			t = 0.1 to 10ms, no voltage reapplied
$V_{F(TO)}$ Max. value of threshold voltage	0.610		V	$T_J = 200^\circ\text{C}$
r_f Max. value of forward slope resistance	0.751		m Ω	
V_{FM} Max. peak forward voltage	1.30 --	-- 1.40	V V	$(I_{FM} \times \pi \times I_{F(AV)})$ (785A peak), $T_J = 25^\circ\text{C}$ $(I_{FM} \times \pi \times I_{F(AV)})$ (942A peak), $T_J = 25^\circ\text{C}$

Thermal and Mechanical Specifications

Parameter	70/300U(R)	Units	Conditions
T _j Max. junction operating temperature range	-65 to 200	°C	
T _{stg} Max. storage temperature range	-65 to 200		
R _{thJC} Max. thermal resistance, junction to case	0.18	K/W	DC operation
R _{thCS} Max. thermal resistance, case to heatsink	0.08		Mounting surface, smooth, flat and greased
T Max. allowed mounting torque +0 -20%	37	Nm	Not lubricated threads
	28		Lubricated threads
wt Approximate weight	250	g	
Case style	DO-205AB (DO-9)**		JEDEC (See Outline Table)

** 302U-A uses IR case style B-26

ΔR_{thJC} Conduction

(The following table shows the increment of thermal resistance R_{thJC} when devices operate at different conduction angles than DC)

Conduction angle	Sinusoidal conduction	Rectangular conduction	Units	Conditions
180°	0.020	0.015	K/W	T _j = T _j max.
120°	0.024	0.025		
90°	0.031	0.034		
60°	0.045	0.047		
30°	0.077	0.077		

Ordering Information Table

Device Code					
300	U		R	100	A
①	②	③	④	⑤	⑥
1	- 300	= Standard 300U device			
	70	= Standard 70U device			
	302	= 300U Top Threaded version			
	72	= 70U with Pinch Bolt			
2	- U	= Essential Part Number			
3	- F	= Flat Base, available only on 72UF Series			
	None	= Normal Stud Base 3/4"-16UNF-2A			
4	- R	= Stud Reverse Polarity (Anode to Stud)			
	None	= Stud Normal Polarity (Cathode to Stud)			
5	-	Voltage code: Code x 10 = V _{RRM} (See Voltage Ratings table)			
6	- A	= Essential Part Number only for 300U Series			
	None	= 70U Series			
NOTE: For longer lead Contact Factory					

Bulletin I2039 11/94

IOR Rectifier

302U-A Series
IR Case Style B26
All dimensions in millimeters (inches)

Technical drawing of the 302U-A Series IR Case Style B26. The drawing includes a front view and a side view. The front view shows a cylindrical component with a threaded section and a base. Dimensions include: 11.51 (0.453) / 10.74 (0.423) for the top section, 19.18 (0.755) MAX. for the top diameter, 8.89 (0.350) / 8.38 (0.330) DIA. for the top hole, 149.9 (5.90) / 134.6 (5.30) for the total height, 53.34 (2.10) MAX. for the main body height, 27.94 (1.10) DIA. MAX. for the base diameter, 9.27 (0.365) / 7.87 (0.310) for the base hole, 31.75 (1.250) / 30.94 (1.218) ACROSS FLATS for the base, 3.18 (0.125) MAX. UNTHREADED PORTION for the base, 21.03 (0.83) / 20.14 (0.79) for the base hole, 3/4"-16UNF-2A* for the base thread, and 19.02 (0.749) DIA. MAX. for the base diameter. The side view shows a bent section with dimensions: 4.32 (0.170) MAX. for the bend, 13.46 (0.530) / 11.94 (0.470) for the bend height, and 27.94 (1.10) DIA. MAX. for the base diameter.

* METRIC DEVICE. M16 X 1.5 FOR 300U..AM
METRIC DEVICE. M20 X 1.5 FOR 300U..AMA

Outline Table

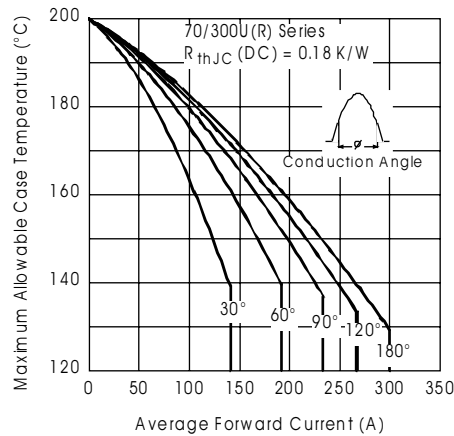
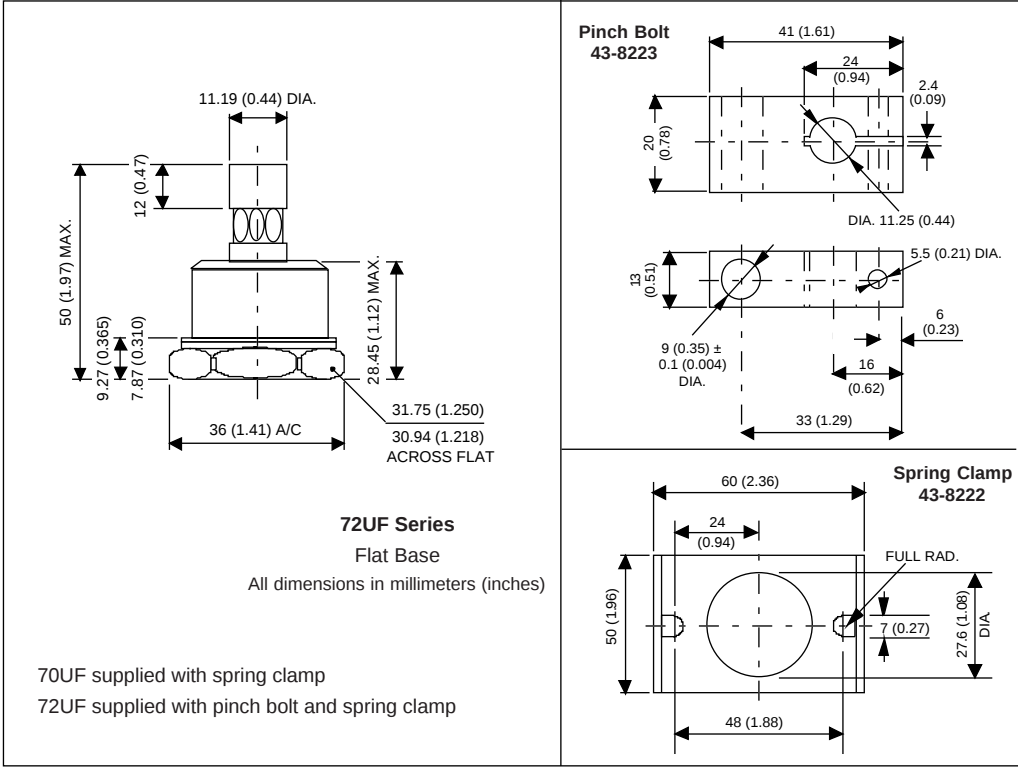


Fig. 1 - Current Ratings Characteristics

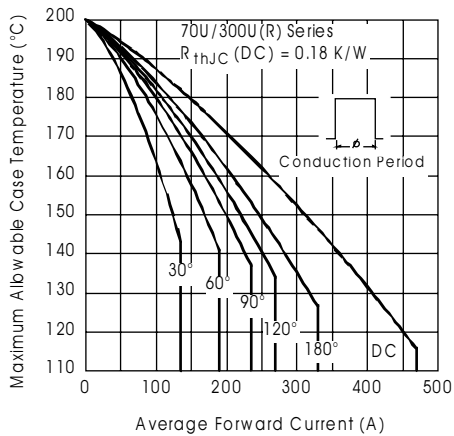


Fig. 2 - Current Ratings Characteristics

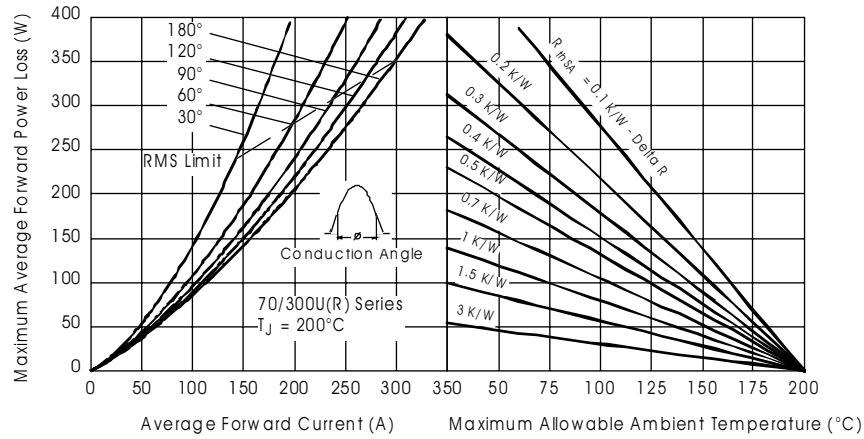


Fig. 3 - Forward Power Loss Characteristics

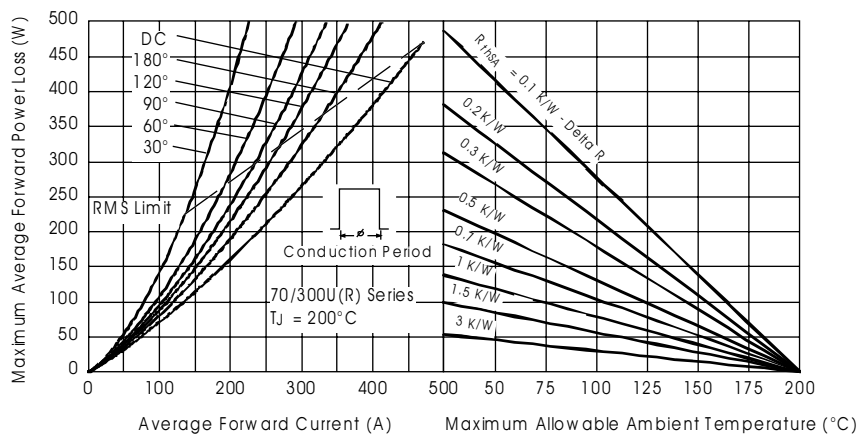


Fig. 4 - Forward Power Loss Characteristics

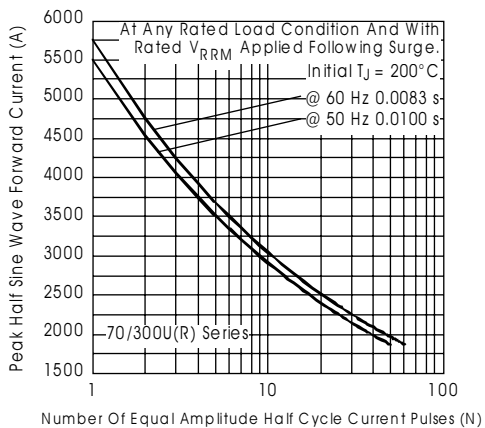


Fig. 5 - Maximum Non-Repetitive Surge Current

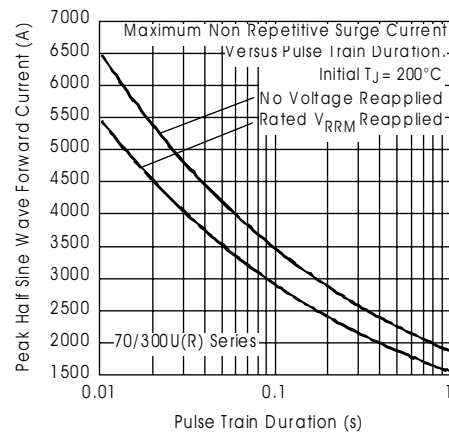


Fig. 6 - Maximum Non-Repetitive Surge Current

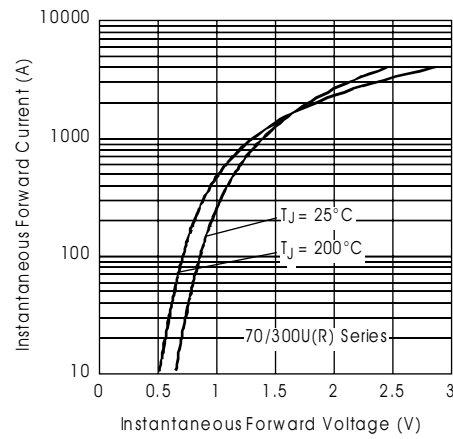


Fig. 7 - Forward Voltage Drop Characteristics

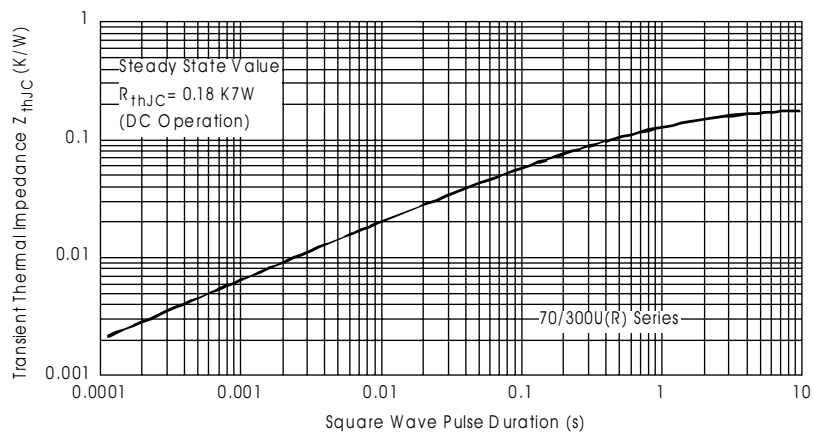


Fig. 8 - Thermal Impedance Z_{thJC} Characteristic