


**SURFACE MOUNT
FAST SWITCHING DIODE**
**REVERSE VOLTAGE – 100 Volts
FORWARD CURRENT – 0.2 Ampere**
FEATURES

- Fast Switching Speed
- Ideally suited for automatic insertion
- For general purpose switching applications

MECHANICAL DATA

- Case: SOT-323 Plastic
- Case Material: “Green” molding compound, UL flammability classification 94V-0, (No Br. Sb. Cl)
- Moisture Sensitivity: Level 1 per J-STD-020D
- Lead Free in RoHS 2002/95/EC Compliant

SOT-323


SOT-323		
Dim.	Min.	Max.
A	1.80	2.20
B	1.15	1.35
C	0.80	1.00
D	0.30	0.40
G	1.20	1.40
H	0.00	0.10
J	0.10	0.25
K	0.425 Ref.	
L	0.650 Bsc	
N	0.700 Ref.	
S	2.00	2.40
Dimensions in millimeter		

Maximum Ratings & Thermal Characteristics @ $T_A = 25^\circ\text{C}$ unless otherwise specified

Characteristic	Symbol	MMBD7000W	Units
Repetitive Peak Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	100	V
Forward Current	I_F	200	mA
Peak Forward Surge Current	I_{FM}	500	mA
Power Dissipation	P_D	225	mW
Thermal Resistance Junction to Ambient	$R_{\theta JA}$	417	$^\circ\text{C}/\text{W}$
Operating Temperature Range	T_J	150	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-55~+150	$^\circ\text{C}$

Electrical Characteristics @ $T_A = 25^\circ\text{C}$ unless otherwise specified

Characteristic	Test Condition	Symbol	MMBD7000W	Unit
Reverse Breakdown Voltage	$I_R = 100\mu\text{A}$	V_{BR}	100	V
Maximum Forward Voltage	$I_F = 1\text{mA}$ $I_F = 10\text{mA}$ $I_F = 100\text{mA}$	V_F	0.7 0.82 1.1	V
Maximum DC Reverse Current at Rated DC Blocking Voltage	$V_R = 50\text{V}$ $V_R = 100\text{V}$ $V_R = 50\text{V}, 125^\circ\text{C}$	I_R	1 3 100	μA
Typical Diode Capacitance	$V_R = 0\text{V}, f = 1\text{MHz}$	C_D	1.5	pF
Reverse Recovery time	$I_F = I_R = 10\text{mA}$	t_{rr}	4	nS

REV. 0, Jan-2013, KSYR93

RATING AND CHARACTERISTIC CURVES

MMBD7000W



Fig.1 Typical Forward Characteristics

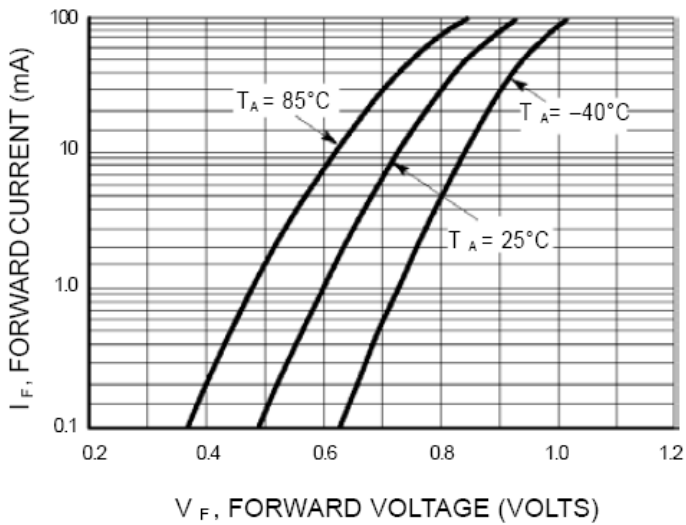


Fig.2 Typical Reverse Characteristics


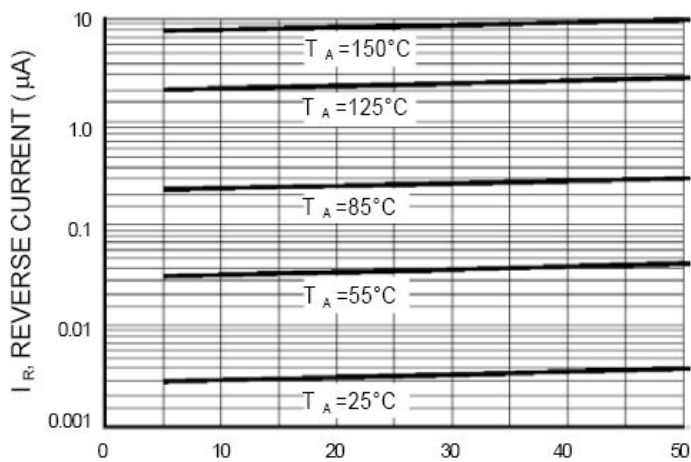


Fig.3 Typical Capacitance Characteristics

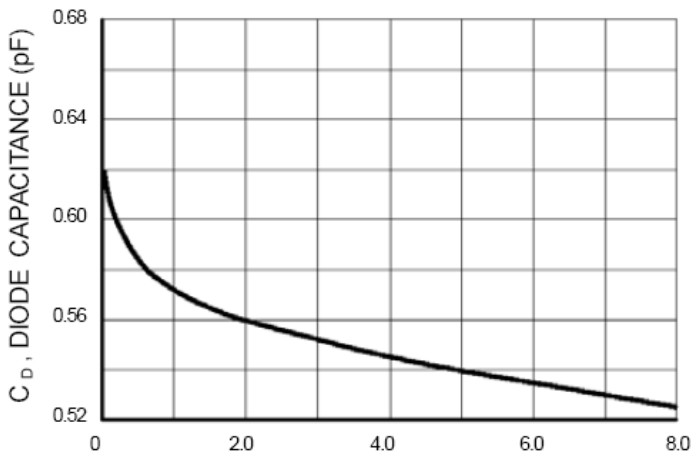

Device Marking:

Device P/N	Marking	Equivalent Circuit Diagram
MMBD7000W	M5C	

Important Notice and Disclaimer

LSC reserves the right to make changes to this document and its products and specifications at any time without notice. Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.

LSC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does LSC assume any liability for application assistance or customer product design. LSC does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.

No license is granted by implication or otherwise under any intellectual property rights of LSC.

LSC products are not authorized for use as critical components in life support devices or systems without express written approval of LSC.

New Marking Rule Notification

Range: In order to have well management in process control, the new marking rule is applied to small signal device including Switching Diode, Transistor and Schottky Diode.

Package: SOT-23 / SOT-323 / SOT-523

