





MMBD7000W

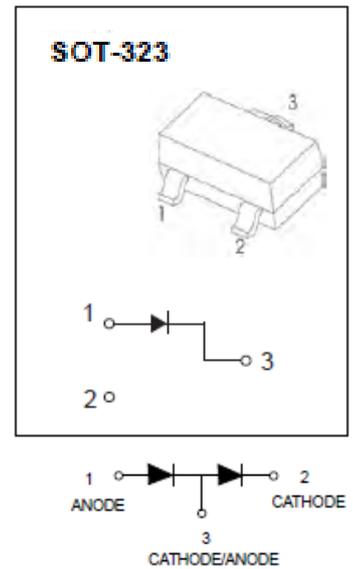

Dual Switching Diode

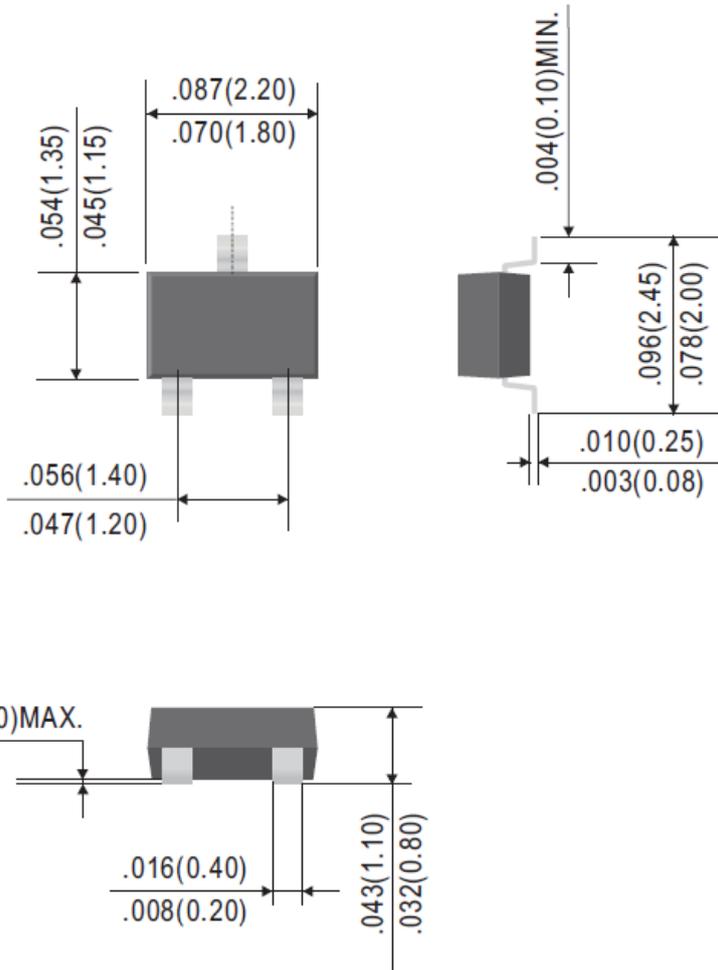

Dimensions in inches and (millimeters)

FEATURES

- Pb-Free package is available
- RoHS product for packing code suffix "G"
- Halogen free product for packing code suffix "H"
- Moisture Sensitivity Level 1

MARKING: MMBD7000W = M5C



MMBD7000W



Dual Switching Diode


Maximum Ratings (T _A =25°C unless otherwise specified)			
Rating	Symbol	Value	Unit
Reverse Voltage	V _R	100	Vdc
Forward Current	I _F	200	mAdc
Peak Forward Surge Current	I _{FM(surge)}	500	mAdc

Thermal Characteristics (T _A =25°C unless otherwise specified)			
Characteristic	Symbol	Max	Unit
Total Device Dissipation FR-5 Board ⁽¹⁾ T _A = 25°C Derate above 25°C	P _D	200	mW
		1.6	mW/°C
Thermal Resistance from Junction to Ambient	R _{θJA}	556	°C/W
Total Device Dissipation Alumina Substrate ⁽²⁾ T _A = 25°C Derate above 25°C	P _D	300	mW
		2.4	mW/°C
Thermal Resistance from Junction to Ambient	R _{θJA}	417	°C/W
Operating/ Junction and Storage Temperature Range	T _J , T _{STG}	-55~+150	°C

Electrical Characteristics (T _A =25°C unless otherwise specified)				
Characteristic	Symbol	Min.	Max.	Unit
OFF Characteristics				
Reverse Breakdown Voltage (I _{BR} = 100 μAdc)	V _(BR)	100	—	Vdc
Reverse Voltage Leakage Current (V _R = 50 Vdc)	I _R	—	1	μAdc
(V _R = 100 Vdc)		—	3	
(V _R = 50 Vdc, 125°C)		—	100	
Forward Voltage (I _F = 1.0 mAdc)	V _F	0.55	0.7	Vdc
(I _F = 10 mAdc)		0.67	0.82	
(I _F = 100 mAdc)		0.75	1.1	
Diode Capacitance (V _R = 0V)	C _T	—	1.5	pF
Reverse Recovery Time (I _F = I _R = 10 mAdc) (Figure 1)	t _{rr}	—	4	ns

1. FR-5 = 1.0 x 0.75 x 0.062 in.

2. Alumina = 0.4 x 0.3 x 0.024 in. 99.5% alumina.

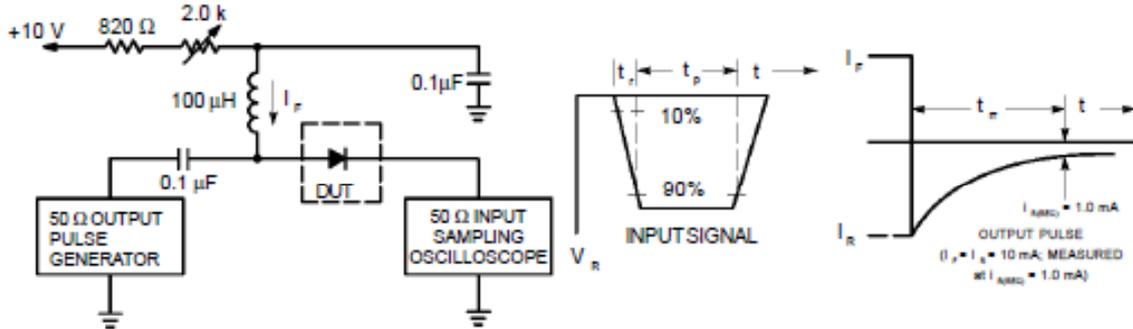

- Notes: 1. A 2.0 kΩ variable resistor adjusted for a Forward Current (I_F) of 10mA.
- 2. Input pulse is adjusted so $I_{R(Peak)}$ is equal to 10mA.
- 3. $t_p \gg t_r$

Figure 1. Recovery Time Equivalent Test Circuit

CURVES APPLICABLE TO EACH CATHODE

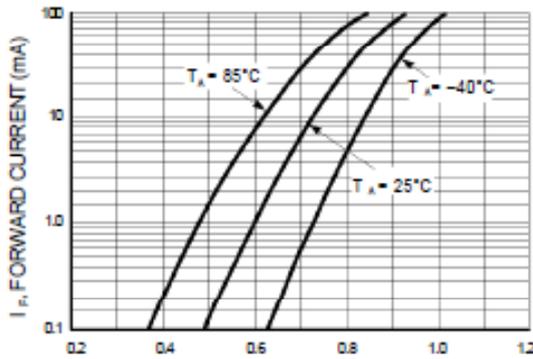


Figure 2. Forward Voltage

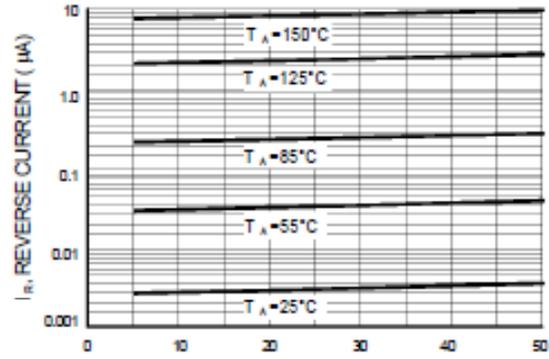


Figure 3. Leakage Current

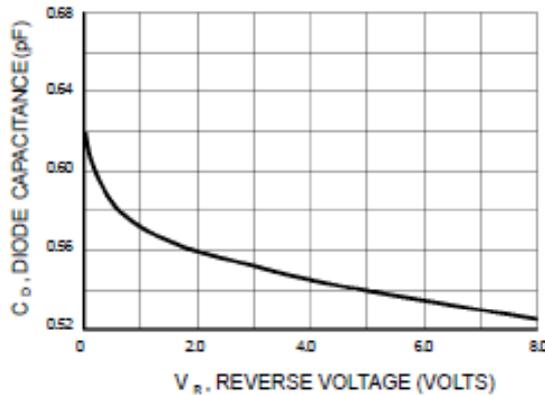


Figure 4. Capacitance