





Broadband Access Transformer


- Designed to meet UL 60950 and EN 60950 requirements for supplementary insulation and 250V working voltage
- RoHS Compliant
- Excellent THD performance
- Operating Temperature -40°C to 85°C

Electrical Specifications @25°C	
OCL:	PIN 1-5= 410uH $\pm$ 10% @ 10KHz/0.1V/Ser.
Leakage Inductance:	PIN 1-5= 10uH Max. @ 100KHz/0.1V
D.C.R:	PIN 1-4 = 790 mohm Max.
	PIN 2-5 = 790 mohm Max.
	PIN 9-6 = 450 mohm Max.
	PIN 10-7 = 350 mohm Max.
Hi-POT :	PRI. – SEC. =1875VAC/60Hz/2Seconds/1mA
Turn Ratio:	PIN1-4 : PIN 10-6 = 1.6 $\pm$ 2% :1

Dimensions (Units: mm)



Schematic

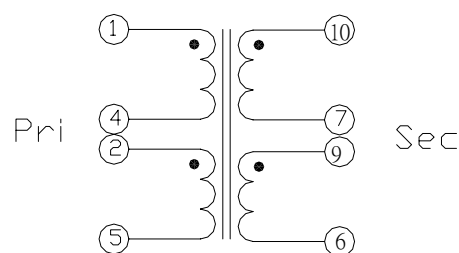

Mark

1. LAL ****----LAL2009
2. X----PRODUCT LINE
3. DATE CODE----YYWW
4. G----RoHS