

# IC for Regulator+Reset Monolithic IC MM1687 Series

## Outline

This IC is a regulator + reset IC developed for optical disc drives such as DVD-ROM drives. The output voltage of the regulator and detection voltage of the reset are fixed, while the output voltage of the reset and detection voltage of the reset are programmable ranging from 1.5V to 5.0V, and 2.7V to 5.0V respectively upon request.

## Features

1. Output voltage accuracy                       $\pm 2\%$
2. Dropout voltage                                0.12V typ. ( $I_o=150\text{mA}$ )
3. Large output current                         300mA max.
4. High ripple rejection                         80dB typ.
5. Incorporates a thermal shutdown circuit
6. Incorporates a current limit circuit
7. Reset detection voltage                      3.0 to 5.0V
8. Delay time from the voltage detection to the reset release can be easily programmed.


## Package

SOP-8D

## Applications


1. CD-ROM drive
2. Optical disc drivers

## Pin Assignment

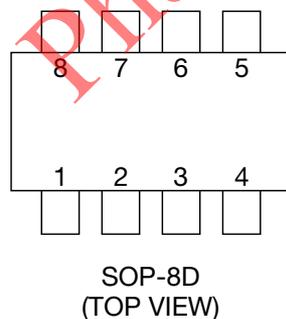

1	NC
2	Reset
3	V <sub>det</sub>
4	V <sub>IN</sub>
5	V <sub>OUT</sub>
6	NC
7	GND
8	Cd

Block Diagram

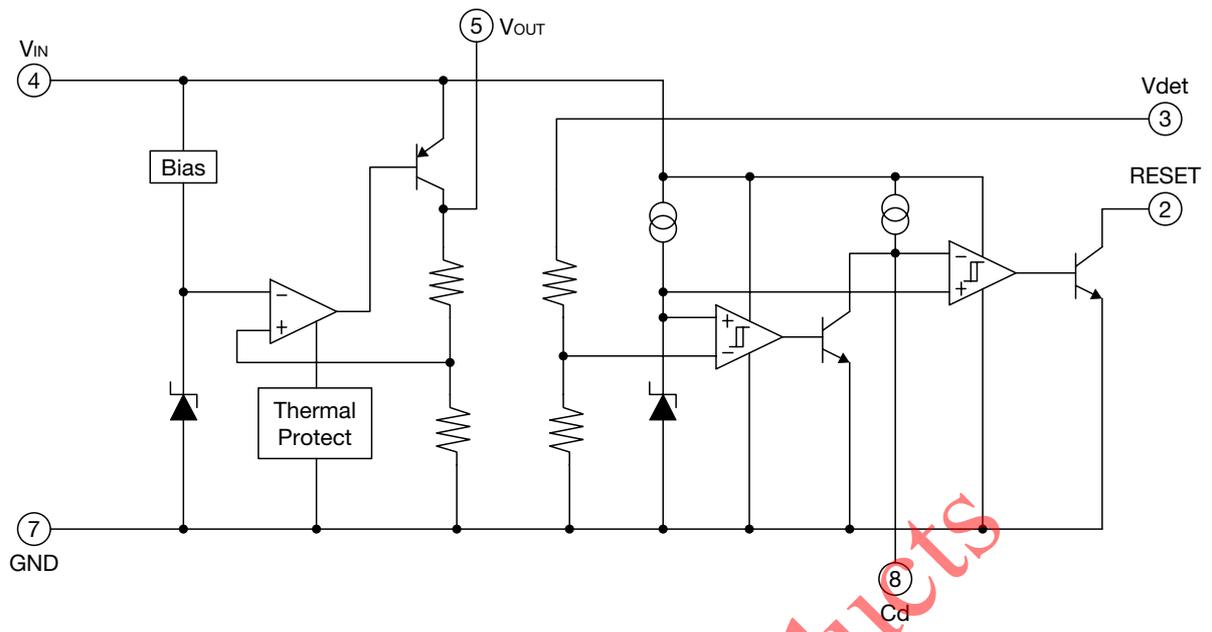

Phased Out Products

**Pin Description**

Pin No.	Pin name	Function	Internal equivalent circuit diagram						
1,6	NC								
2	Reset	Reset-output pin  Reset logical table <table border="1"> <tr> <td></td> <td>Reset</td> </tr> <tr> <td><math>V_{det} &lt; V_s</math></td> <td>L</td> </tr> <tr> <td><math>V_{det} &gt; V_s</math></td> <td>H</td> </tr> </table>		Reset	$V_{det} < V_s$	L	$V_{det} > V_s$	H	
	Reset								
$V_{det} < V_s$	L								
$V_{det} > V_s$	H								
3	$V_{det}$	Voltage-supply pin (RESET)							
4	$V_{IN}$	Input pin  The capacitor is required to connect with the input pin more than 1 $\mu$ F.							
5	$V_{OUT}$	Output pin							
7	GND	Ground							
8	$C_d$	Delay time capacitor pin  The delay time of reset output can be set according to the capacitor value connected with $C_d$ .  $t_{PLH} = 450000 \cdot C$ $t_{PLH1}$ : Delay time (s) C: capacitance (F)							

**Absolute Maximum Ratings** ( $T_a=25^\circ\text{C}$ )

Item	Symbol	Ratings	Units
Storage temperature	$T_{STG}$	-55~+150	$^\circ\text{C}$
Supply voltage	$V_{IN}$	-0.3~+10	V
Output current	$I_{OUT}$	500	mA
Power dissipation	$P_d$	950 (*1)	mW

Note1: \*1 Glass epoxy attached on PC Board (192 × 142 × 1.2mm)

**Recommended Operating Conditions** (Ta=25°C)


Item	Symbol	Ratings	Units
Operating temperature	T <sub>OP</sub>	-40~+85	°C
Output current	I <sub>OUT</sub>	0~400	mA
Operating voltage	V <sub>OP</sub>	0~+10	V

**Electrical Characteristics** (Except where noted otherwise, Ta=25°C, V<sub>CONT</sub>=1.6V)


Item	Symbol	Measurement conditions	Min.	Typ.	Max.	Units
No-load Input current 1	I <sub>ccq1</sub>	V <sub>IN</sub> =5V I <sub>OUT</sub> =0mA		0.6	1.2	mA
Vdet pin current	I <sub>ccq3</sub>	V <sub>det</sub> =5V		20	40	μA
<b>Regulator Block</b>						
Output voltage	V <sub>OUT</sub>	V <sub>IN</sub> =5V I <sub>OUT</sub> =30mA	3.234	3.30	3.366	V
Dropout voltage	V <sub>io</sub>	V <sub>IN</sub> =3.1V I <sub>OUT</sub> =300mA		0.25	0.50	V
Line regulation	ΔV <sub>1</sub>	V <sub>IN</sub> =4.5V~5.5V I <sub>OUT</sub> =30mA		10	20	mV
Load regulation	ΔV <sub>2</sub>	V <sub>IN</sub> =5V I <sub>OUT</sub> =0mA~300mA		20	120	mV
V <sub>OUT</sub> temperature coefficient *1	$\frac{\Delta V_{OUT}}{\Delta T}$	T <sub>j</sub> =-40~+85°C V <sub>IN</sub> =5V, I <sub>OUT</sub> =30mA		100		ppm/°C
Ripple rejection *1	RR	V <sub>IN</sub> =5V f=1kHz V <sub>ripple</sub> =1V I <sub>OUT</sub> =30mA	50	80		dB
Output noise voltage *1	V <sub>n</sub>	V <sub>IN</sub> =5V f=20~80kHz I <sub>OUT</sub> =30mA		40	120	μV <sub>rms</sub>
<b>Reset Block</b>						
Detecting voltage	V <sub>S</sub>	V <sub>IN</sub> =H→L	3.626	3.70	3.774	V
V <sub>s</sub> temperature coefficient *1	$\frac{\Delta V_S}{\Delta T}$	T <sub>j</sub> =-40~+85°C		100		ppm/°C
Hysteresis voltage	ΔV <sub>S</sub>	V <sub>IN</sub> =H→L→H	100		200	mV
Low level output voltage	V <sub>OL</sub>	V <sub>IN</sub> =V <sub>det</sub> =3.4V R <sub>L</sub> =4.7kΩ		100	200	mV
Output leakage current	I <sub>OH</sub>	V <sub>IN</sub> =V <sub>det</sub> =5V			±0.1	μA
Output current 1	I <sub>OL1</sub>	V <sub>IN</sub> =3.6V	5			mA
Output current 2 *1	I <sub>OL2</sub>	V <sub>IN</sub> =3.6V Ta=-20~+80°C	4			mA
H transmission delay time	t <sub>PLH</sub>	C <sub>d</sub> =OPEN		30	90	μs
Reset delay time *1	t <sub>PLH1</sub>	V <sub>det</sub> =3.2→4.2V, V <sub>IN</sub> =5V C <sub>d</sub> =0.022μF	5	10	20	ms
L transmission delay time *1	t <sub>PHL</sub>			30	90	μs
Threshold operating voltage	V <sub>OPL</sub>	V <sub>OL</sub> =0.4V		0.65	0.85	V

Note 1: \*1 The parameter is guaranteed by design.

Measuring Circuit

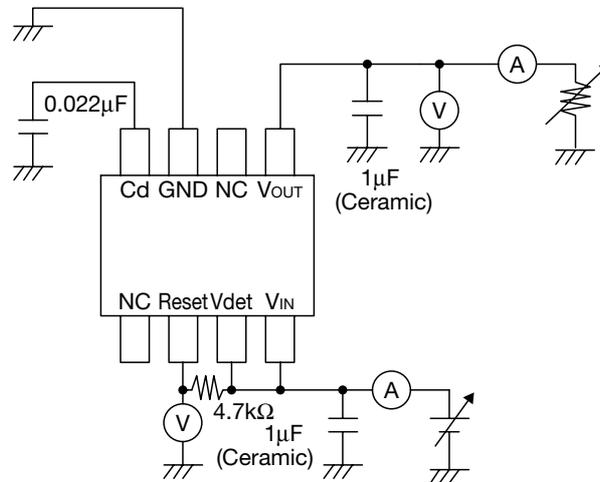

Application Circuit

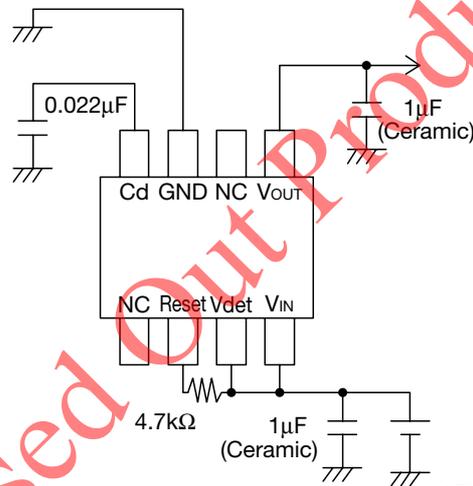


\*Temperature Characteristics: B Type

Note


1. The output capacitor is required between output and GND to prevent the oscillation.
2. The ESR of capacitor must be defined in ESR stability area.  
It is possible to use a ceramic capacitor without ESR resistance for output.  
The ceramic capacitor must be used more than 1µF and B type temperature characteristics.
3. The wire of V<sub>CC</sub> and GND is required to print full ground plane for noise and stability.
4. The input capacitor must be connected in 1cm from the input pin.
5. In case the output voltage is above the input voltage, the overcurrent flow by internal parasitic diode from output to input. In such application, the external bypass diode must be connected between output and input pin.

Timing Chart

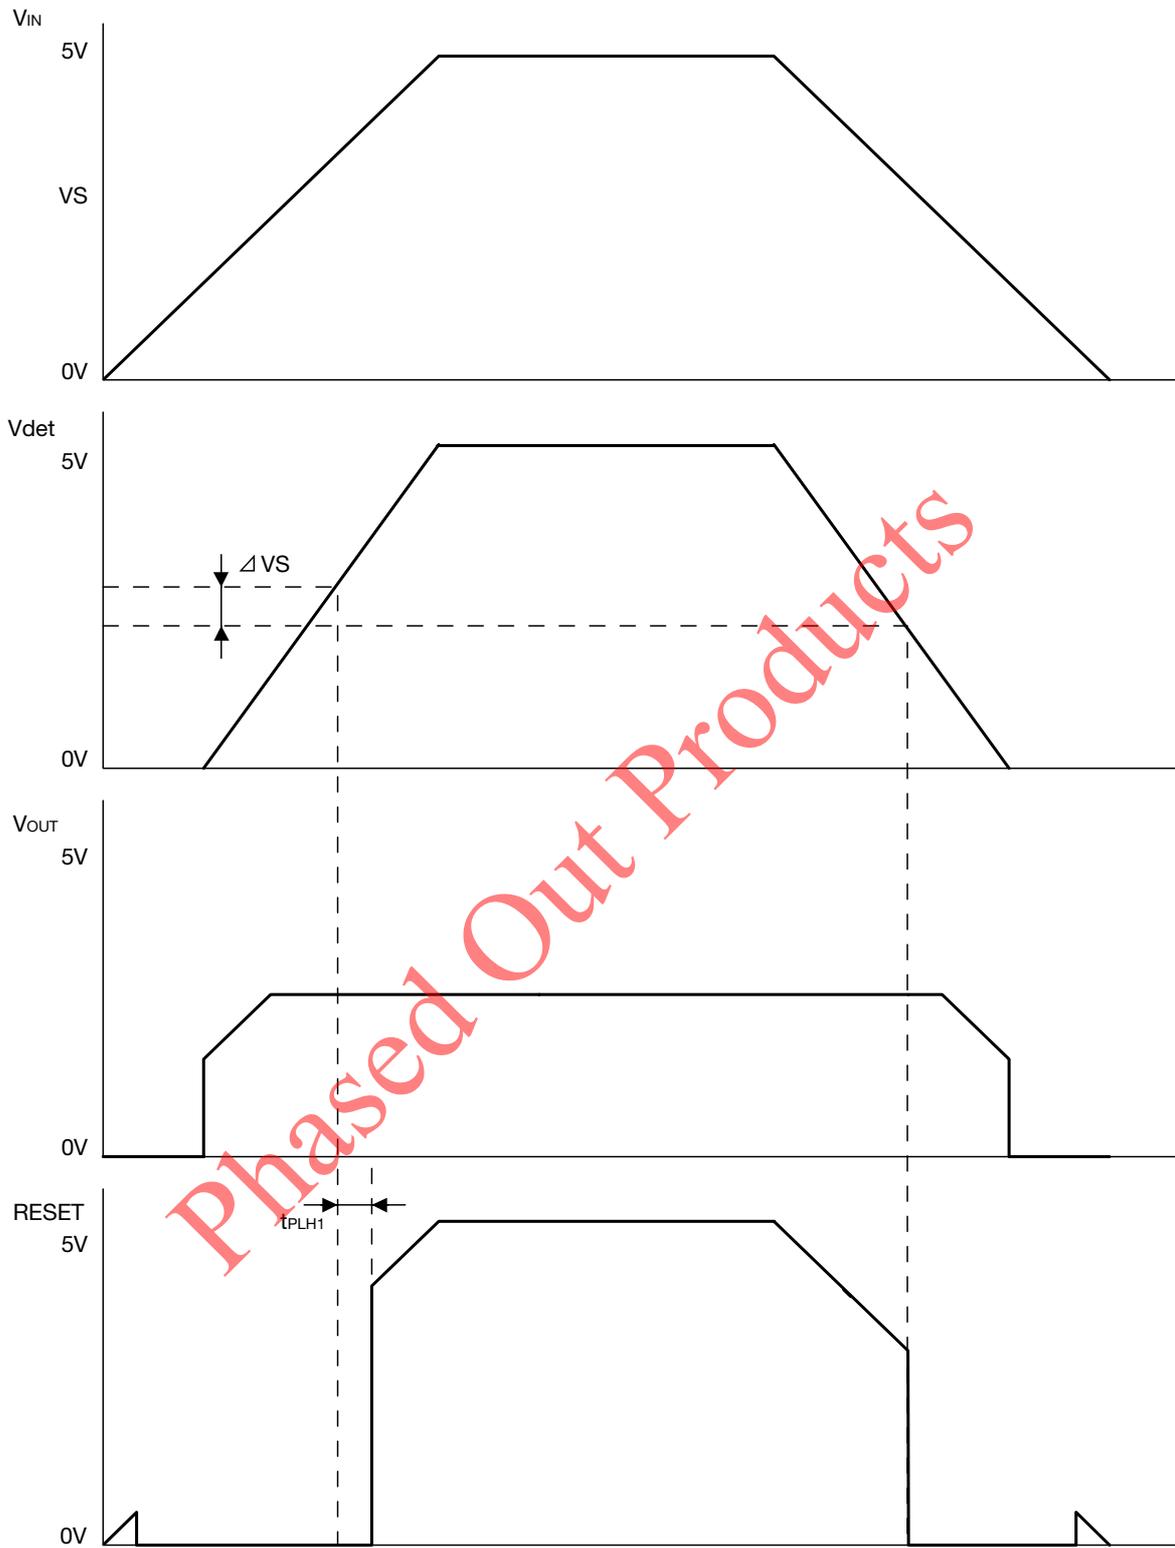


**Characteristics** (Except where noted otherwise,  $T_a=25^{\circ}\text{C}$ ,  $V_{\text{IN}}=5\text{V}$ ,  $C_{\text{IN}}=1\mu\text{F}$ ,  $C_o=1\mu\text{F}$ ,  $C_d=0.022\mu\text{F}$ )


**Output Voltage-Input Voltage**

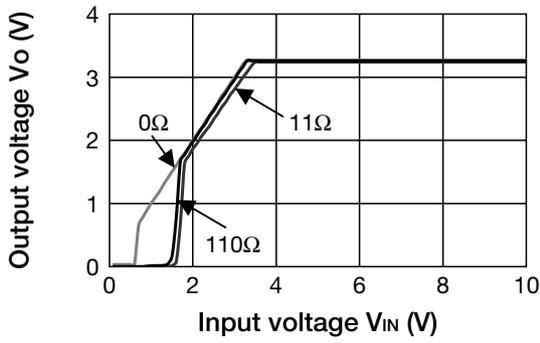


**Detecting Voltage**

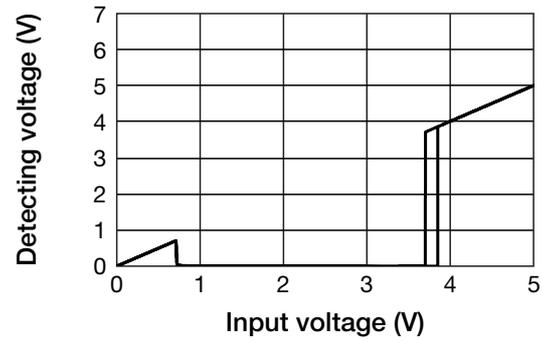


**Input current-Input Voltage**

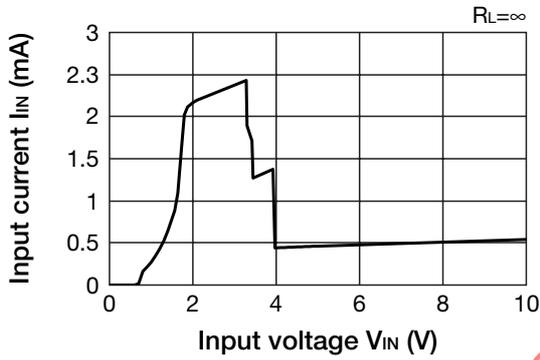


**Line Regulation  $V_o$**

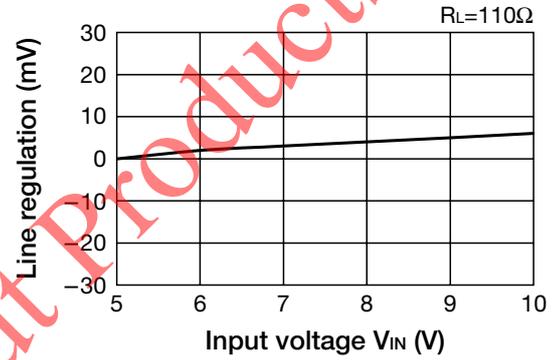


**Load Regulation  $V_o$**

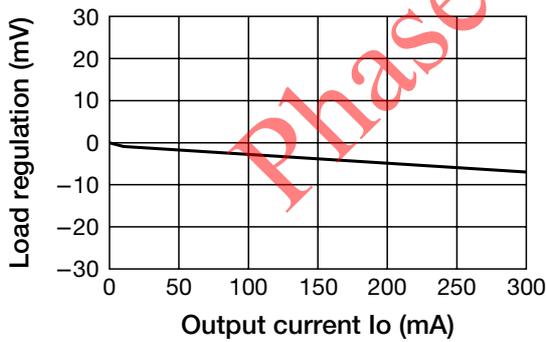


**Dropout Voltage  $V_o$ -Output Current**

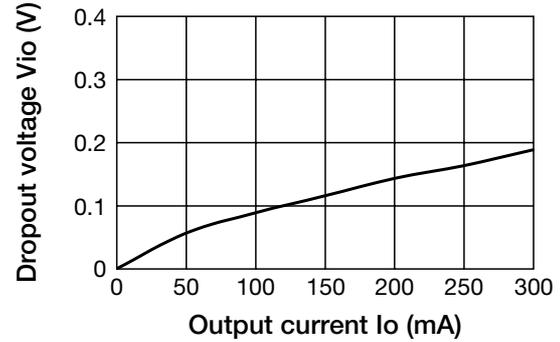


■ Output Voltage-Ambient Temperature

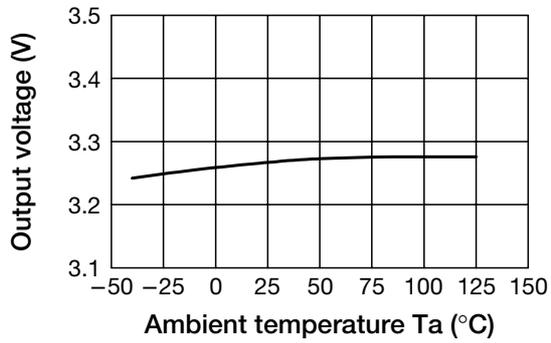


■ Detecting Voltage-Ambient Temperature

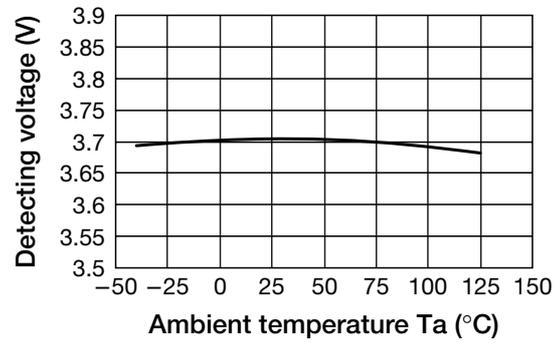

■ Ripple Rejection

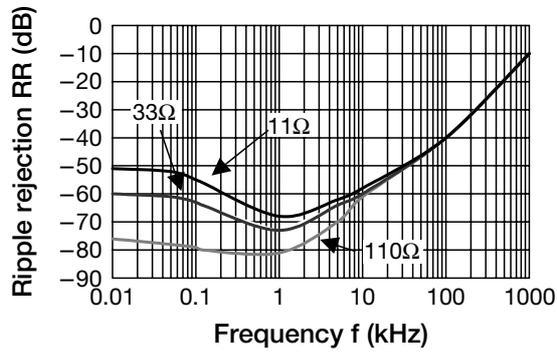

■ ESR Stable Area

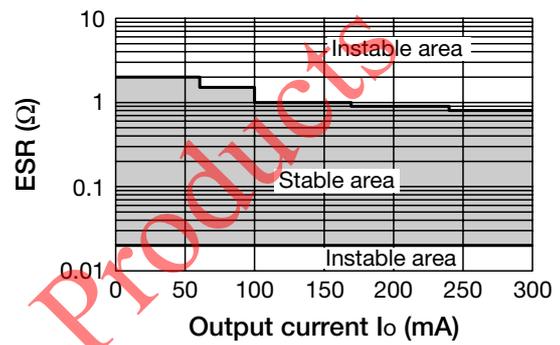

■ Load transient response (Io=0 → 300mA)

