



12A SERIES BI-DIRECTIONAL TRIODE THYRISTOR

DESCRIPTION

General purpose switching and phase control applications .These devices are intended to be interfaced directly to microcontrollers , logic integrated circuits and other low power gate trigger circuits such as fan speed and temperature modulation control , lighting control and static switching relay.

FEATURES

- Repetitive Peak off-State Voltage: 600V/800V
- R.M.S On-State Current($I_{T(RMS)}=12A$)
- Low on-state voltage: $V_{TM}=1.55(Max.)@ I_{TM}$
- Low reverse and forward blocking current:
- High Commutation dV/dt .

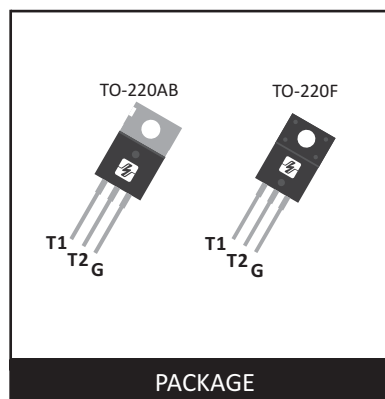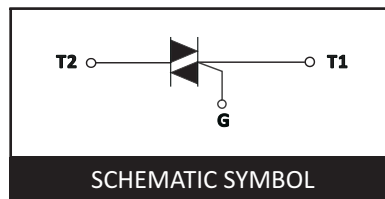

ABSOLUTE MAXIMUM RATINGS ($T_J = 25^{\circ}C$ UNLESS OTHERWISE SPECIFIED)

Symbol	Parameter	Condition	Ratings	Units
V_{DRM}	Repetitive Peak Off-State Voltage		600/800	V
V_{RRM}	Repetitive Peak Reverse Voltage		600/800	V
$I_{T(RMS)}$	R.M.S On-State Current	All Conduction Angle	12	A
I_{TSM}	Surge OnState Current	F=50Hz, $t_p=20ms$	120	A
I^2t	I^2t for Fusing	$t_p=10ms$	55	A ² S
dI/dt	Repetitive rate of rise of on-state current after triggering	$I_G=2I_{GT}$ F=100Hz $t_r \leq 100ns$	78	A/ μ S
P_{GM}	Forward Peak Gate Power Dissipation		5.0	W
$P_{G(AV)}$	Forward Average Gate Power Dissipation		1.0	W
I_{GM}	Peak Gate Current		4.0	A
T_J	Operating Junction Temperature		-40~125	$^{\circ}C$
T_{STG}	Storage Temperature		-40~150	$^{\circ}C$

ELECTRICAL CHARACTERISTICS ($T_C = 25\text{ }^{\circ}\text{C}$ UNLESS OTHERWISE NOTED)


Symbol	Items	Conditions		Ratings					Unit
				SW	CW	BW	C	B	
I _{DRM}	Repetitive Peak Off-State Current	V _D = V _{DRM}	T _C = 25 °C	≤5					μA
			T _C = 125 °C	≤1000					
V _{TM}	Peak On-State Voltage	I _{TM} = 14A		≤1.55					V
I _{GT}	Gate Trigger Current	V _D = 12V	I II III	≤10	≤25	≤50	≤25	≤50	mA
			IV	-	-	-	≤50	≤100	
V _{GT}	Gate Trigger Voltage	V _D = 12V		≤1.3					V
V _{GD}	Non-Trigger Gate Voltage	V _D = 2/3V _{DRM} , T _J = 125°C		≥0.2					V
dv/dt	Critical Rate of Rise Off-State Voltage	V _D = 2/3V _{DRM} , T _J = 125°C		≥40	≥200	≥1000	≥200	≥400	V/μS
I _H	Holding Current	I _T = 0.1A		≤15	≤35	≤50	≤25	≤50	mA
I _L	Latching current	I _G = 1.2I _{GT}	I III	≤25	≤50	≤70	≤40	≤50	mA
			II	≤30	≤60	≤80	≤80	≤100	
			IV	-	-	-	≤40	≤50	

PACKAGE MECHANICAL DATA

TO-220AB

Symbol	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	3.56	4.83	0.140	0.190
A1	2.03	2.92	0.080	0.115
b	0.38	1.02	0.015	0.040
b1	1.14	1.78	0.045	0.070
C	0.51	1.40	0.020	0.055
C1	0.36	0.61	0.014	0.024
D	9.65	10.67	0.380	0.420
E	14.22	16.51	0.560	0.650
e	2.54BSC		0.10BSC	
F	2.54	3.05	0.100	0.120
G	3.53	3.90	0.139	0.154
H	12.70	14.73	0.500	0.580
L	5.84	6.86	0.230	0.270
L1	-	6.35	-	0.250

TO-220F

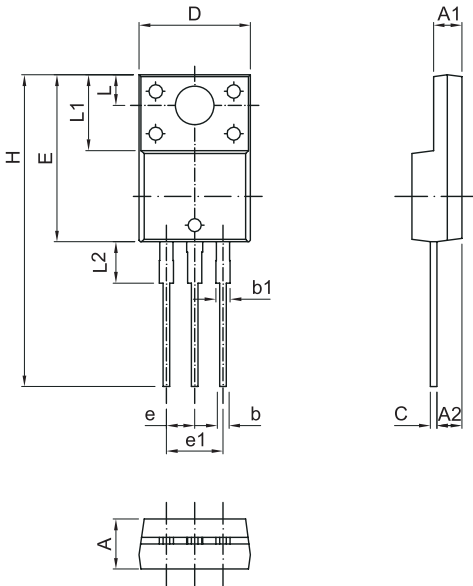	Symbol	Millimeters		Inches	
		Min.	Max.	Min.	Max.
	A	4.40	4.60	0.173	0.181
	A1	2.60	2.80	0.102	0.110
	A2	2.45	2.55	0.096	0.100
	b	0.50	0.75	0.020	0.030
	b1	1.10	1.40	0.043	0.055
	C	0.50	0.70	0.020	0.028
	D	9.70	10.30	0.382	0.406
	E	14.70	15.30	0.579	0.602
	e	2.54TYP		0.10TYP	
	e1	4.88	5.28	0.192	0.208
	H	27.40	28.60	1.079	1.126
	L	2.50	3.00	0.098	0.118
	L1	6.70	6.90	0.264	0.272
	L2	3.60	3.80	0.142	0.150

CONTACT US

Headquarters

A Building Caohejing I&E Park
Pujiang Minhang Shanghai
China

Web

<http://www.semiwill.com>

By Telephone

General: 86-21-34637654
Sales: 86-21-34637458
Customer Service: 86-21-34637172

By Email

Sales: sales@semiwill.com
Customer Service: cs@semiwill.com
Technical Support: fae@semiwill.com

By Fax

General: 86-21-34637173
Sales: 86-21-39650654

COPYRIGHT ©SEMIWILL 2009 - This literature is subject to all applicable copyright laws and is not for resale in any manner.

SPECIFICATIONS: SEMIWILL reserves the right to change the electrical and or mechanical characteristics described herein without notice.

DESIGN CHANGES: SEMIWILL reserves the right to discontinue product lines without notice and that the final judgement concerning selection and specifications is the buyer's and that in furnishing engineering and technical assistance. SEMIWILL assumes no responsibility with respect to the selection or specifications of such products. SEMIWILL makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SEMIWILL assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability without limitation special, consequential or incidental damages.

LIFE SUPPORT POLICY: SEMIWILL products are not authorized for use in life support systems without written consent from the factory.