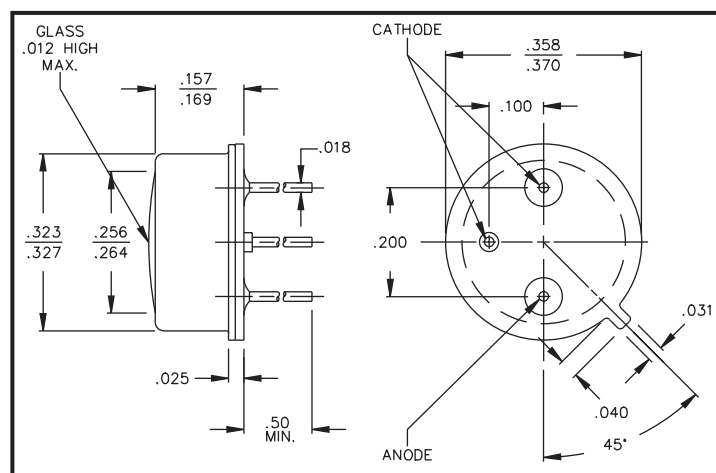


**FEATURES**

- TO-5 hermetic package
- Optimized die size for maximum signal
- Low capacitance

**ELECTRO-OPTICAL CHARACTERISTICS AT 25°C**

PARAMETERS	TEST CONDITIONS	MIN	TYP	MAX	UNITS
Active Area	6.27mm x 2.52mm		15.8		mm ²
Responsivity, $\mathcal{R}$	@ 450nm	0.20	0.28		A/W
Dark Current, I_{dr}	$V_R = 10V$		4	10	nA
Reverse Breakdown Voltage, V_R	$I_R = 10A$	25	60		Volts
Capacitance, C	$V_R = 10V$		30		pF
Rise Time	$V_R = 10V$		20		nsec
Series Resistance	$V_f = 1V$		35	100	Ohms

THERMAL PARAMETERS

Storage and Operating Temperature Range	-55°C TO 100°C
Maximum Junction Temperature	100°C
Lead Soldering Temperature ¹	260°

¹1/16" from case for 10 seconds.

