

# TOT-3301AsW-N

## Three Digit Display LED

Part Number	Chip		Face Color	Segment Color
	Material	Source Color		
TOT-3301AsW-N	InGaN	White	Gray	White


### Features

- (0.30") 8.0mm digit height
- Common Cathode
- I.C. compatible
- Low power requirement
- RoHS compliant

### Applications

- Audio equipment
- Instrument panels
- Digital read out display

### Package Dimensions & Internal Circuit Diagram

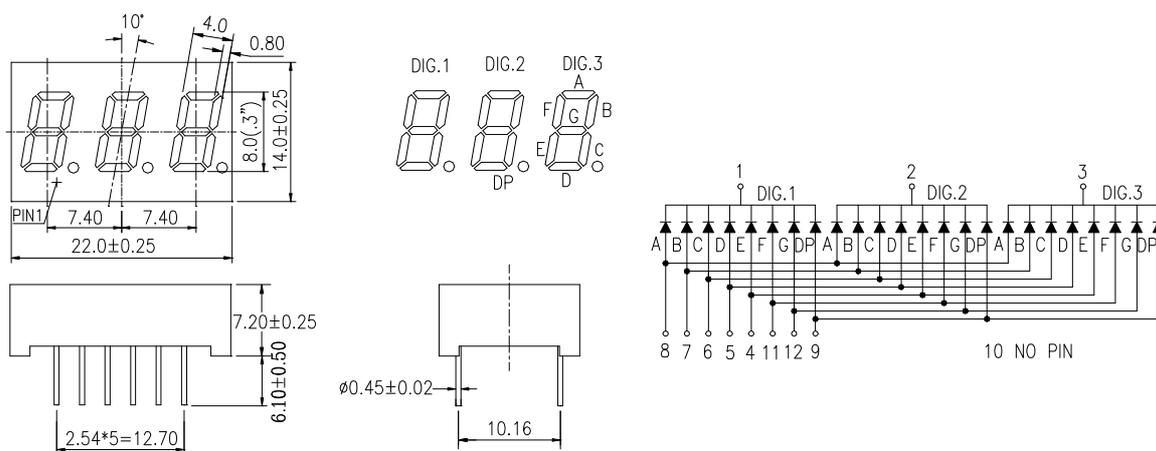

#### Notes:

1. All dimensions are in millimeters, tolerance:  $\pm 0.25$  ; Angle:  $\pm 0.1^\circ$  unless otherwise noted.
2. Specifications are subject to change without notice.

### Absolute Maximum Rating @ Ta=25°C

Parameter	Maximum Rating	Unit
Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width)	80	mA
Power Dissipation	105	mW
Continuous Forward Current	20	mA
Recommend Operating Current	12	mA
Reverse Voltage	5	V
Operating Temperature Range	-25°C to +85°C	
Storage Temperature Range	-30°C to +85°C	
Lead-Free Solder Temperature(1/16 Inch Below Seating Plane)	260°C for 3 Sec	

### Electrical / Optical Characteristic @ Ta=25°C

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Chromaticity Coordinates	X		0.290			I <sub>F</sub> =5mA
Chromaticity Coordinates	Y		0.285			I <sub>F</sub> =5mA
Forward Voltage	V <sub>F</sub>		3.5	4.0	V	I <sub>F</sub> =20mA
Reverse Current	I <sub>R</sub>			100	μA	V <sub>R</sub> =5V
Luminous Intensity Matching Rate	Iv-m			2.0:1		I <sub>F</sub> =20mA

The DISPLAYS should be kept at 30°C or less and 60%RH or less. The DISPLAYS should be used within one year.

[www.oasistek.com.tw](http://www.oasistek.com.tw)

Contact us : [service@oasistek.com.tw](mailto:service@oasistek.com.tw)

Catalogue : <http://goo.gl/6rcsV6>