

Features:

- High power metal alloy current sense resistor
- High temperature performance up to 225°C; for operation up to 275°C, contact factory
- Low thermal EMF (<1μV/C)
- Proprietary processing technique produces extremely low resistance values
- Qualified to AEC-Q200
- RoHS compliant, lead-free and halogen-free




Electrical Specifications - CSS						
Type / Code	Maximum Power Rating (Watts)	Maximum Rating Current (A)	Maximum Overload Current (A)	TCR (ppm/°C)	Ohmic Range (Ω) and Tolerance	
					0.5%	1%, 2%, 5%
CSS0603	0.33	9.08	18.16	±75ppm/°C	-	0.004
		8.1	16.2	±50 ppm/°C	-	0.005, 0.01, 0.015
CSS0805	0.5	12.9	25.8	±75ppm/°C	-	0.003
		12.9	25.8	±50 ppm/°C	-	0.005, 0.01, 0.015
CSS1206	1	31.62	63.25	±50 ppm/°C	-	0.001 - 0.004
				±25 ppm/°C	0.007 - 0.015	0.005 - 0.015
				±15 ppm/°C	0.016 - 0.05	0.016 - 0.05
CSS2010	1	31.62	63.25	±50 ppm/°C	-	0.001 - 0.003
				±25 ppm/°C	-	0.004 - 0.006
				±15 ppm/°C	0.007 - 0.1	0.007 - 0.1
CSS2512	2	63.25	141.42	±50 ppm/°C	-	0.0005 - 0.003
				±25 ppm/°C	-	0.004 - 0.006
				±15 ppm/°C	0.007 - 0.075	0.007 - 0.075
CSS2725	4	126.49	316.23	±100 ppm/°C	-	0.0002
				±50 ppm/°C	-	0.00025 - 0.003
CSS2728	3	27.39	61.24	±25 ppm/°C	0.004 - 0.007	0.004 - 0.007
				±15 ppm/°C	0.008 - 0.19	0.008 - 0.1
CSS4527	5	100	173	±50 ppm/°C	0.007 - 0.12	0.0005 - 0.12


Electrical Specifications – CSSH (High Power)						
Type / Code	Maximum Power Rating (Watts)	Maximum Rating Current (A)	Maximum Overload Current (A)	TCR (ppm/°C)	Ohmic Range (Ω) and Tolerance	
					0.5%	1%, 2%, 5%
CSSH2512	3	77.46	134.16	±150 ppm/°C	-	0.0003
				±50 ppm/°C	-	0.0005 - 0.0025
				±25 ppm/°C	0.007 - 0.01	0.003 - 0.01
				±50 ppm/°C	0.0101 - 0.05	0.0101 - 0.08
CSSH2728	4	31.62	70.71	±25 ppm/°C	0.004 - 0.007	0.004 - 0.007
				±15 ppm/°C	0.008 - 0.019	0.008 - 0.05

Please refer to the High Power Resistor Application Note (page 8) for more information on designing and implementing high power resistor types.


Mechanical Specifications



Type / Code	Maximum Power Rating (Watts)	Resistance Range (Ω)	L	W	H	T1 Bottom Termination	Unit
CSS0603	0.33	0.004, 0.005 0.01, 0.015	0.063 ± 0.008 1.60 ± 0.20	0.031 ± 0.008 0.80 ± 0.20	0.010 ± 0.004 0.25 ± 0.10	0.012 ± 0.006 0.30 ± 0.15	inches mm




Type / Code	Maximum Power Rating (Watts)	Resistance Range (Ω)	L	W	H	T1 Bottom Termination	T2 Top Termination	Unit
CSS0805	0.5	0.003, 0.005 0.01, 0.015	0.080 ± 0.008 2.03 ± 0.20	0.050 ± 0.008 1.27 ± 0.20	0.012 ± 0.004 0.30 ± 0.10	0.014 ± 0.008 0.35 ± 0.20	0.008 ± 0.006 0.20 ± 0.15	inches mm




Type / Code	Maximum Power Rating (Watts)	Resistance Range (Ω)	L	W	H	T1 Bottom Termination	T2 Top Termination	Unit
CSS1206	1	0.001	0.126 ± 0.010 3.20 ± 0.25	0.063 ± 0.010 1.60 ± 0.25	0.025 ± 0.010 0.65 ± 0.25	0.020 ± 0.010 0.51 ± 0.25	0.020 ± 0.010 0.51 ± 0.25	inches mm
CSS1206		0.002 - 0.004	0.126 ± 0.010 3.20 ± 0.25	0.063 ± 0.010 1.60 ± 0.25	0.022 ± 0.010 0.55 ± 0.25	0.020 ± 0.010 0.51 ± 0.25	0.020 ± 0.010 0.51 ± 0.25	inches mm
CSS1206		0.005	0.126 ± 0.010 3.20 ± 0.25	0.063 ± 0.010 1.60 ± 0.25	0.022 ± 0.010 0.55 ± 0.25	0.024 ± 0.010 0.60 ± 0.25	0.024 ± 0.010 0.60 ± 0.25	inches mm
CSS1206		0.006 - 0.05	0.126 ± 0.010 3.20 ± 0.25	0.063 ± 0.010 1.60 ± 0.25	0.022 ± 0.010 0.55 ± 0.25	0.020 ± 0.010 0.51 ± 0.25	0.020 ± 0.010 0.51 ± 0.25	inches mm
CSS2010	1	0.001 - 0.003	0.200 ± 0.010 5.08 ± 0.25	0.100 ± 0.010 2.54 ± 0.25	0.031 ± 0.010 0.79 ± 0.25	0.051 ± 0.010 1.30 ± 0.25	0.051 ± 0.010 1.30 ± 0.25	inches mm
CSS2010		0.0031 - 0.1	0.200 ± 0.010 5.08 ± 0.25	0.100 ± 0.010 2.54 ± 0.25	0.025 ± 0.010 0.65 ± 0.25	0.031 ± 0.010 0.79 ± 0.25	0.031 ± 0.010 0.79 ± 0.25	inches mm
CSS2512	2	0.0005 - 0.004	0.246 ± 0.010 6.25 ± 0.25	0.126 ± 0.010 3.20 ± 0.25	0.031 ± 0.010 0.79 ± 0.25	0.074 ± 0.010 1.88 ± 0.25	0.074 ± 0.010 1.88 ± 0.25	inches mm
CSS2512		0.0041 - 0.075	0.246 ± 0.010 6.25 ± 0.25	0.126 ± 0.010 3.20 ± 0.25	0.025 ± 0.010 0.65 ± 0.25	0.044 ± 0.010 1.12 ± 0.25	0.044 ± 0.010 1.12 ± 0.25	inches mm
CSSH2512	3	0.0005	0.246 ± 0.010 6.25 ± 0.25	0.126 ± 0.010 3.20 ± 0.25	0.031 ± 0.010 0.79 ± 0.25	0.074 ± 0.010 1.88 ± 0.25	0.074 ± 0.010 1.88 ± 0.25	inches mm
CSSH2512		0.0006 - 0.0029	0.246 ± 0.010 6.25 ± 0.25	0.126 ± 0.010 3.20 ± 0.25	0.031 ± 0.010 0.79 ± 0.25	0.044 ± 0.010 1.12 ± 0.25	0.044 ± 0.010 1.12 ± 0.25	inches mm
CSSH2512		0.003	0.246 ± 0.010 6.25 ± 0.25	0.126 ± 0.010 3.20 ± 0.25	0.031 ± 0.010 0.79 ± 0.25	0.074 ± 0.010 1.88 ± 0.25	0.074 ± 0.010 1.88 ± 0.25	inches mm
CSSH2512		0.0031 - 0.004	0.246 ± 0.010 6.25 ± 0.25	0.126 ± 0.010 3.20 ± 0.25	0.031 ± 0.010 0.79 ± 0.25	0.066 ± 0.010 1.68 ± 0.25	0.066 ± 0.010 1.68 ± 0.25	inches mm
CSSH2512		0.0041 - 0.01	0.246 ± 0.010 6.25 ± 0.25	0.126 ± 0.010 3.20 ± 0.25	0.026 ± 0.010 0.65 ± 0.25	0.044 ± 0.010 1.12 ± 0.25	0.044 ± 0.010 1.12 ± 0.25	inches mm

Mechanical Specifications (cont.)




Type / Code	Maximum Power Rating (Watts)	Resistance Range (Ω)	L	W	H	T1 Bottom Termination	T2 Top Termination	Unit
CSS2725	4	0.00025, 0.0005	0.268 \pm 0.010 6.81 \pm 0.25	0.254 \pm 0.010 6.45 \pm 0.25	0.039 \pm 0.010 0.99 \pm 0.25	0.085 \pm 0.010 2.16 \pm 0.25	0.085 \pm 0.010 2.16 \pm 0.25	inches mm
		0.001	0.268 \pm 0.010 6.81 \pm 0.25	0.254 \pm 0.010 6.45 \pm 0.25	0.043 \pm 0.010 1.09 \pm 0.25	0.085 \pm 0.010 2.16 \pm 0.25	0.085 \pm 0.010 2.16 \pm 0.25	inches mm
		0.0015	0.268 \pm 0.010 6.81 \pm 0.25	0.254 \pm 0.010 6.45 \pm 0.25	0.039 \pm 0.010 0.99 \pm 0.25	0.085 \pm 0.010 2.16 \pm 0.25	0.085 \pm 0.010 2.16 \pm 0.25	inches mm
		0.002	0.268 \pm 0.010 6.81 \pm 0.25	0.254 \pm 0.010 6.45 \pm 0.25	0.035 \pm 0.010 0.89 \pm 0.25	0.071 \pm 0.010 1.80 \pm 0.25	0.071 \pm 0.010 1.80 \pm 0.25	inches mm
		0.0025	0.268 \pm 0.010 6.81 \pm 0.25	0.254 \pm 0.010 6.45 \pm 0.25	0.035 \pm 0.010 0.89 \pm 0.25	0.065 \pm 0.010 1.65 \pm 0.25	0.065 \pm 0.010 1.65 \pm 0.25	inches mm
		0.003	0.268 \pm 0.010 6.81 \pm 0.25	0.254 \pm 0.010 6.45 \pm 0.25	0.035 \pm 0.010 0.89 \pm 0.25	0.051 \pm 0.010 1.30 \pm 0.25	0.051 \pm 0.010 1.30 \pm 0.25	inches mm
CSS2728	3	0.004 - 0.1	0.264 \pm 0.010 6.71 \pm 0.25	0.283 \pm 0.010 7.19 \pm 0.25	0.039 \pm 0.010 0.99 \pm 0.25	0.045 \pm 0.010 1.14 \pm 0.25	0.045 \pm 0.010 1.14 \pm 0.25	inches mm
CSSH2728	4	0.004 - 0.1	0.264 \pm 0.010 6.71 \pm 0.25	0.283 \pm 0.010 7.19 \pm 0.25	0.039 \pm 0.010 0.99 \pm 0.25	0.045 \pm 0.010 1.14 \pm 0.25	0.045 \pm 0.010 1.14 \pm 0.25	inches mm

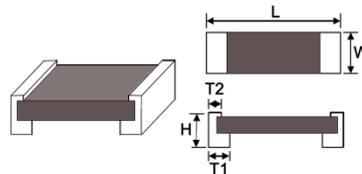


Type / Code	Maximum Power Rating (Watts)	Resistance Range (Ω)	L	W	H	T1 Bottom Termination	T2 Top Termination	Unit
CSS4527	5	0.0005 - 0.005	0.450 \pm 0.010 11.43 \pm 0.25	0.270 \pm 0.010 6.85 \pm 0.25	0.059 \pm 0.010 1.50 \pm 0.25	0.127 \pm 0.010 3.22 \pm 0.25	0.038 \pm 0.010 0.97 \pm 0.25	inches mm
		0.0051 - 0.1	0.450 \pm 0.010 11.43 \pm 0.25	0.270 \pm 0.010 6.85 \pm 0.25	0.059 \pm 0.010 1.50 \pm 0.25	0.071 \pm 0.010 1.82 \pm 0.25	0.038 \pm 0.010 0.97 \pm 0.25	inches mm

Recommended Pad Layouts




Type / Code	Maximum Power Rating (Watts)	Resistance Range (Ω)	a	b	i	Unit
CSS0603	0.33	0.005, 0.01, 0.015	0.039 1.00	0.050 1.27	0.020 0.50	inches mm
CSS0805	0.5	0.005, 0.01, 0.015	0.071 1.80	0.086 2.18	0.026 0.66	inches mm
CSS1206	1	0.001 - 0.05	0.063 1.60	0.086 2.18	0.039 1.00	inches mm

Recommended Pad Layouts



Type / Code	Maximum Power Rating (Watts)	Resistance Range (Ω)	a	b	i	Unit
CSS2010	1	0.001 - 0.003	0.114 2.89	0.115 2.92	0.048 1.22	inches mm
		0.0031 - 0.1	0.090 2.29	0.115 2.92	0.095 2.41	inches mm
CSS2512	2	0.0005 - 0.004	0.120 3.05	0.145 3.68	0.050 1.27	inches mm
		0.0041 - 0.075	0.083 2.11	0.145 3.68	0.125 3.18	inches mm
CSSH2512	3	0.0005	0.120 3.05	0.145 3.68	0.050 1.27	inches mm
		0.0006 - 0.0029	0.086 2.19	0.145 3.68	0.118 3.00	inches mm
		0.0041 - 0.01	0.110 2.79	0.145 3.68	0.071 1.80	inches mm
CSS2725	4	0.00025 - 0.003	0.125 3.18	0.270 6.86	0.052 1.32	inches mm
CSS2728	3	0.004 - 0.1	0.108 2.75	0.308 7.82	0.138 3.51	inches mm
CSSH2728	4	0.004 - 0.1	0.108 2.75	0.308 7.82	0.138 3.51	inches mm
CSS4527	5	0.0005 - 0.005	0.189 4.80	0.344 8.74	0.217 5.51	inches mm
		0.0051 - 0.12	0.134 3.40	0.344 8.74	0.327 8.31	inches mm

Power Derating Curve:


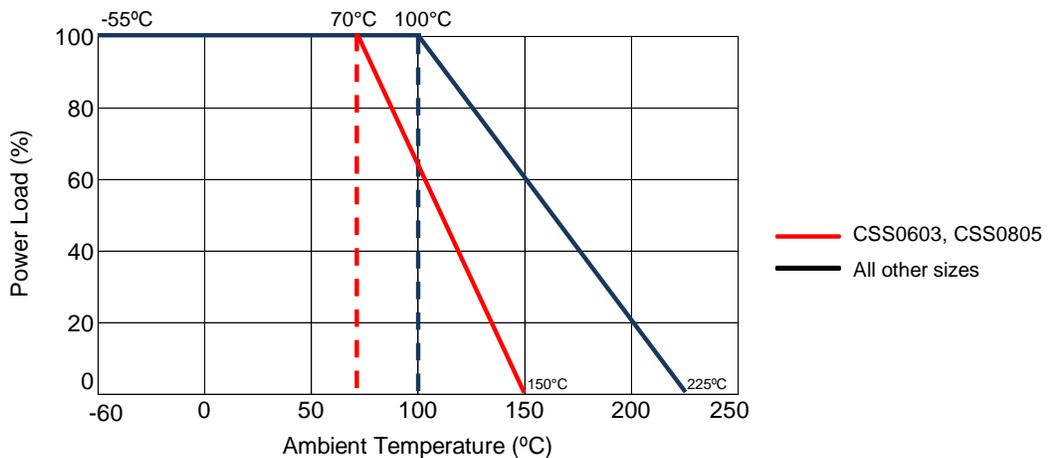


Performance Characteristics																												
Test	Test Method	Test Specification	Test Condition																									
Temperature Coefficient of Resistance (TCR)	JIS-C-5201-1 4.8	Per specification (refer to Electrical Specification table)	$TCR (ppm/^{\circ}C) = \frac{(R2-R1)}{R1 (T2-T1)} \times 10^6$ R1: resistance of room temperature (T1) R2: resistance of 150°C (T2) T1: room temperature T2: temperature at 150°C																									
Short Time Overload	JIS-C-5201-1 4.13	$\leq \pm 0.5\%$ $\leq \pm 2\% (4527)$	Applied overload for 5 seconds and release the load for about 30 minutes, then measure its resistance variance rate. <table border="1" style="margin-left: 20px;"> <thead> <tr> <th>Size</th> <th>Power (W)</th> <th>Rated Power</th> </tr> </thead> <tbody> <tr> <td>CSS0603</td> <td>0.33</td> <td rowspan="2">4 times</td> </tr> <tr> <td>CSS0805</td> <td>0.5</td> </tr> <tr> <td>CSS1206</td> <td>1</td> <td rowspan="6">5 times</td> </tr> <tr> <td>CSS2010</td> <td>1</td> </tr> <tr> <td>CSS2512</td> <td>2</td> </tr> <tr> <td>CSSH2512</td> <td>3</td> </tr> <tr> <td>CSS2725</td> <td>4</td> </tr> <tr> <td>CSS2728</td> <td>3</td> </tr> <tr> <td>CSSH2728</td> <td>4</td> </tr> <tr> <td>CSS4527</td> <td>5</td> </tr> </tbody> </table>	Size	Power (W)	Rated Power	CSS0603	0.33	4 times	CSS0805	0.5	CSS1206	1	5 times	CSS2010	1	CSS2512	2	CSSH2512	3	CSS2725	4	CSS2728	3	CSSH2728	4	CSS4527	5
Size	Power (W)	Rated Power																										
CSS0603	0.33	4 times																										
CSS0805	0.5																											
CSS1206	1	5 times																										
CSS2010	1																											
CSS2512	2																											
CSSH2512	3																											
CSS2725	4																											
CSS2728	3																											
CSSH2728	4																											
CSS4527	5																											
Insulation Resistance	JIS-C-5201-1 4.6	$\geq 10^9 \Omega$	Put the resistor in the fixture, add 100 VDC in terminal for 60 seconds then measure the insulation resistance between electrodes and insulating enclosure or between electrodes and base material																									
Dielectric Withstanding Voltage	JIS-C-5201-1 4.7	No short or burned in the appearance.	Applied 500 VAC for 1 minute and limit surge current 50 mA (max)																									

Operating Temperature Range for sizes 0603 and 0805: -55°C to +150°C. Contact factory for operation at higher temperatures.


Operating Temperature Range for all other sizes: -55°C to +225°C. Contact factory for operation at higher temperatures.

Mechanical Performance			
Test Item	Test Method	Test Specifications	Test Condition
Resistance to Solder Heat	JIS C 5201-1 4.18	$\leq \pm 0.5\%$	The tested resistor is immersed 25 mm/sec into molten solder of 260±5°C for 10±1 seconds. Then the resistor is left in the room for 1 hour and measured its resistance variance rate.
		No evidence of mechanical damage	
Solderability	JIS C 5201-1 4.17	Solder coverage over 95%	Add flux into tested resistors, immerse into solder bath in temperature 245±5°C for 3±0.5 seconds.
Core Body Strength	JIS C 5201-1 4.15	$\leq \pm 0.5\%$	Apply R0.5 test probe at its central part then push 5N force on the sample for 10 seconds.
		No evidence of mechanical damage	

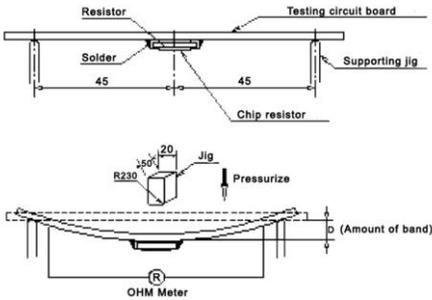Mechanical Performance (cont.)			
Test Item	Test Method	Test Specifications	Test Condition
Joint Strength of Solder	JIS C 5201-1 4.32	<p>Test item 1:</p> <p>1. $\leq \pm 0.5\%$</p> <p>2. No evidence of mechanical damage</p> <p>No peeling off.</p>	<p>Preconditioning:</p> <p>Put tested resistor in the apparatus of PCT, at a temperature of 105 °C, humidity of 100% R.H., and pressure of 1.22×10^5 Pa for a duration of 4 hours. Then leave the specimen in a temperature for 2 hours or more.</p> <p>Test Item 1 (Adhesion):</p> <p>A static load using a R0.5 scratch tool shall be applied on the core of the component and in the direction of the arrow and held for 10 seconds and under load measured its resistance variance rate. Load: 17:7N</p>  <p style="text-align: center;">Cross-sectional View</p> <p style="text-align: center;">Scratching jig</p> <p style="text-align: center;">R 0.5</p> <p style="text-align: center;">Specimen</p>
	JIS C 5201-1 4.33	<p>Test item 2:</p> <p>1. $\leq \pm 0.5\%$</p> <p>2. No evidence of mechanical damage</p> <p>No terminal peeling off and no core body cracked.</p>	<p>Test item 2 (Bending Strength):</p> <p>Solder tested resistor on to PC board, add force in the middle down, and under load measured its resistance variance rate.</p> <p>D: 2mm</p>  <p style="text-align: center;">Resistor</p> <p style="text-align: center;">Testing circuit board</p> <p style="text-align: center;">Solder</p> <p style="text-align: center;">45</p> <p style="text-align: center;">45</p> <p style="text-align: center;">Supporting jig</p> <p style="text-align: center;">Chip resistor</p> <p style="text-align: center;">20</p> <p style="text-align: center;">R230</p> <p style="text-align: center;">Jig</p> <p style="text-align: center;">Pressurize</p> <p style="text-align: center;">OHM Meter</p> <p style="text-align: center;">(Amount of band)</p>
Resistance to Solvent	JIS C 5201-1 4.29	<p>$\leq \pm 0.5\%$</p> <p>No evidence of mechanical damage</p>	<p>The tested resistor is immersed into isopropyl alcohol of 20–25 °C for 60 seconds, then the resistor is left in the room for 48 hours.</p>
Vibration	JIS C 5201-1 4.22	<p>$\leq \pm 0.5\%$</p> <p>No evidence of mechanical damage</p>	<p>The resistor shall be mounted by its terminal leads to the supporting terminals on the solid table.</p> <p>The entire frequency range from 10 Hz to 55 Hz and return to 10 Hz, shall be transferred in 1 minute. Amplitude: 1.5mm This motion shall be applied for a period of 4 hours in each 3 mutually perpendicular directions (a total of 12 hours)</p>

Environmental Performance											
Test Item	Test Method	Test Specifications	Test Condition								
Low Temperature Exposure (Storage)	JIS C 5201-1 4.23.4	$\leq \pm 0.5\%$	Put tested resistor in chamber under temperature $-55 \pm 2^\circ\text{C}$ for 1,000 hours. then leave the tested resistor in room temperature for 60 minutes and measure its resistance variance rate.								
		No evidence of mechanical damage.									
High Temperature Exposure (Storage)	JIS C 5201-1 4.23.2	$\leq \pm 1\%$	Put tested resistor in chamber under temperature $170 \pm 5^\circ\text{C}$ for 1,000 hours. Then leave the tested resistor in room temperature for 60 minutes and measure its resistance variance rate.								
		No evidence of mechanical damage.									
Temperature Cycling (Rapid Temperature Change)	JESD 22-A 104	$\leq \pm 0.5\%$	Put tested resistor in chamber under the temperature cycling which is shown in the following table. It shall be repeated 1,000 times consecutively. Then leave the tested resistor in room temperature for 60 minutes and measure its resistance variance rate.								
		No evidence of mechanical damage.									
		<table border="1"> <thead> <tr> <th>Test Item</th> <th>Test Condition</th> </tr> </thead> <tbody> <tr> <td>Lowest temperature</td> <td>$-55 +0/-10^\circ\text{C}$</td> </tr> <tr> <td>Highest temperature</td> <td>$150 + 10/-0^\circ\text{C}$</td> </tr> <tr> <td>Dwell time</td> <td>30 minutes max.</td> </tr> </tbody> </table>		Test Item	Test Condition	Lowest temperature	$-55 +0/-10^\circ\text{C}$	Highest temperature	$150 + 10/-0^\circ\text{C}$	Dwell time	30 minutes max.
Test Item	Test Condition										
Lowest temperature	$-55 +0/-10^\circ\text{C}$										
Highest temperature	$150 + 10/-0^\circ\text{C}$										
Dwell time	30 minutes max.										
Moisture Resistance (Climatic Sequence)	MIL-STD 202 Method 106	$\leq \pm 0.5\%$	Put tested resistor in chamber and subject to 10 cycles of damp heat and without power. Each one of which consists of the steps 1 to 7 (Figure 1). Then leave the tested resistor in room temperature for 24 hours and measure its resistance variance rate.								
		No evidence of mechanical damage.									

Figure 1:

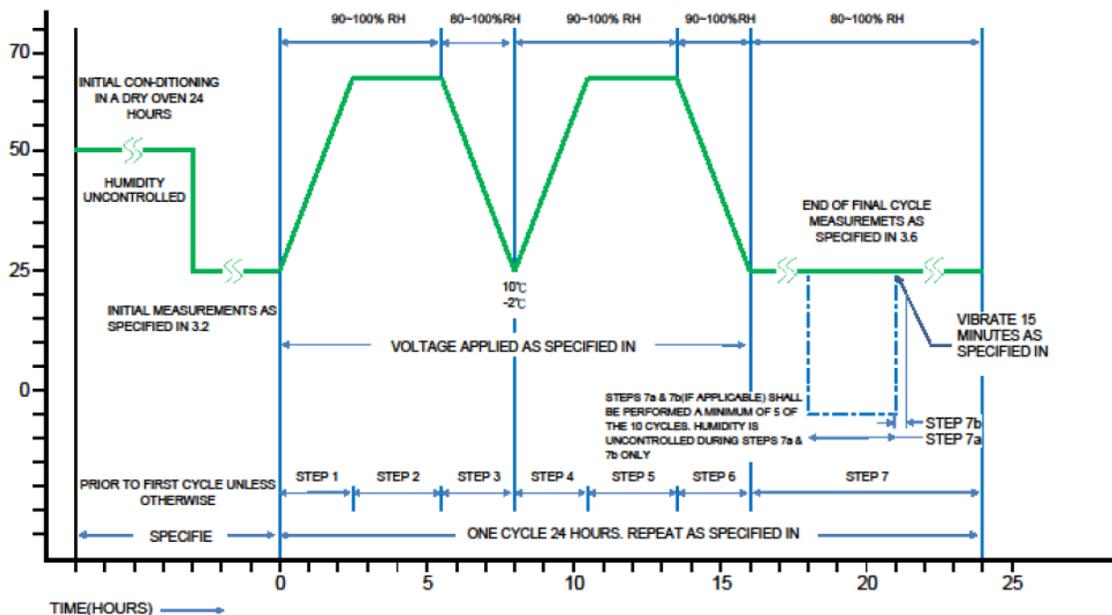


Bias Humidity	JIS C 5201-1 4.24	$\leq \pm 0.5\%$	Put tested resistor in chamber under $85 \pm 5^\circ\text{C}$ and $85 \pm 5\%$ R.H. with 10% bias and load the rated current for 90 minutes "ON" and 30 minutes "OFF" total 1,000 hours. Then leave the tested resistor in room temperature for 60 minutes, and measure its resistance variance rate.
		No evidence of mechanical damage.	

Environmental Performance (cont.)										
Test Item	Test Method	Test Specifications	Test Condition							
Whisker Test	JESD Standard No.22A121 class 2	Max 50 μ m	Test item (Thermal Shock Test):							
			<table border="1"> <thead> <tr> <th colspan="2">Testing Condition</th> </tr> </thead> <tbody> <tr> <td>Minimum Storage Temperature</td> <td>-55 +0/-10 °C</td> </tr> <tr> <td>Maximum Storage Temperature</td> <td>85 + 10/-0 °C</td> </tr> <tr> <td>Temperature-Retaining Time</td> <td>10 minutes</td> </tr> <tr> <td>Number of Temperature Cycles</td> <td>1,500</td> </tr> </tbody> </table>	Testing Condition		Minimum Storage Temperature	-55 +0/-10 °C	Maximum Storage Temperature	85 + 10/-0 °C	Temperature-Retaining Time
Testing Condition										
Minimum Storage Temperature	-55 +0/-10 °C									
Maximum Storage Temperature	85 + 10/-0 °C									
Temperature-Retaining Time	10 minutes									
Number of Temperature Cycles	1,500									
Load Life	JIS C 5201-1 4.25	$\leq \pm 1\%$	Put the tested resistor in chamber under temperature 70 ± 2 °C and load the rated current for 90 minutes "ON", and 30 minutes "OFF", for a total of 1,000 hours. Then leave the tested resistor in room temperature for 60 minutes and measure its resistance variance rate.							
		$\leq \pm 2\%$ (4527 size)								
		No evidence of mechanical damage.								

High Power Chip Resistors and Thermal Management

Stackpole has developed several surface mount resistor series in addition to our current sense resistors, which have had higher power ratings than standard resistor chips. This has caused some uncertainty and even confusion by users as to how to reliably use these resistors at the higher power ratings in their designs.

The data sheets for the RHC, RMCP, RNCP, CSR, CSRN, CSRF, CSS, and CSSH state that the rated power assumes an ambient temperature of no more than 100°C for the CSS / CSSH series and 70°C for all other high power resistor series. In addition, IPC and UL best practices dictate that the combined temperature on any resistor due to power dissipated and ambient air shall be no more than 105°C. At first glance this wouldn't seem too difficult, however the graph below shows typical heat rise for the CSR 1/2 100 milliohm at full rated power. The heat rise for the RMCP and RNCP would be similar. The RHC with its unique materials, design, and processes would have less heat rise and therefore would be easier to implement for any given customer.

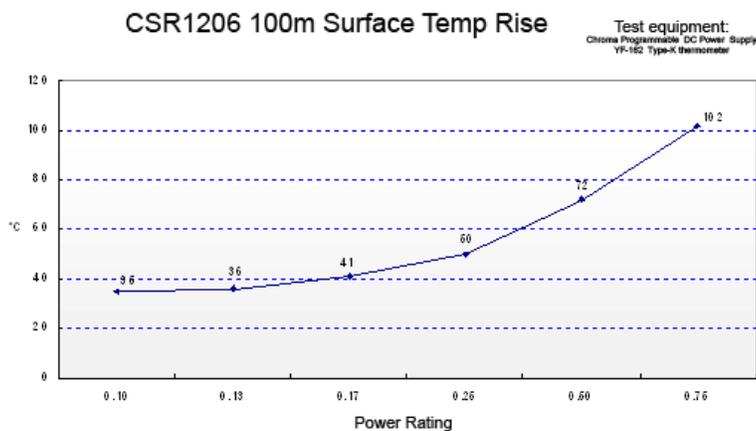

The 102°C heat rise shown here would indicate there will be additional thermal reduction techniques needed to keep this part under 105°C total hot spot temperature if this part is to be used at 0.75 watts of power. However, this same part at the usual power rating for this size would have a heat rise of around 72°C. This additional heat rise may be dealt with using wider conductor traces, larger solder pads and land patterns under the solder mask, heavier copper in the conductors, via through PCB, air movement, and heat sinks, among many other techniques. Because of the variety of methods customers can use to lower the effective heat rise of the circuit, resistor manufacturers simply specify power ratings with the limitations on ambient air temperature and total hot spot temperatures and leave the details of how to best accomplish this to the design engineers. Design guidelines for products in various market segments can vary widely so it would be unnecessarily constraining for a resistor manufacturer to recommend the use of any of these methods over another.

Note: The final resistance value can be affected by the board layout and assembly process, especially the size of the mounting pads and the amount of solder used. This is especially notable for resistance values $\leq 50m\Omega$. This should be taken into account when designing.

RoHS Compliance

Stackpole Electronics has joined the worldwide effort to reduce the amount of lead in electronic components and to meet the various regulatory requirements now prevalent, such as the European Union’s directive regarding “Restrictions on Hazardous Substances” (RoHS 3). As part of this ongoing program, we periodically update this document with the status regarding the availability of our compliant components. All our standard part numbers are compliant to EU Directive 2011/65/EU of the European Parliament as amended by Directive (EU) 2015/863/EU as regards the list of restricted substances.

RoHS Compliance Status						
Standard Product Series	Description	Package / Termination Type	Standard Series RoHS Compliant	Lead-Free Termination Composition	Lead-Free Mfg. Effective Date (Std Product Series)	Lead-Free Effective Date Code (YY/WW)
CSS	Ultra Precision Current Sensing Chip Resistor	SMD	YES	100% Matte Sn over Ni	Always	Always
CSSH	Ultra Precision Current Sensing Chip Resistor (High Power)	SMD	YES	100% Matte Sn over Ni	Always	Always

“Conflict Metals” Commitment

We at Stackpole Electronics, Inc. are joined with our industry in opposing the use of metals mined in the “conflict region” of the eastern Democratic Republic of the Congo (DRC) in our products. Recognizing that the supply chain for metals used in the electronics industry is very complex, we work closely with our own suppliers to verify to the extent possible that the materials and products we supply do not contain metals sourced from this conflict region. As such, we are in compliance with the requirements of Dodd-Frank Act regarding Conflict Minerals.


Compliance to “REACH”

We certify that all passive components supplied by Stackpole Electronics, Inc. are SVHC (Substances of Very High Concern) free and compliant with the requirements of EU Directive 1907/2006/EC, “The Registration, Evaluation, Authorization and Restriction of Chemicals”, otherwise referred to as REACH. Contact us for complete list of REACH Substance Candidate List.

Environmental Policy

It is the policy of Stackpole Electronics, Inc. (SEI) to protect the environment in all localities in which we operate. We continually strive to improve our effect on the environment. We observe all applicable laws and regulations regarding the protection of our environment and all requests related to the environment to which we have agreed. We are committed to the prevention of all forms of pollution.

How to Order



Product Series	
Code	Description
CSS	Metal Alloy
CSSH	High Power

Size	
Size	Power
0603	0.33W
0805	0.5W
1206	1W
2010	1W
2512	2W
(H)2512	3W
2725	4W
2728	3W
(H)2728	4W
4527	5W

Tolerance	
Code	Tol
D	0.5%
F	1%
G	2%
J	5%

Packaging			
Code	Description	Size	Quantity
T	7" Reel - Plastic Tape	0603, 0805	5,000
		1206	4,000
		2010, 2512 (H)2512	2,000
		2725, 2728 (H)2728	1,000
		4527	500

Resistance Value
Four characters with the multiplier used as the decimal holder.
"L" used as multiplier of 10 ⁻³ for any value under 0.1 ohm.
0.00025 ohm = L250
0.004 ohm = 4L00
0.05 ohm = 50L0
0.12 ohm = R120