


# H=1.4mm Slide Switches SSQ Series

## FEATURES


1. 1.4mm in height.
2. Suitable for SMT reflow soldering.
3. Packaged in a tape (taping package) to allow the auto mounting of switches.
4. Changeover timing cannot be specified.
5. With/Without Earth terminal and With/Without click feeling are available.

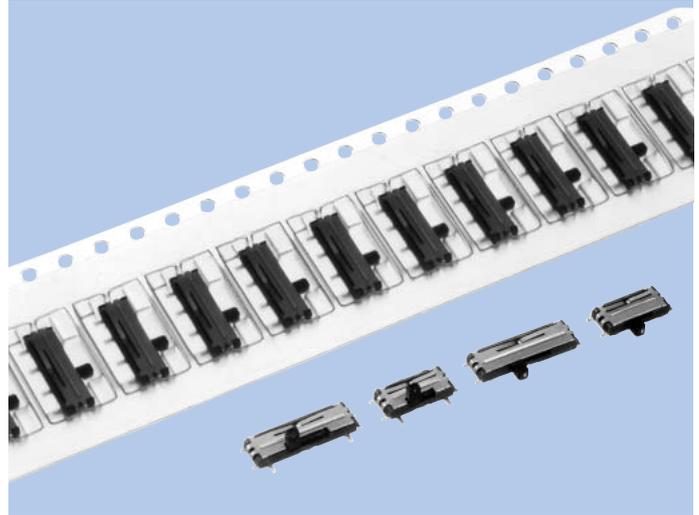

## APPLICATIONS

1. For portable audios, radios, LCD TVs, video cameras, etc.
2. For protecting overwrite of memory cards.
3. For presetting switch.

## MODEL NAME CODE

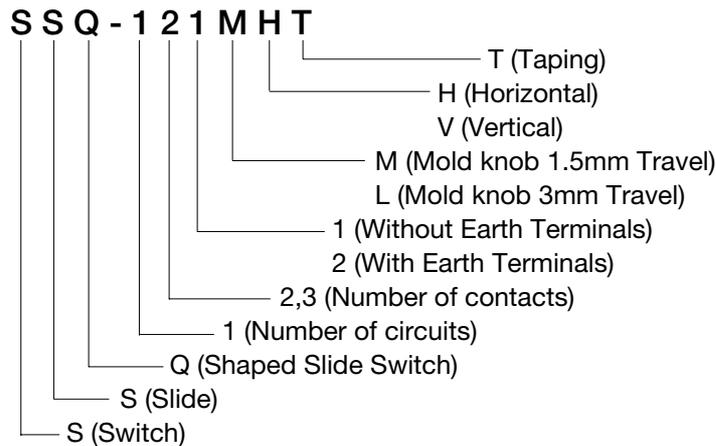


## SPECIFICATIONS

Electrical Characteristics	Rating	0.3A, 4V DC
	Contact Resistance	70mΩ or less
	Insulation Resistance	100MΩ or more
	Withstand Voltage	1 minute at 100V AC
Mechanical Characteristics	Operating Force	2-contacts type 1.47±0.98N
		3-contacts type a→b/c→b 1.47±0.98N b→a/b→c 1.96±0.98N
		Life


TYPE

Model Name Code	Order Number	No. of Poles	No. of Contacts	Travel (mm)	Knob Direction	Terminal Earth	Pcs/Reel
SSQ-122MHT	R66 6588	1	2	1.5	Horizontal	With	4,000
SSQ-121MHT	R66 6658	1	2	1.5	Horizontal	Without	4,000
SSQ-122MVT	R66 6624	1	2	1.5	Vertical	With	2,500
SSQ-121MVT	R66 6671	1	2	1.5	Vertical	Without	2,500
SSQ-122LHT	R66 6647	1	2	3	Horizontal	With	4,000
SSQ-121LHT	R66 6672	1	2	3	Horizontal	Without	4,000
SSQ-132MHT	R66 6609	1	3	1.5	Horizontal	With	4,000
SSQ-131MHT	R66 6673	1	3	1.5	Horizontal	Without	4,000
SSQ-132MVT	R66 6639	1	3	1.5	Vertical	With	2,500
SSQ-131MVT	R66 6674	1	3	1.5	Vertical	Without	2,500


DIMENSIONS

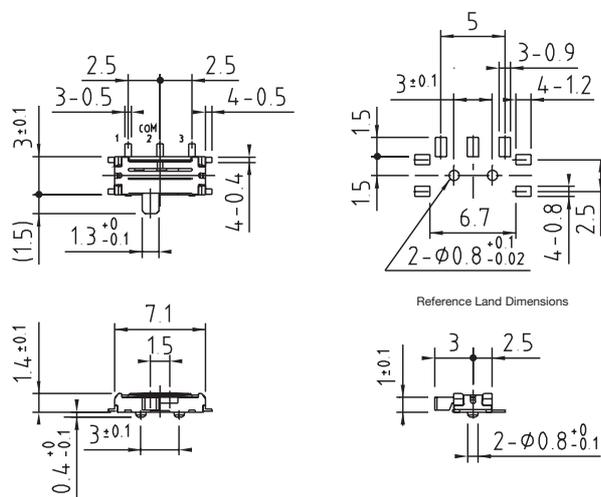


SSQ-122MHT (1-pole, 2-contacts : Horizontal) Unit : mm

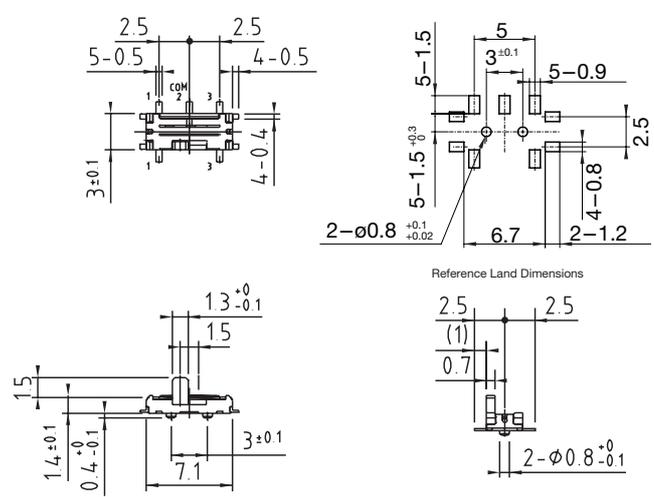

SSQ-122MVT (1-pole, 2-contacts : Vertical) Unit : mm

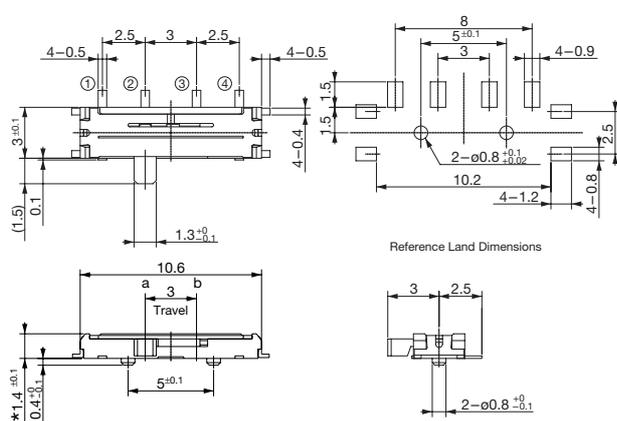

SSQ-122LHT (1-pole, 2-contact : 3mm travel) Unit : mm

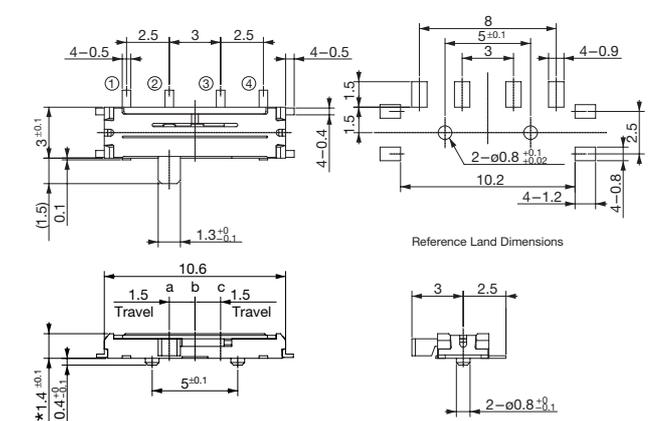

SSQ-132MHT (1-pole, 3-contacts : Horizontal) Unit : mm