

DIP 14 SERIES REED RELAYS

MSS2 ■ MSS7 ■ PRMA ■ DSS7 ■ PRME ■ MVS2 ■ MVS7



DESCRIPTION

CP Clare's epoxy molded DIP 14 Series offers a variety of contacts and schematics to meet the needs of a wide range of applications. It features the MVS2/MVS7 models designed for high reliability. The MSS2/7 DIPs are 1 form A relays equipped with the MYAD® all-position mounting switch. With switching up to 50 Watts and a 4000V isolation option, the DIP 14 Series is a relay package that allows for automatic insertion directly on PCBs as well as insertion into standard 14 pin DIP sockets.

FEATURES

- All position mercury contacts on some models
- Stable contact resistance over life
- 4000 Vac input-output isolation
- Bounce free operation
- High insulation resistance
- Switching speed of 300 Hz
- Long life > 1 billion operations
- Epoxy molded for automatic board processing

APPLICATIONS

- Automatic test equipment
- Process control
- Industrial
- Telecom
- Datacom
- High-end security systems
- Signaling
- Metering

APPROVALS

- UL approval (DSS7 & PRMA)
- BSI approval (DSS7 & MSS7)
- BS EN 60950 approval (MVS7)
- CSA approval (PRMA)
- FCC68 approval (MSS2 & MSS7)

RATINGS @ 25°C

Parameter	Min	Typ	Max	Unit
Switching Voltage				
PRMA/PRME/DSS7			200	Volts
PRMA Form C			100	Volts
MSS2/MSS7			500	Volts
MVS2/MVS7			1000	Volts
Switching Current				
PRMA/PRME/DSS7			0.5	Amps
PRMA Form C			0.25	Amps
MSS2/MSS7/MVS2/MVS7			2	Amps
Carry Current				
PRMA/PRME/DSS7			2	Amps
PRMA Form C			0.4	Amps
MSS2/MSS7			3	Amps
MVS2/MVS7			3	Amps
Switching Frequency				
PRMA/PRME/DSS7			500	Hz
PRMA Form C			50	Hz
MSS2/MSS7/MVS2/MVS7			200	Hz
Contact Resistance				
PRMA/PRME/DSS7			150	mΩ
PRMA Form C			200	mΩ
MSS2/MSS7/MVS2/MVS7			100	mΩ

(See detailed specifications for more information.)

SPECIFICATIONS

All parameters are at 25°C unless otherwise stated.
Operate voltage, release voltage, and coil resistance will change approximately 0.4%/°C as ambient temperature varies.

MSS2	MSS7	PRMA
Molded 8-pin	Molded 4-pin	Molded 8-pin
All position	All position	Form C
Wetted contacts	Wetted contacts	Dry Reed

Parameter	Conditions	Symbol	Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	Units
Contact Ratings												
Switching Voltage	Max DC/PeakAC Resistive	VL			500			500			100	Volts
Switching Current	Max DC/PeakAC Resistive	IL			2			2			0.25	Amps
Carry Current	Max DC/PeakAC Resistive	Ic			3			3			0.4	Amps
Contact Rating	Max DC/PeakAC Resistive				50			50			3	Watts
Life Expectancy	Signal Level 1.0 V 10mA Rated Loads ¹			200			200			20		x10 ⁶ Ops
Static Contact Resistance	50mV, 10mA	CR		40	100		65	100			200	mΩ
Dynamic Contact Resistance	.5V, 50mA at 100 Hz, 1.5 msec	DCR		N/A			N/A			N/A		mΩ
Contact Material				Hg			Hg			Rh		
Hg Content				16			16			N/A		mgrams
Relay Specifications												
Insulation Resistance	Between all isolated pins at 100V, 25°C, 40% RH	IR	10 ⁸	10 ¹⁰		10 ⁸	10 ¹⁰		10 ⁹	10 ¹⁰		Ω
Capacitance	Across Open Contacts			1.5	2		1.2	2		2.5	3	pF
	Open Contact to Coil			3	4		3	4		3	3	pF
Dielectric Strength	Between Contacts		1400			2000			250			VDC/Peak AC
	Contacts to Coil	I/O	1400			5600			1400			VDC/Peak AC
Operate Time, including bounce (PRMA only)	At Nominal Coil Voltage 10Hz Square Wave	T _{OP}		1.2	1.75		1.2	1.75		1.5	2	ms
Release Time	Zener-Diode Suppression	T _{REL}		1	1.50		1	1.50		1.5	3	ms
Environmental Ratings												
Storage Temperature		T _A	-40		+105	-40		+105	-40		+105	°C
Operating Temperature		T _O	-38		+75	-38		+75	-40		+80	°C
Soldering Temperature	Applied to pins, 5 sec. max.			260			260			260		°C
Vibration Resistance (Survival)	10 Hz - 500 Hz (5 Hz - 500 Hz for PRMA)	G			10			10			10	Gs
Shock Resistance (Survival)	11±1ms, 1/2 Sine Wave	S			30			30			50	Gs
Weight				2.3			2.3			1.5		grams

¹ Refer to life graphs









DIP 14 SERIES REED RELAYS

MSS2 ■ MSS7 ■ PRMA ■ DSS7 ■ PRME ■ MVS2 ■ MVS7

COIL SPECIFICATIONS

	Contact Form	Coil Voltage			Coil Resistance			Operate Voltage			Release Voltage			Nominal Input Power		
Units		Volts			Ω			Volts			Volts			mW		
Conditions					+/- 10% (25°C)			Must operate by (25°C)			Must release by (25°C)					
Part #		Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	Min	Typ	Max
MSS2 1A05	1 Form A		5	11	126	140	154	0.5		3.75	0.5		3.75		179	
MSS2 1A12	1 Form A		12	21	450	500	550	1		9	1		9		288	
MSS2 1A24	1 Form A		24	44	1935	2150	2365	2		18	2		18		268	
MSS7 1A05	1 Form A		5	11	126	140	154	0.5		3.75	0.5		3.75		179	
MSS7 1A12	1 Form A		12	21	450	500	550	1		9	1		9		288	
MSS7 1A24	1 Form A		24	43	1935	2150	2365	2		18	2		18		268	
PRMA 1A05	1 Form A		5	21	450	500	550	0.8		3.75	0.8		3.75		50	
PRMA 1A12	1 Form A		12	30	900	1000	1100	1		9	1		9		144	
PRMA 1A24	1 Form A		24	44	1935	2150	2365	2		18	2		18		268	
PRMA 1B05	1 Form B		5	6	450	500	550	0.8		3.75	0.8		3.75		50	
PRMA 1B12	1 Form B		12	14.5	900	1000	1100	1		9	1		9		144	
PRMA 1B24	1 Form B		24	29	1935	2150	2365	2		18	2		18		268	
PRMA 1C05	1 Form C		5	12	180	200	220	0.8		3.75	0.8		3.75		125	
PRMA 1C12	1 Form C		12	18	450	500	550	1		9	1		9		288	
PRMA 1C24	1 Form C		24	32	1935	2150	2365	2		18	2		18		268	
PRMA 2A05	2 Form A		5	11	126	140	154	0.8		3.75	0.8		3.75		179	
PRMA 2A12	2 Form A		12	21	450	500	550	1		9	1		9		288	
PRMA 2A24	2 Form A		24	44	1935	2150	2365	2		18	2		18		268	
PRMA 10037	1 Form A		5	15	342	380	418	0.8		3.75	0.8		3.75		66	
PRMA 10038	1 Form A		12	19	477	530	583	1		9	1		9		272	
PRMA 10039	1 Form A		24	32	1800	2000	2200	2		18	2		18		288	
DSS7 1A05	1 Form A		5	21	450	500	550	0.8		3.75	0.8		3.75		50	
DSS7 1A12	1 Form A		12	30	900	1000	1100	1		9	1		9		144	
DSS7 1A24	1 Form A		24	44	1935	2150	2365	2		18	2		18		268	
PRME 25005	1 Form A		5	19	450	500	550	0.8		3.8	0.8		3.8		50	
PRME 15005	1 Form A		5	15	342	380	418	1		3.5	1		3.5		66	
PRME 15002	1 Form A		12	19	477	530	583	1		8	1		8		272	
PRME 15003	1 Form A		24	32	1800	2000	2200	2		16	2		16		288	
MVS2 1A05(A,B)	1 Form A		5	7	94.5	105	116	0.5		3.75	0.5		3.75		238	
MVS2 1A12(A,B)	1 Form A		12	15	450	500	550	1		9	1		9		288	
MVS2 1A24(A,B)	1 Form A		24	30	1935	2150	2365	2		18	2		18		268	
MVS7 1A05(S)	1 Form A		5	7	94.5	105	116	0.5		3.75	0.5		3.75		238	
MVS7 1A12(S)	1 Form A		12	15	450	500	550	1		9	1		9		288	
MVS7 1A24(S)	1 Form A		24	30	1935	2150	2365	2		18	2		18		268	

PERFORMANCE GRAPHS

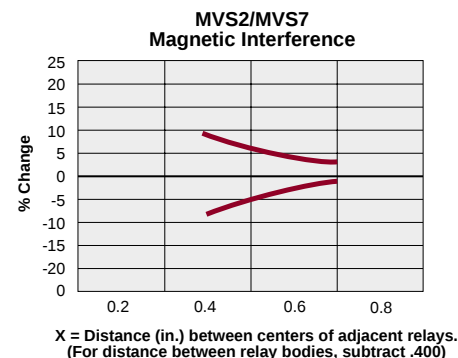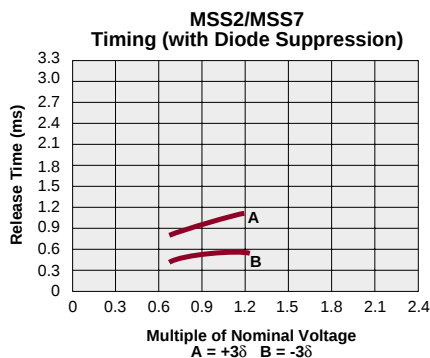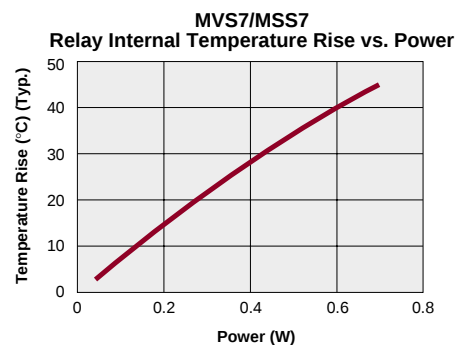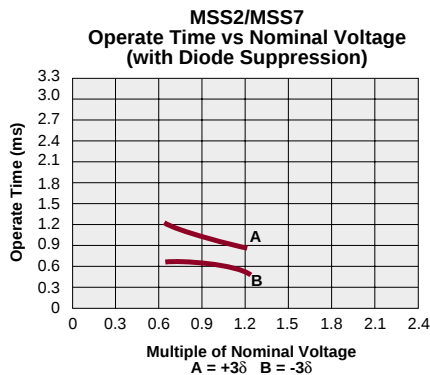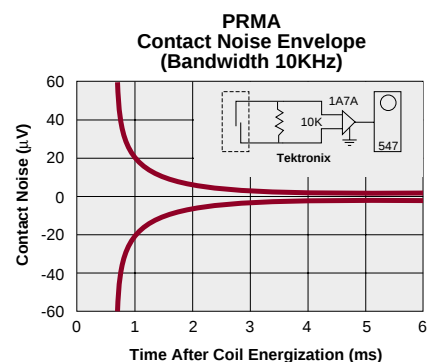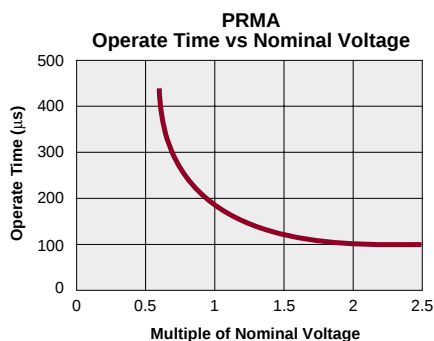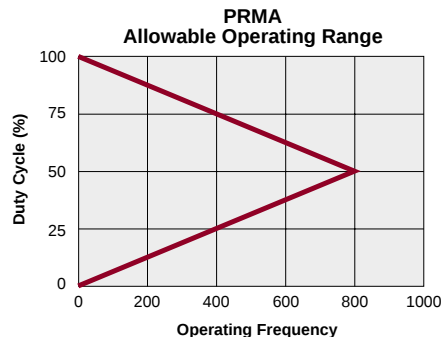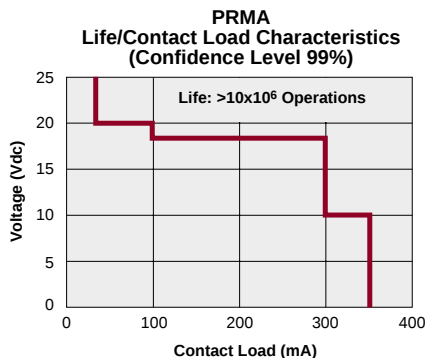


DIP 14 SERIES REED RELAYS

MSS2 ■ MSS7 ■ PRMA ■ DSS7 ■ PRME ■ MVS2 ■ MVS7


MECHANICAL DIMENSIONS

mm
(inches)

MVS2/MSS2/PRMA

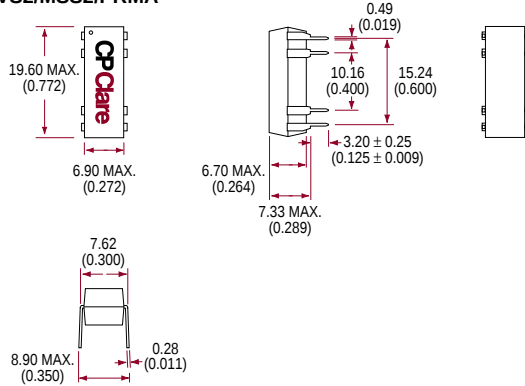


PRMA 1A




Options:
Diode - pin #2 is positive
Electrostatic shield - pin 9

PRMA 1B




Options:
Diode - pin #2 is positive
Electrostatic shield - pin 9

PRMA 1C




Options:
Diode - pin #2 is positive
Electrostatic shield - pin 9

PRMA 2A




Options:
Diode - pin #2 is positive
Electrostatic shield - pin 9

PRMA 10037/10038/10039






MVS2/MSS2






* MVS2 only must be mounted vertically with pin #1 UP.

PRME

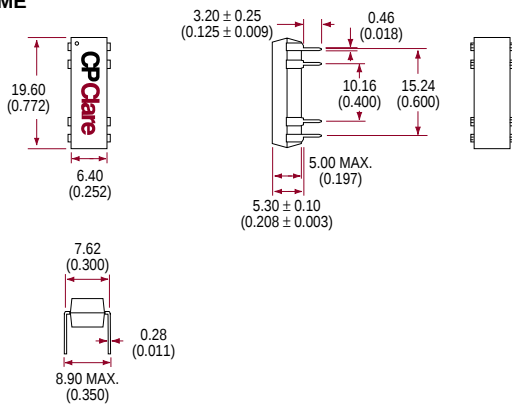

Options:
Diode - pin #13 is positive
Electrostatic shield - pin 9

DSS7/MSS7

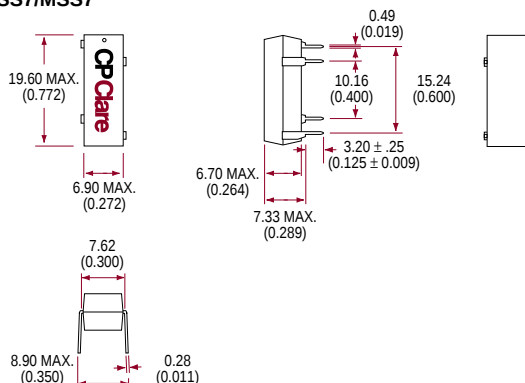


MVS7 must be mounted vertically. Pin #1 is up.

MSS2 ■ MSS7 ■ PRMA ■ DSS7 ■ PRME ■ MVS2 ■ MVS7

ORDERING INFORMATION

A complete part number is represented by the digits below. For example, the MVS21A05 is a model 2 MVS relay with a 1 Form A contact form, a nominal voltage of 5V and no extra options.

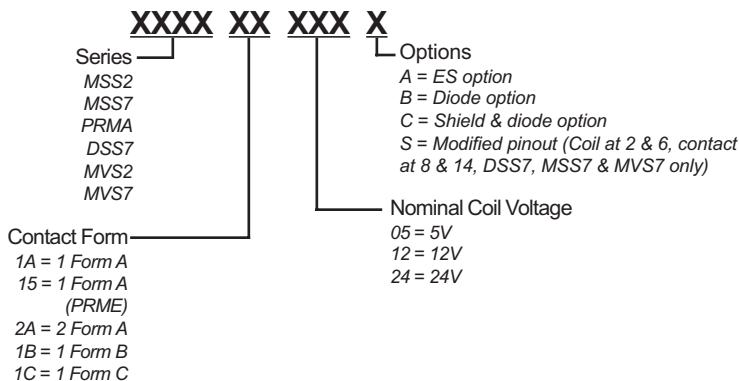

Ordering Information Special Schematics

PRME 25005
PRME 15005
PRME 15002
PRME 15003

PRMA 10037
PRMA 10038
PRMA 10039

*These represent
full part numbers.*