



Advanced Microwave Technologies

115MHz Bandpass SAW Filter
22.00MHz Bandwidth
Part Number : A11560

Specifications

Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	114.9	115	115.1
Insertion Loss	dB	-	29	30
1.5 dB Bandwidth	MHz	-	21.90	-
3 dB Bandwidth	MHz	22.00	22.05	-
30 dB Bandwidth	MHz	-	22.76	22.80
40 dB Bandwidth	MHz	-	22.90	23.20
50 dB Bandwidth	MHz	-	23.00	-
Passband Variation	dB	-	1.2	1.5
Absolute Delay	usec	-	3.6	4
Ultimate Rejection	dB	50	58	-
Material Temperature coefficient	KHz/°C	-9.43		
Ambient Temperature	°C	25		
Package Size	DIP3512 (35.2x12.7x5.2mm3)			

Notes:

1. All specifications are based on the test circuit shown
2. In production, devices will be tested at room temperature to a guardbanded specification to ensure electrical compliance over temperature
3. Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances
4. This is the optimum impedance in order to achieve the performance show

Matching Configuration




L1=68nH

Source/Load Impedance=50 ohm

Notes - Component values may change depending on board layout.

Package Dimension

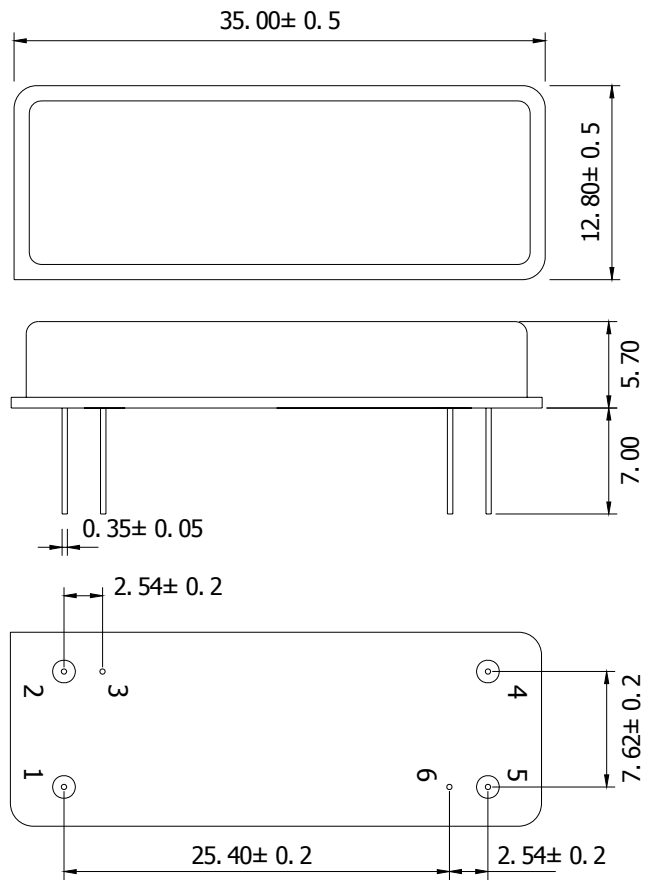

Package: DIP3512

Unit: mm


Input	1
Output	5
Ground	2, 3, 4, 6

Package: DIP3512


Unit: mm

Typical Performance


Frequency Response

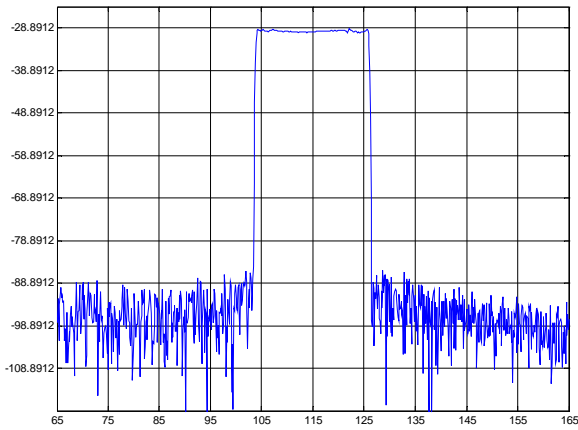


Passband Response

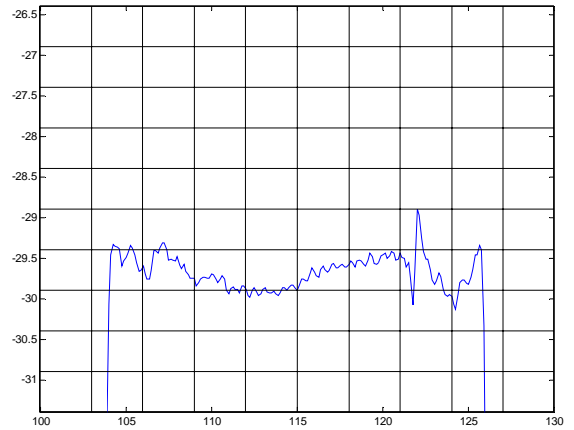


Group Delay Variation($f_0 \pm 10\text{MHz}$)

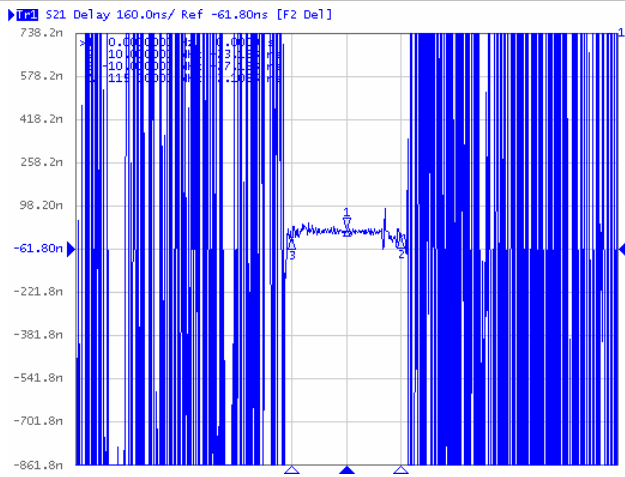


Phase Linearity($f_0 \pm 10\text{MHz}$)

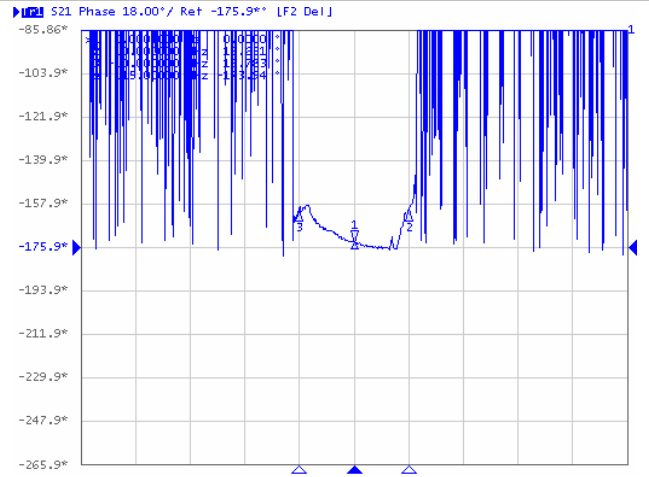

Smith Chart S11

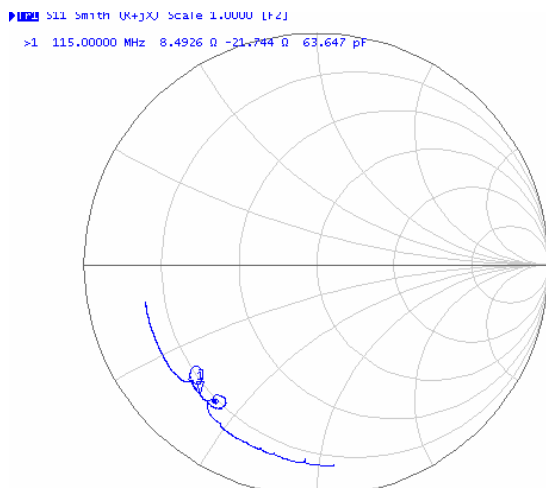

Smith Chart S22

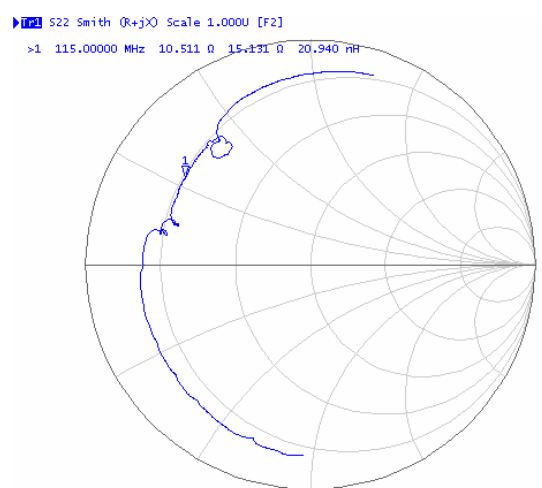

Marking

**AMT
A11560**



QMS : ISO9001



EMS : ISO14001

AMT Co., Ltd

phone +82-2-2062-1074 fax +82-2-2062-1081

www.amsaw.com / amt@amsaw.com