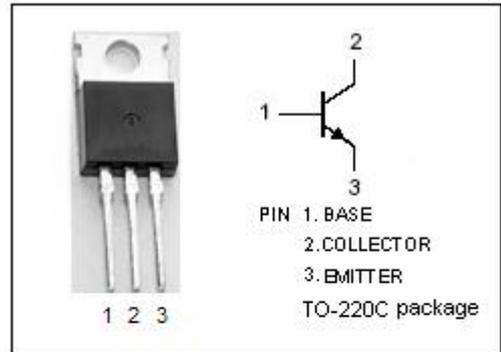


isc Silicon NPN Power Transistors
D44TD3/4/5
DESCRIPTION

- Collector-Emitter Sustaining Voltage-
: $V_{CEO(SUS)} = 300V(\text{Min})$ - D44TD3
= 350V(Min)- D44TD4
= 400V(Min)- D44TD5
- High Switching Speed
- Low Saturation Voltage
- Minimum Lot-to-Lot variations for robust device performance and reliable operation

APPLICATIONS


- Designed for switching regulators, high resolution deflection circuits, inverters and motor drivers.


ABSOLUTE MAXIMUM RATINGS($T_a=25^\circ\text{C}$)

SYMBOL	PARAMETER	VALUE	UNIT	
V_{CEV}	Collector-Emitter Voltage	D44TD3	400	V
		D44TD4	500	
		D44TD5	600	
V_{CEO}	Collector-Emitter Voltage	D44TD3	300	V
		D44TD4	350	
		D44TD5	400	
V_{EBO}	Emitter-Base Voltage	5	V	
I_C	Collector Current-Continuous	4	A	
I_{CM}	Collector Current-Peak	8	A	
P_C	Collector Power Dissipation @ $T_C=25^\circ\text{C}$	50	W	
T_J	Junction Temperature	150	$^\circ\text{C}$	
T_{stg}	Storage Temperature Range	-65~150	$^\circ\text{C}$	

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th\ j-c}$	Thermal Resistance, Junction to Case	1.56	$^\circ\text{C}/\text{W}$

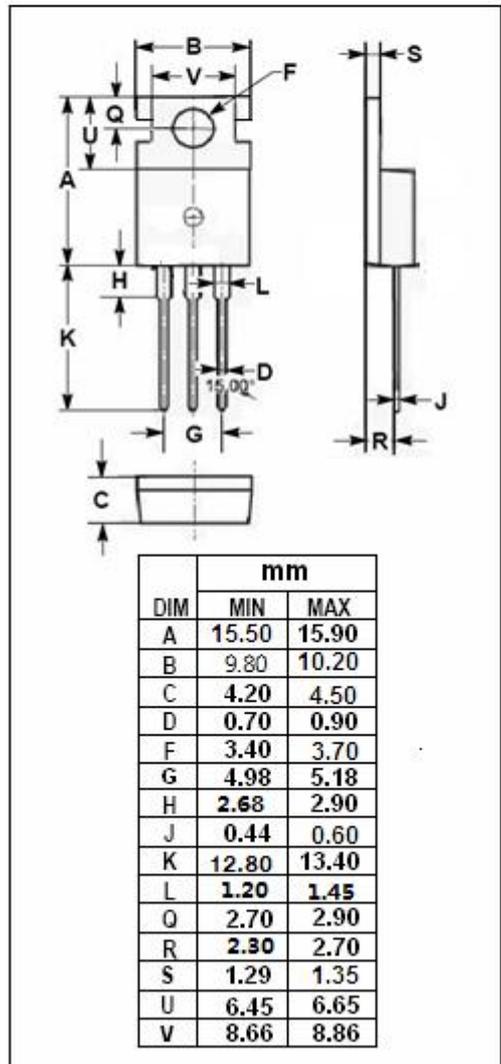

ELECTRICAL CHARACTERISTICS $T_C=25^\circ\text{C}$ unless otherwise specified

SYMBOL	PARAMETER		CONDITIONS	MIN	MAX	UNIT
$V_{CEO(SUS)}$	Collector-Emitter Sustaining Voltage	D44TD3	$I_C=0.1\text{A}; I_B=0$	300		V
		D44TD4		350		
		D44TD5		400		
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage		$I_C=2\text{A}; I_B=0.4\text{A}$		1.0	V
$V_{BE(sat)}$	Base-Emitter Saturation Voltage		$I_C=2\text{A}; I_B=0.4\text{A}$		1.5	V
I_{CEV}	Collector Cutoff Current	D44TD3	$V_{CE}=400\text{V}; V_{BE(off)}=1.5\text{V}$		0.1	mA
		D44TD4	$V_{CE}=500\text{V}; V_{BE(off)}=1.5\text{V}$		0.1	
		D44TD5	$V_{CE}=600\text{V}; V_{BE(off)}=1.5\text{V}$		0.1	
I_{EBO}	Emitter Cutoff Current		$V_{EB}=6\text{V}; I_C=0$		1.0	mA
h_{FE}	DC Current Gain		$I_C=2\text{A}; V_{CE}=3\text{V}$	5		

NOTICE:

ISC reserves the rights to make changes of the content herein the datasheet at any time without notification. The information contained herein is presented only as a guide for the applications of our products.

ISC products are intended for usage in general electronic equipment. The products are not designed for use in equipment which require specialized quality and/or reliability, or in equipment which could have applications in hazardous environments, aerospace industry, or medical field. Please contact us if you intend our products to be used in these special applications.

ISC makes no warranty or guarantee regarding the suitability of its products for any particular purpose, nor does ISC assume any liability arising from the application or use of any products, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages.