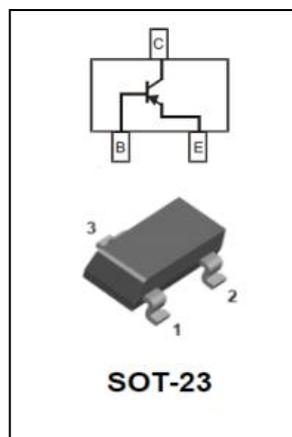


isc Silicon PNP Transistor
MMBT2907A
DESCRIPTION

- Low Voltage Use
- Ultra Super Mini Mold Package
- Minimum Lot-to-Lot variations for robust device performance and reliable operation

APPLICATIONS

- Designed for use in low noise and small signal amplifiers from VHF band to UHF band

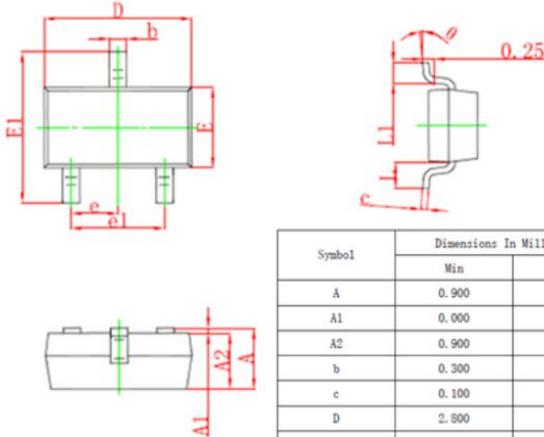

ABSOLUTE MAXIMUM RATINGS(T_a=25°C)

SYMBOL	PARAMETER	VALUE	UNIT
V _{CBO}	Collector-Base Voltage	-60	V
V _{CEO}	Collector-Emitter Voltage	-60	V
V _{EBO}	Emitter-Base Voltage	-5	V
I _C	Collector Current-Continuous	-0.6	A
P _C	Collector Power Dissipation @T _C =25°C	0.3	W
T _J	Junction Temperature	-55~150	°C
T _{stg}	Storage Temperature Range	-55~150	°C

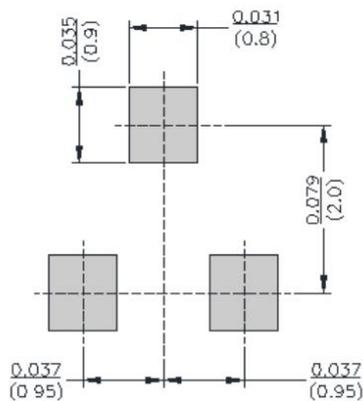
ELECTRICAL CHARACTERISTICS

 T_C=25°C unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V _{(BR)CEO}	Collector-Emitter Breakdown Voltage	I _C = -10mA ; I _B = 0	-60			V
I _{CBO}	Collector Cutoff Current	V _{CE} = -50V ; I _E = 0			-0.1	μ A
I _{CEX}	Collector Cutoff Current	V _{CE} = -30V ; V _{BE} =-0.5V			-0.05	μ A
h _{FE}	DC Current Gain	I _C =-0.1mA ; V _{CE} = -10V	75			
		I _C =1mA ; V _{CE} = -10V	100			
		I _C =-10mA ; V _{CE} = -10V	100			
		I _C =-150mA ; V _{CE} = -10V	100		300	
		I _C =-500mA ; V _{CE} = -10V	50			
V _{CE(sat)-1}	Collector-Emitter Saturation Voltage	I _C = -150mA , I _B = -15mA			-0.4	V
V _{CE(sat)-2}	Collector-Emitter Saturation Voltage	I _C = -500mA , I _B = -50mA			-1.6	V
V _{BE(sat)-1}	Base-Emitter Saturation Voltage	I _C = -150mA , I _B = -15mA			-1.3	V
V _{BE(sat)-2}	Base-Emitter Saturation Voltage	I _C = -500mA , I _B = -50mA			-2.6	V

isc Silicon PNP Transistor
MMBT2907A
■SOT-23 Package Outline Dimensions


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950TYP		0.037TYP	
e1	1.800	2.000	0.071	0.079
L	0.550REF		0.022REF	
L1	0.300	0.500	0.012	0.020
phi	0°	8°	0°	8°

■SOT-23Suggested Pad Layout

NOTICE:

ISC reserves the rights to make changes of the content herein the datasheet at any time without notification. The information contained herein is presented only as a guide for the applications of our products.

ISC products are intended for usage in general electronic equipment. The products are not designed for use in equipment which require specialized quality and/or reliability, or in equipment which could have applications in hazardous environments, aerospace industry, or medical field. Please contact us if you intend our products to be used in these special applications.

ISC makes no warranty or guarantee regarding the suitability of its products for any particular purpose, nor does ISC assume any liability arising from the application or use of any products, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages.