

## PRODUCT FEATURES

- IGBT CHIP(1700V Trench+Field Stop technology)
- Low turn-off losses, short tail current
- $V_{CE(sat)}$  with positive temperature coefficient
- Ultra Low Loss,High Ruggedness
- Free wheeling diodes with fast and soft reverse recovery



## APPLICATIONS

- AC motor control
- Motion/servo control
- Inverter and power supplies
- Photovoltaic/Fuel cell

### IGBT-inverter

ABSOLUTE MAXIMUM RATINGS( $T_C=25^{\circ}C$  unless otherwise specified)

| Symbol    | Parameter/Test Conditions         |   | Values   | Unit |
|-----------|-----------------------------------|---|----------|------|
| $V_{CES}$ | Collector Emitter Voltage         | $T_J=25^{\circ}C$                         | 1700     | V    |
| $V_{GES}$ | Gate Emitter Voltage              |   | $\pm 20$ |      |
| $I_C$     | DC Collector Current              | $T_C=25^{\circ}C, T_{Jmax}=175^{\circ}C$  | 115      | A    |
|           |                                   | $T_C=100^{\circ}C, T_{Jmax}=175^{\circ}C$ | 75       |      |
| $I_{CM}$  | Repetitive Peak Collector Current | $t_p=1ms$                                 | 150      |      |
| $P_{tot}$ | Power Dissipation Per IGBT        | $T_C=25^{\circ}C, T_{Jmax}=175^{\circ}C$  | 555      | W    |

### Diode-inverter

ABSOLUTE MAXIMUM RATINGS ( $T_C=25^{\circ}C$  unless otherwise specified)

| Symbol      | Parameter/Test Conditions       |                                    | Values | Unit   |
|-------------|---------------------------------|------------------------------------|--------|--------|
| $V_{RRM}$   | Repetitive Reverse Voltage      | $T_J=25^{\circ}C$                  | 1700   | V      |
| $I_{F(AV)}$ | Average Forward Current         |                                    | 75     | A      |
| $I_{FRM}$   | Repetitive Peak Forward Current | $t_p=1ms$                          | 150    |        |
| $I^2t$      |                                 | $T_J=125^{\circ}C, t=10ms, V_R=0V$ | 1050   | $A^2S$ |

MacMic Science & Technology Co., Ltd.

Add: #18, Hua Shan Zhong Lu, New District, Changzhou City, Jiangsu Province, P. R .of China

# MMG75S170B6TC

## IGBT-inverter

### ELECTRICAL CHARACTERISTICS ( $T_C=25^\circ\text{C}$ unless otherwise specified)

| Symbol        | Parameter/Test Conditions                      |  | Min.                    | Typ. | Max. | Unit          |
|---------------|--|--|-------------------------|------|------|---------------|
| $V_{GE(th)}$  | Gate Emitter Threshold Voltage                 | $V_{CE}=V_{GE}, I_C=3\text{mA}$  | 5.0                     | 5.8  | 6.5  | V             |
| $V_{CE(sat)}$ | Collector Emitter Saturation Voltage           | $I_C=75\text{A}, V_{GE}=15\text{V}, T_J=25^\circ\text{C}$  |                         | 2.15 | 2.6  |               |
|               |  | $I_C=75\text{A}, V_{GE}=15\text{V}, T_J=125^\circ\text{C}$   |                         | 2.35 |      |               |
|               |  | $I_C=75\text{A}, V_{GE}=15\text{V}, T_J=150^\circ\text{C}$   |                         | 2.45 |      |               |
| $I_{CES}$     | Collector Leakage Current                      | $V_{CE}=1700\text{V}, V_{GE}=0\text{V}, T_J=25^\circ\text{C}$  |                         |      | 1    | mA            |
|               |  | $V_{CE}=1700\text{V}, V_{GE}=0\text{V}, T_J=150^\circ\text{C}$   |                         |      | 10   | mA            |
| $I_{GES}$     | Gate Leakage Current                           | $V_{CE}=0\text{V}, V_{GE}=\pm 15\text{V}, T_J=25^\circ\text{C}$  | -500                    |      | 500  | nA            |
| $R_{gint}$    | Integrated Gate Resistor                       |  |                         | 7    |      | $\Omega$      |
| $Q_g$         | Gate Charge                                    | $V_{CE}=900\text{V}, I_C=75\text{A}, V_{GE}=15\text{V}$  |                         | 0.55 |      | $\mu\text{C}$ |
| $C_{ies}$     | Input Capacitance                              | $V_{CE}=25\text{V}, V_{GE}=0\text{V}, f=1\text{MHz}$   |                         | 7.1  |      | nF            |
| $C_{res}$     | Reverse Transfer Capacitance                   |  |                         |      | 220  |               |
| $t_{d(on)}$   | Turn on Delay Time                             | $V_{CC}=900\text{V}, I_C=75\text{A}$<br>$R_G=7.5\Omega,$<br>$V_{GE}=\pm 15\text{V},$<br>Inductive Load | $T_J=25^\circ\text{C}$  |      | 120  | ns            |
|               |  |  | $T_J=150^\circ\text{C}$ |      | 150  | ns            |
| $t_r$         | Rise Time                                      | $V_{GE}=\pm 15\text{V},$<br>Inductive Load   | $T_J=25^\circ\text{C}$  |      | 65   | ns            |
|               |  |  | $T_J=150^\circ\text{C}$ |      | 70   | ns            |
| $t_{d(off)}$  | Turn off Delay Time                            | $V_{CC}=900\text{V}, I_C=75\text{A}$<br>$R_G=7.5\Omega,$<br>$V_{GE}=\pm 15\text{V},$<br>Inductive Load | $T_J=25^\circ\text{C}$  |      | 480  | ns            |
|               |  |  | $T_J=150^\circ\text{C}$ |      | 520  | ns            |
| $t_f$         | Fall Time                                      | $V_{GE}=\pm 15\text{V},$<br>Inductive Load   | $T_J=25^\circ\text{C}$  |      | 200  | ns            |
|               |  |  | $T_J=150^\circ\text{C}$ |      | 360  | ns            |
| $E_{on}$      | Turn on Energy                                 | $V_{CC}=900\text{V}, I_C=75\text{A}$<br>$R_G=7.5\Omega,$<br>$V_{GE}=\pm 15\text{V},$<br>Inductive Load | $T_J=25^\circ\text{C}$  |      | 29   | mJ            |
|               |  |  | $T_J=125^\circ\text{C}$ |      | 36   | mJ            |
|               |  |  | $T_J=150^\circ\text{C}$ |      | 39   | mJ            |
| $E_{off}$     | Turn off Energy                                | $V_{GE}=\pm 15\text{V},$<br>Inductive Load   | $T_J=25^\circ\text{C}$  |      | 10   | mJ            |
|               |  |  | $T_J=125^\circ\text{C}$ |      | 17   | mJ            |
|               |  |  | $T_J=150^\circ\text{C}$ |      | 19   | mJ            |
| $I_{SC}$      | Short Circuit Current                          | $t_{psc}\leq 10\mu\text{S}, V_{GE}=15\text{V}$<br>$T_J=150^\circ\text{C}, V_{CC}=900\text{V}$          |                         | 360  |      | A             |
| $R_{thJC}$    | Junction to Case Thermal Resistance (Per IGBT) |  |                         |      | 0.27 | K/W           |

## Diode-inverter

### ELECTRICAL CHARACTERISTICS ( $T_C=25^\circ\text{C}$ unless otherwise specified)

| Symbol      | Parameter/Test Conditions                       |   | Min. | Typ. | Max. | Unit          |
|-------------|---|---|------|------|------|---------------|
| $V_F$       | Forward Voltage                                 | $I_F=75\text{A}, V_{GE}=0\text{V}, T_J=25^\circ\text{C}$  |      | 1.8  | 2.2  | V             |
|             |   | $I_F=75\text{A}, V_{GE}=0\text{V}, T_J=125^\circ\text{C}$   |      | 1.9  |      |               |
|             |   | $I_F=75\text{A}, V_{GE}=0\text{V}, T_J=150^\circ\text{C}$   |      | 1.9  |      |               |
| $t_{rr}$    | Reverse Recovery Time                           | $I_F=75\text{A}, V_R=900\text{V}$<br>$dI_F/dt=-1800\text{A}/\mu\text{s}$<br>$T_J=150^\circ\text{C}$ |      | 600  |      | ns            |
| $I_{RRM}$   | Max. Reverse Recovery Current                   |   |      | 110  |      | A             |
| $Q_{RR}$    | Reverse Recovery Charge                         |   |      | 37.3 |      | $\mu\text{C}$ |
| $E_{rec}$   | Reverse Recovery Energy                         |   |      | 17.6 |      | mJ            |
| $R_{thJCD}$ | Junction to Case Thermal Resistance (Per Diode) |   |      |      | 0.48 | K/W           |

# MMG75S170B6TC

MODULE CHARACTERISTICS ( $T_C=25^\circ\text{C}$  unless otherwise specified)

| Symbol     | Parameter/Test Conditions   | Values                        | Unit             |    |
|------------|-----------------------------|-------------------------------|------------------|----|
| $T_{Jmax}$ | Max. Junction Temperature   | 175                           | $^\circ\text{C}$ |    |
| $T_{Jop}$  | Operating Temperature       | -40~150                       |                  |    |
| $T_{stg}$  | Storage Temperature         | -40~125                       |                  |    |
| $V_{isol}$ | Isolation Breakdown Voltage | AC, 50Hz(R.M.S), $t=1$ minute | 4000             | V  |
| CTI        | Comparative Tracking Index  |                               | > 200            |    |
| Torque     | to heatsink                 | Recommended (M6)              | 3~5              | Nm |
|            | to terminal                 | Recommended (M5)              | 2.5~5            | Nm |
| Weight     |                             |                               | 160              | g  |

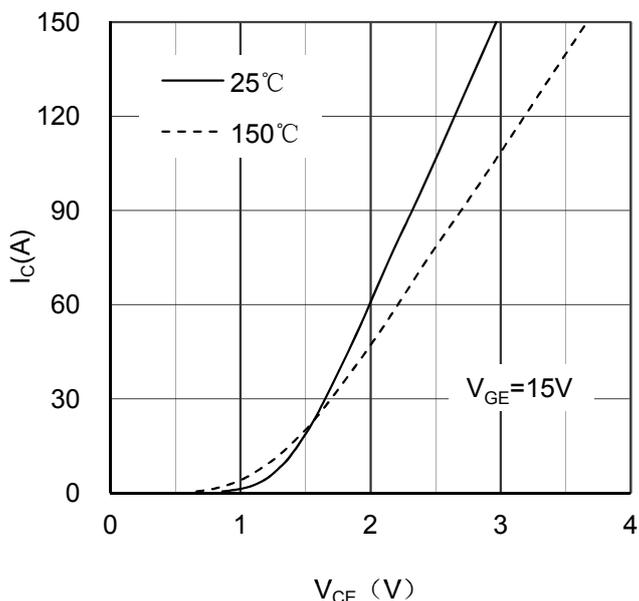


Figure 1. Typical Output Characteristics IGBT-inverter

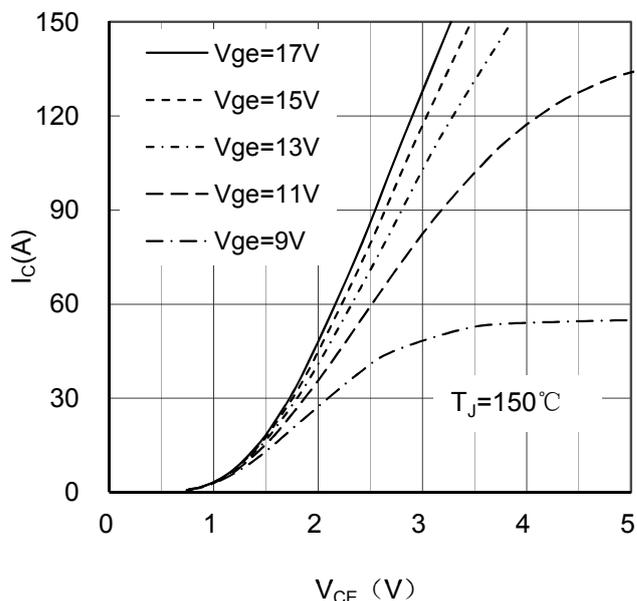


Figure 2. Typical Output Characteristics IGBT-inverter

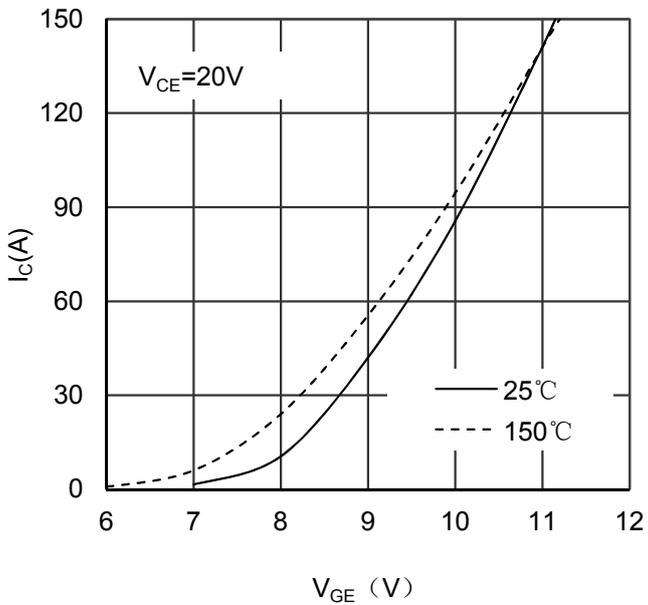


Figure 3. Typical Transfer characteristics IGBT-inverter

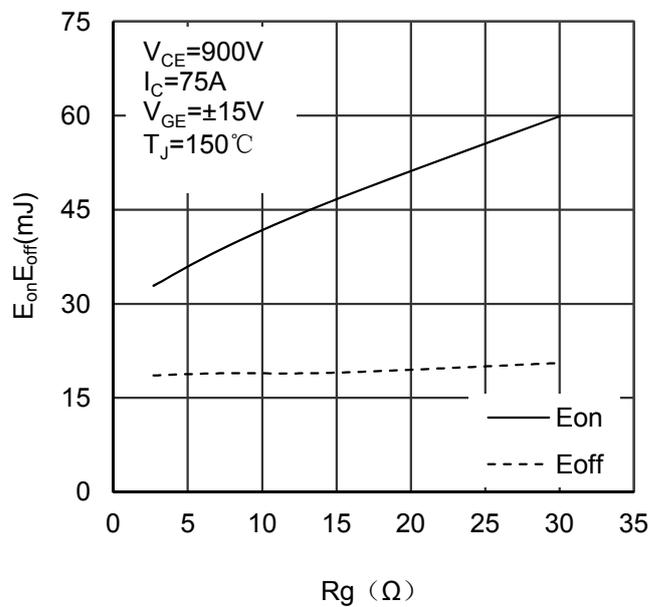


Figure 4. Switching Energy vs Gate Resistor IGBT-inverter

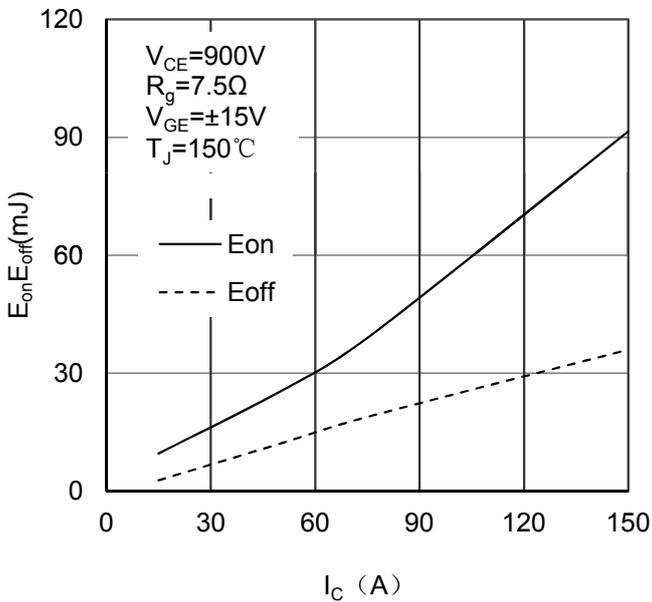


Figure 5. Switching Energy vs Collector Current IGBT-inverter

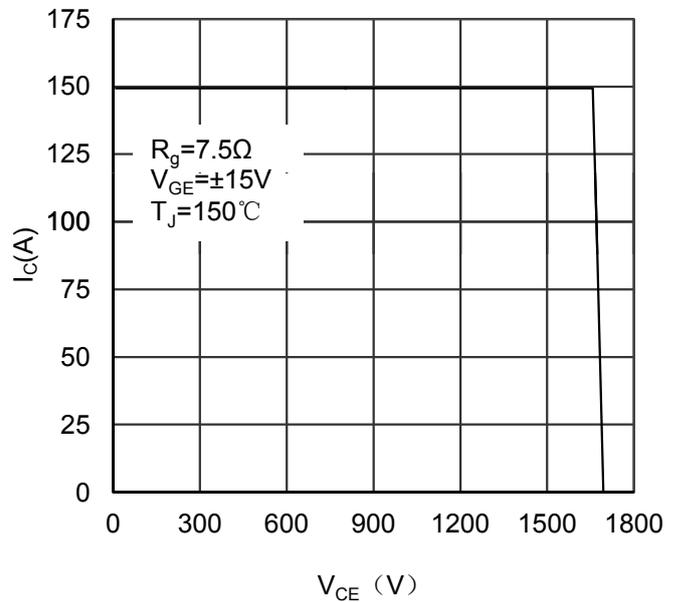


Figure 6. Reverse Biased Safe Operating Area IGBT-inverter

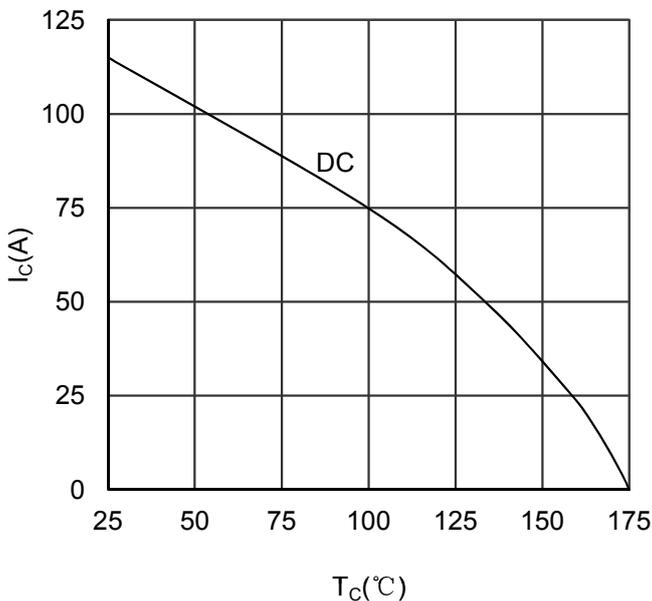


Figure 7. Collector Current vs Case temperature IGBT-inverter

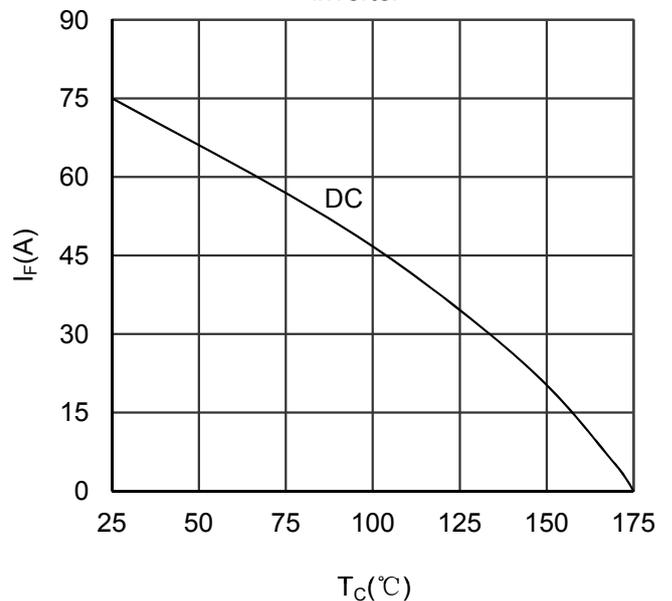


Figure 8. Forward current vs Case temperature Diode-inverter

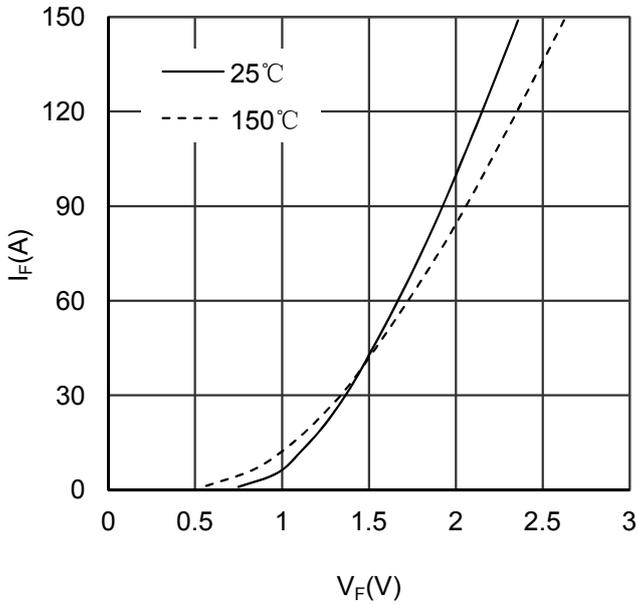


Figure 9. Diode Forward Characteristics Diode -inverter

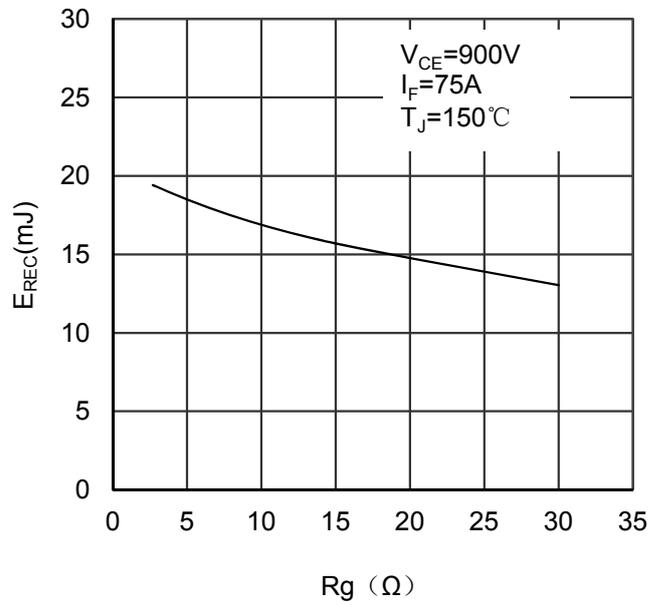


Figure 10. Switching Energy vs Gate Resistor Diode - inverter

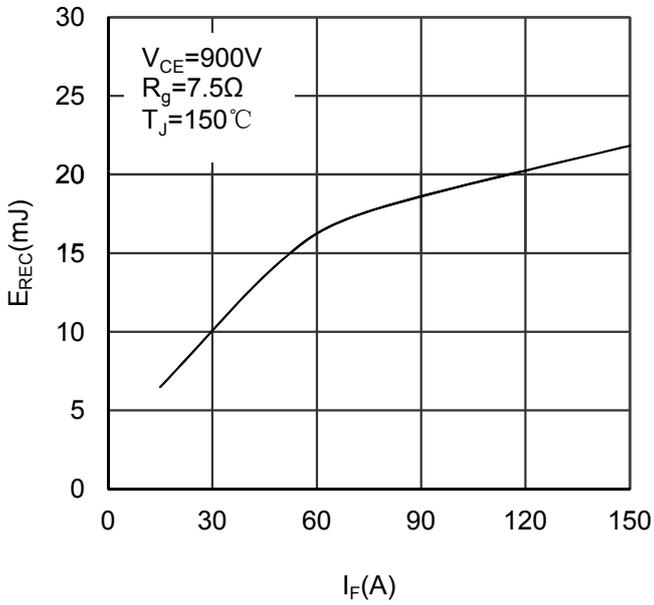


Figure 11. Switching Energy vs Forward Current Diode-inverter

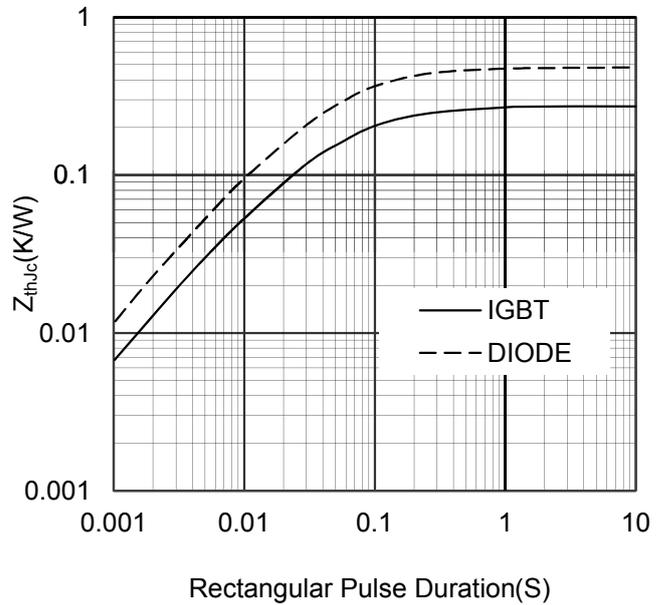


Figure 12. Transient Thermal Impedance of Diode and IGBT-inverter


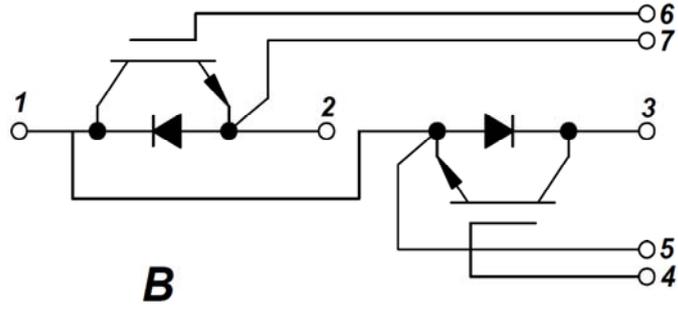


Figure 13. Circuit Diagram

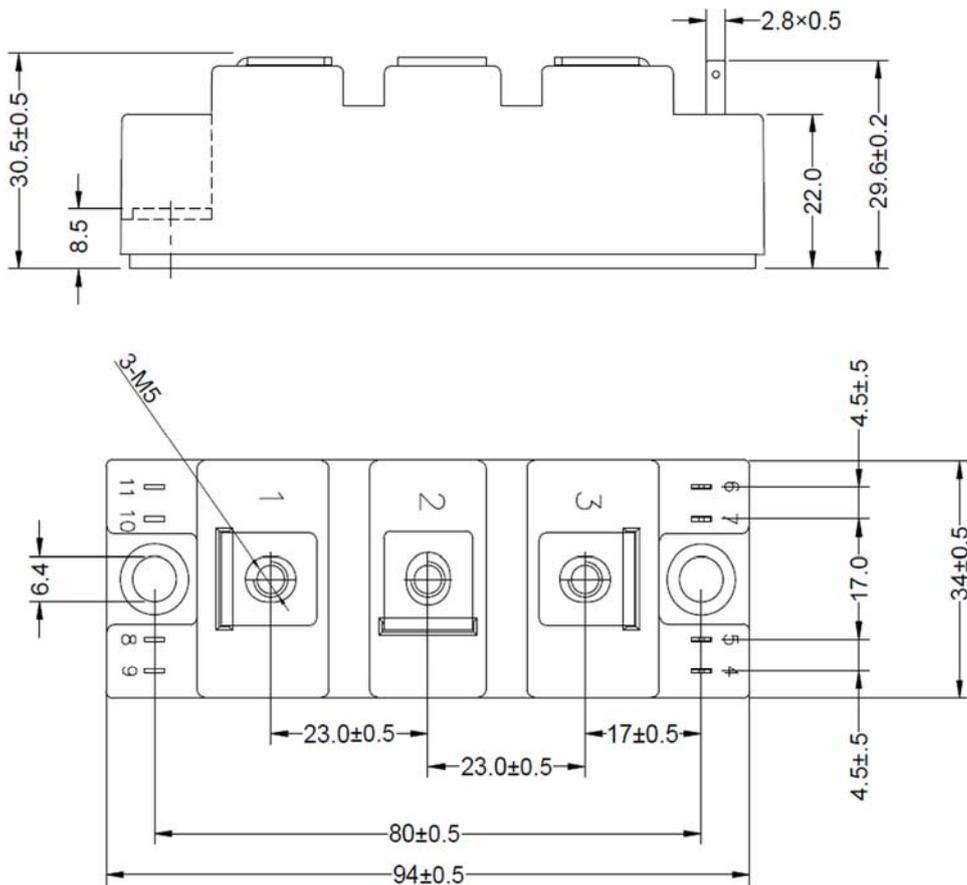

Dimensions in (mm)

Figure 14. Package Outline