



# NPS3005

0.5 V to 5.5 V, 6 A, 15 mΩ, single channel load switch with soft start

Rev. 1.1 — 10 June 2025

Product data sheet

## 1. General description

NPS3005 is a single channel load switch with an adjustable soft start. It contains a 6 A continuous current rated N-channel MOSFET that can operate over an input voltage range of 0.5 V to 5.5 V.

NPS3005 is controlled by an EN pin which supports down to 1.2 V control voltage.

NPS3005 provides stable On-resistance with an extra BIAS pin operating from 1.5 V to 5.5 V.

NPS3005 integrates over temperature protection. The internal MOSFET will be turned off when the junction temperature exceeds 160 °C and will be turned on automatically when the junction temperature drops by 20 °C.

NPS3005 integrates an 230 Ω on-chip resistor between output and ground pin for Quick Output Discharge (QOD) when the switch is turned off.

The NPS3005 is offered 8 pin 2 mm x 2 mm HWSON8 package with thermal pad for better thermal conductivity. this product family is characterized for operation over a -40 °C to +105 °C ambient temperature range.

## 2. Features and benefits

- Bias voltage range: 1.5 V to 5.5 V
- Input voltage range: 0.5 V to 5.5 V
- Maximum continuous current ( $I_{MAX}$ ) : 6 A
- 15 mΩ (typical) on-resistance
- 1.2 V control logic compatible
- Adjustable soft start
- Quick output discharge
- Thermal shutdown
- ESD protection:
  - HBM ANSI/ESDA/JEDEC JS-001 exceeds 2000 V
  - CDM ANSI/ESDA/JEDEC JS-002 exceeds 1000 V
- SOT8067-1 (HWSON8) with thermal pad (plastic thermal enhanced very very thin Small Outline packages, no leads; 8 terminals; 0.5 mm pitch; 2.0 mm x 2.0 mm x 0.75 mm body)
- Specified from -40 °C to +105 °C

## 3. Applications

- Solid State Drive (SSD)
- Notebooks and Netbooks
- Tablet PC
- Telecom/Networking/Datacom
- Set-top box
- Optical Module
- Consumer Electronic

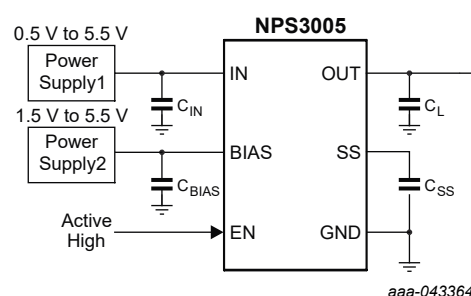


Fig. 1. Typical application circuit

4. Ordering information

Table 1. Ordering information

| Type number               | Package           |        |                                                                                                                              |                           |
|---------------------------|-------------------|--------|------------------------------------------------------------------------------------------------------------------------------|---------------------------|
|                           | Temperature range | Name   | Description                                                                                                                  | Version                   |
| <a href="#">NPS3005GP</a> | -40 °C to +105 °C | HWSON8 | Plastic thermal enhanced very very thin small outline package; no leads; 8 terminals; 0.5 mm pitch, 2.0 × 2.0 × 0.75 mm body | <a href="#">SOT8067-1</a> |

5. Marking

Table 2. Marking


| Type number | Marking code |
|-------------|--------------|
| NPS3005GP   | s35          |

6. Selection guide

Table 3. Selection guide


| Type number | Enable      | R <sub>ON</sub> | I <sub>MAX</sub> | QOD |
|-------------|-------------|-----------------|------------------|-----|
| NPS3005GP   | Active high | 15 mΩ           | 6 A              | YES |

7. Functional diagram

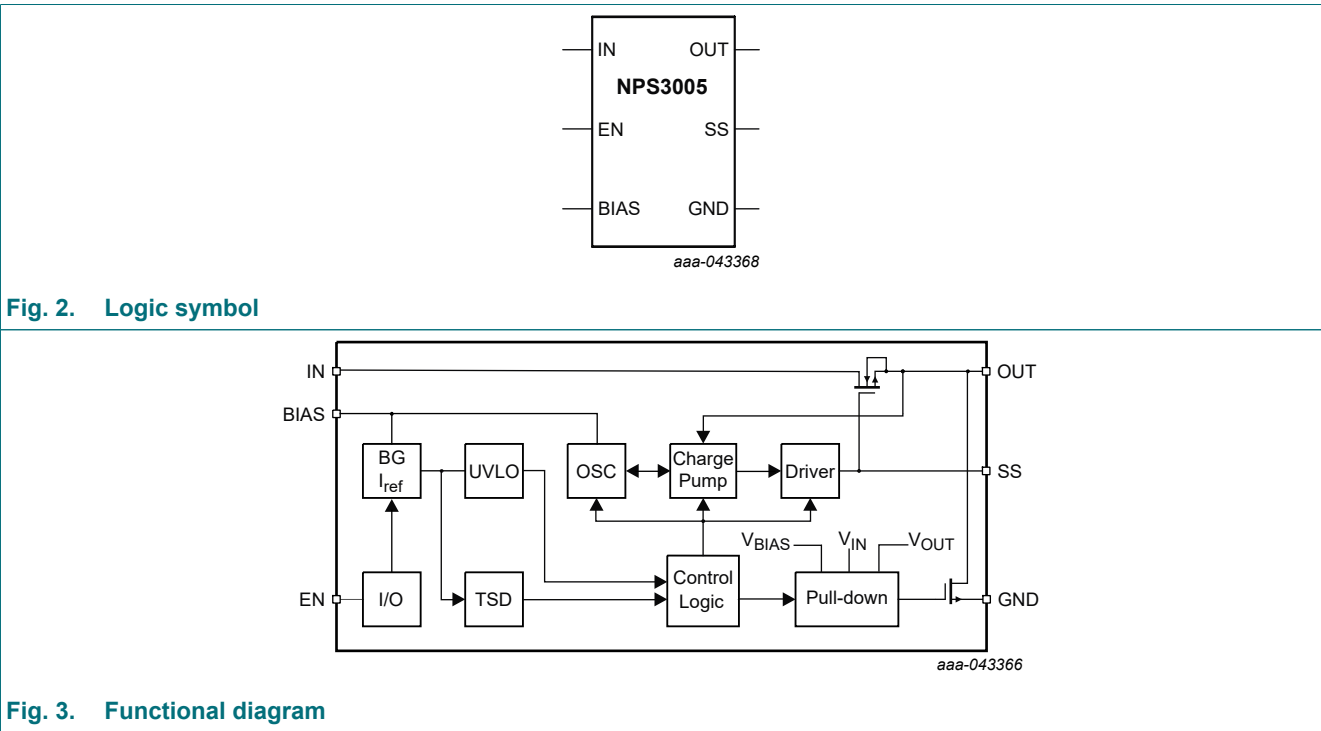

8. Pinning information

8.1. Pinning

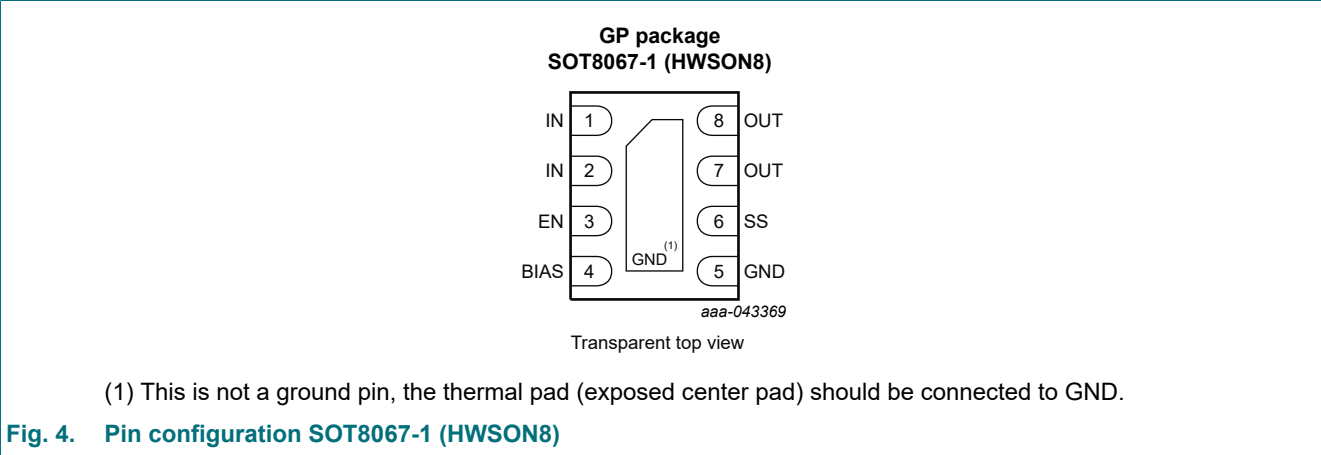

8.2. Pin description

Table 4. Pin description

| Symbol | Pin  | IO  | Description                                                                                                            |
|--------|------|-----|------------------------------------------------------------------------------------------------------------------------|
| IN     | 1, 2 | I   | Input power supply. At least 1 μF input bypass ceramic capacitor recommended for minimizing $V_{IN}$ dip.              |
| EN     | 3    | I   | Enable input of switch. Active High to enable NPS3005. Do not leave floating.                                          |
| BIAS   | 4    | I   | Supply voltage to internal control circuit.                                                                            |
| GND    | 5    |     | Ground pin of the circuitry. All voltage levels are measured with respect to this pin. Connect externally to Power PAD |
| SS     | 6    | O   | Soft start control of switch. A capacitor from this pin to ground sets the $V_{OUT}$ rise slew rate.                   |
| OUT    | 7, 8 | O   | Output to the load.                                                                                                    |
| PAD    | -    | PAD | Connect Thermal PAD to ground externally to have better thermal performance.                                           |

9. Limiting values

Table 5. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134). Voltages are referenced to GND (ground = 0 V).[1]

| Symbol            | Parameter                         | Conditions                   | Min  | Max | Unit |
|-------------------|-----------------------------------|------------------------------|------|-----|------|
| V <sub>IN</sub>   | input voltage                     |                              | −0.3 | 6   | V    |
| V <sub>OUT</sub>  | output voltage                    |                              | −0.3 | 6   | V    |
| V <sub>BIAS</sub> | bias voltage                      |                              | −0.3 | 6   | V    |
| V <sub>EN</sub>   | enable voltage                    |                              | −0.3 | 6   | V    |
| I <sub>MAX</sub>  | maximum continuous switch current |                              | -    | 6   | A    |
| I <sub>PLS</sub>  | maximum pulsed switch current     | pulse <300 μs; 2% duty cycle | -    | 8   | A    |
| T <sub>j</sub>    | junction temperature              |                              | -    | 150 | °C   |
| T <sub>stg</sub>  | storage temperature               |                              | −65  | 150 | °C   |

[1] Stresses beyond those listed under Limiting values may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under Recommended Operating Conditions. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

10. ESD ratings

Table 6. ESD ratings

| Symbol           | Parameter                       | Conditions                           | Value | Unit |
|------------------|---------------------------------|--------------------------------------|-------|------|
| V <sub>ESD</sub> | electrostatic discharge voltage | HBM: ANSI/ESDA/JEDEC JS-001 class 2  | ±2000 | V    |
|                  |                                 | CDM: ANSI/ESDA/JEDEC JS-002 class C3 | ±1000 | V    |

11. Recommended operating conditions

Table 7. Recommended operating conditions

| Symbol            | Parameter                | Conditions | Min | Max               | Unit |
|-------------------|--------------------------|------------|-----|-------------------|------|
| V <sub>IN</sub>   | input voltage            |            | 0.5 | V <sub>BIAS</sub> | V    |
| V <sub>BIAS</sub> | bias voltage             |            | 1.5 | 5.5               | V    |
| V <sub>EN</sub>   | enable voltage           |            | 0   | 5.5               | V    |
| V <sub>OUT</sub>  | output voltage           |            | -   | V <sub>IN</sub>   | V    |
| V <sub>IH</sub>   | HIGH level input voltage | EN pin     | 1   | 5.5               | V    |
| V <sub>IL</sub>   | LOW level input voltage  | EN pin     | 0   | 0.4               | V    |
| T <sub>amb</sub>  | ambient temperature      |            | −40 | 105               | °C   |

12. Recommended components

Table 8. Recommended components

| Symbol            | Parameter             | Conditions | Min | Typ | Max | Unit |
|-------------------|-----------------------|------------|-----|-----|-----|------|
| C <sub>IN</sub>   | capacitor on pin IN   |            | -   | 1   | -   | μF   |
| C <sub>OUT</sub>  | capacitor on pin OUT  |            | -   | 0.1 | -   | μF   |
| C <sub>BIAS</sub> | capacitor on pin BIAS |            | -   | 1   | -   | μF   |
| C <sub>SS</sub>   | capacitor on pin SS   |            | 0   | -   | 100 | nF   |

13. Static characteristics

Table 9. Static characteristics

At recommended operating conditions; voltages are referenced to GND (ground = 0 V).

| Symbol                                            | Parameter                   | Conditions                                                 | T <sub>amb</sub>  | Min | Typ  | Max | Unit |
|---------------------------------------------------|-----------------------------|------------------------------------------------------------|-------------------|-----|------|-----|------|
| Power supply and current, V <sub>BIAS</sub> = 5 V |                             |                                                            |                   |     |      |     |      |
| I <sub>Q(BIAS)</sub>                              | quiescent current           | BIAS pin; no load; V <sub>IN</sub> = V <sub>EN</sub> = 5 V | −40 °C to +105 °C | -   | 37   | 45  | μA   |
| I <sub>SD(BIAS)</sub>                             | shutdown current            | BIAS pin; V <sub>EN</sub> = V <sub>OUT</sub> = 0 V         | −40 °C to +105 °C | -   | 0.5  | 2.3 | μA   |
| I <sub>SD(IN)</sub>                               | off-state supply current    | IN pin; V <sub>EN</sub> = V <sub>OUT</sub> = 0 V           |                   |     |      |     |      |
|                                                   |                             | V <sub>IN</sub> = 5 V                                      | −40 °C to +85 °C  | -   | 0.87 | 6.9 | μA   |
|                                                   |                             |                                                            | −40 °C to +105 °C | -   | 7.3  | 22  | μA   |
|                                                   |                             | V <sub>IN</sub> = 3.3 V                                    | −40 °C to +85 °C  | -   | 0.6  | 4.5 | μA   |
|                                                   |                             |                                                            | −40 °C to +105 °C | -   | 5.2  | 15  | μA   |
|                                                   |                             | V <sub>IN</sub> = 1.8 V                                    | −40 °C to +85 °C  | -   | 0.44 | 2.5 | μA   |
|                                                   |                             |                                                            | −40 °C to +105 °C | -   | 4.2  | 8.5 | μA   |
|                                                   |                             | V <sub>IN</sub> = 0.5 V                                    | −40 °C to +85 °C  | -   | 0.33 | 2   | μA   |
|                                                   |                             |                                                            | −40 °C to +105 °C | -   | 3.3  | 7   | μA   |
| I <sub>EN</sub>                                   | input leakage current       | EN pin; V <sub>EN</sub> = 5.5 V                            | −40 °C to +105 °C | -   | -    | 0.1 | μA   |
| V <sub>EN(hys)</sub>                              | input hysteresis voltage    | EN pin; V <sub>IN</sub> = 5 V                              | 25 °C             | -   | 120  | -   | mV   |
| R <sub>PD</sub>                                   | output pull-down resistance | V <sub>IN</sub> = 5 V, V <sub>EN</sub> = 0 V               | −40 °C to +105 °C | -   | 230  | 320 | Ω    |
| T <sub>SD</sub>                                   | thermal shutdown            | junction temperature rising                                | -                 | -   | 160  | -   | °C   |
| T <sub>SD(hys)</sub>                              | thermal shutdown hysteresis | junction temperature falling                               | -                 | -   | 20   | -   | °C   |

0.5 V to 5.5 V, 6 A, 15 mΩ, single channel load switch with soft start

| Symbol                                              | Parameter                   | Conditions                                                   | T <sub>amb</sub>  | Min | Typ  | Max | Unit |
|-----------------------------------------------------|-----------------------------|--------------------------------------------------------------|-------------------|-----|------|-----|------|
| Power supply and current, V <sub>BIAS</sub> = 2.5 V |                             |                                                              |                   |     |      |     |      |
| I <sub>Q(BIAS)</sub>                                | quiescent current           | BIAS pin; no load; V <sub>IN</sub> = V <sub>EN</sub> = 2.5 V | 25 °C             | -   | 18   | 27  | μA   |
|                                                     |                             |                                                              | −40 °C to +105 °C | -   | 23   | 32  | μA   |
| I <sub>SD(BIAS)</sub>                               | shutdown current            | BIAS pin; V <sub>EN</sub> = V <sub>OUT</sub> = 0 V           | 25 °C             | -   | 0.2  | 0.6 | μA   |
|                                                     |                             |                                                              | −40 °C to +105 °C |     | 0.3  | 1   | μA   |
| I <sub>SD(IN)</sub>                                 | off-state supply current    | IN pin; V <sub>EN</sub> = V <sub>OUT</sub> = 0 V             |                   |     |      |     |      |
|                                                     |                             | V <sub>IN</sub> = 2.5 V                                      | −40 °C to +85 °C  | -   | 0.51 | 2.9 | μA   |
|                                                     |                             |                                                              | −40 °C to +105 °C | -   | 4.6  | 9.5 | μA   |
|                                                     |                             | V <sub>IN</sub> = 1.8 V                                      | −40 °C to +85 °C  | -   | 0.44 | 2.5 | μA   |
|                                                     |                             |                                                              | −40 °C to +105 °C | -   | 4.2  | 8.5 | μA   |
|                                                     |                             | V <sub>IN</sub> = 0.5 V                                      | −40 °C to +85 °C  | -   | 0.33 | 2   | μA   |
|                                                     |                             |                                                              | −40 °C to +105 °C | -   | 3.2  | 7   | μA   |
| I <sub>EN</sub>                                     | input leakage current       | EN pin; V <sub>EN</sub> = 5.5 V                              | −40 °C to +105 °C | -   | -    | 0.1 | μA   |
| V <sub>EN(hys)</sub>                                | input hysteresis voltage    | EN pin; V <sub>IN</sub> = 2.5 V                              | 25 °C             | -   | 85   | -   | mV   |
| R <sub>PD</sub>                                     | output pull-down resistance | V <sub>IN</sub> = 2.5 V, V <sub>EN</sub> = 0 V               | −40 °C to +105 °C | -   | 230  | 340 | Ω    |
| T <sub>SD</sub>                                     | thermal shutdown            | junction temperature rising                                  | -                 | -   | 160  | -   | °C   |
| T <sub>SD(hys)</sub>                                | thermal shutdown hysteresis | junction temperature falling                                 | -                 | -   | 20   | -   | °C   |

## 0.5 V to 5.5 V, 6 A, 15 mΩ, single channel load switch with soft start

| Symbol                                                    | Parameter                   | Conditions                                                   | T <sub>amb</sub>  | Min | Typ  | Max | Unit |
|-----------------------------------------------------------|-----------------------------|--------------------------------------------------------------|-------------------|-----|------|-----|------|
| <b>Power supply and current, V<sub>BIAS</sub> = 2 V</b>   |                             |                                                              |                   |     |      |     |      |
| I <sub>Q(BIAS)</sub>                                      | quiescent current           | BIAS pin; no load; V <sub>IN</sub> = V <sub>EN</sub> = 2 V   | 25 °C             | -   | 18   | 25  | μA   |
|                                                           |                             |                                                              | −40 °C to +105 °C | -   | 22   | 30  | μA   |
| I <sub>SD(BIAS)</sub>                                     | shutdown current            | BIAS pin; V <sub>EN</sub> = V <sub>OUT</sub> = 0 V           | 25 °C             | -   | 0.2  | 0.6 | μA   |
|                                                           |                             |                                                              | −40 °C to +105 °C | -   | 0.3  | 1   | μA   |
| I <sub>SD(IN)</sub>                                       | off-state supply current    | IN pin; V <sub>EN</sub> = V <sub>OUT</sub> = 0 V             |                   |     |      |     |      |
|                                                           |                             | V <sub>IN</sub> = 2 V                                        | −40 °C to +85 °C  | -   | 0.46 | 2.8 | μA   |
|                                                           |                             |                                                              | −40 °C to +105 °C | -   | 4.3  | 9.5 | μA   |
|                                                           |                             | V <sub>IN</sub> = 1.8 V                                      | −40 °C to +85 °C  | -   | 0.44 | 2.5 | μA   |
|                                                           |                             |                                                              | −40 °C to +105 °C | -   | 4.2  | 8.5 | μA   |
|                                                           |                             | V <sub>IN</sub> = 1.2 V                                      | −40 °C to +85 °C  | -   | 0.39 | 2.3 | μA   |
|                                                           |                             |                                                              | −40 °C to +105 °C | -   | 3.8  | 8   | μA   |
|                                                           |                             | V <sub>IN</sub> = 0.5 V                                      | −40 °C to +85 °C  | -   | 0.33 | 2   | μA   |
|                                                           |                             |                                                              | −40 °C to +105 °C | -   | 3.3  | 7   | μA   |
| I <sub>EN</sub>                                           | input leakage current       | EN pin; V <sub>EN</sub> = 5.5 V                              | −40 °C to +105 °C | -   | -    | 0.1 | μA   |
| V <sub>EN(hys)</sub>                                      | input hysteresis voltage    | EN pin; V <sub>IN</sub> = 2 V                                | 25 °C             | -   | 80   | -   | mV   |
| R <sub>PD</sub>                                           | output pull-down resistance | V <sub>IN</sub> = 2 V, V <sub>EN</sub> = 0 V                 | −40 °C to +125 °C | -   | 230  | 360 | Ω    |
| T <sub>SD</sub>                                           | thermal shutdown            | junction temperature rising                                  | -                 | -   | 160  | -   | °C   |
| T <sub>SD(hys)</sub>                                      | thermal shutdown hysteresis | junction temperature falling                                 | -                 | -   | 20   | -   | °C   |
| <b>Power supply and current, V<sub>BIAS</sub> = 1.5 V</b> |                             |                                                              |                   |     |      |     |      |
| I <sub>Q(BIAS)</sub>                                      | quiescent current           | BIAS pin; no load; V <sub>IN</sub> = V <sub>EN</sub> = 1.5 V | 25 °C             | -   | 57   | 70  | μA   |
|                                                           |                             |                                                              | −40 °C to +105 °C | -   | 70   | 85  | μA   |
| I <sub>SD(BIAS)</sub>                                     | shutdown current            | BIAS pin; V <sub>EN</sub> = V <sub>OUT</sub> = 0 V           | 25 °C             | -   | 0.15 | 0.5 | μA   |
|                                                           |                             |                                                              | −40 °C to +105 °C | -   | 0.2  | 1   | μA   |
| I <sub>SD(IN)</sub>                                       | off-state supply current    | IN pin; V <sub>EN</sub> = V <sub>OUT</sub> = 0 V             |                   |     |      |     |      |
|                                                           |                             | V <sub>IN</sub> = 1.5 V                                      | −40 °C to +85 °C  | -   | 0.42 | 2.5 | μA   |
|                                                           |                             |                                                              | −40 °C to +105 °C | -   | 4    | 8.5 | μA   |
|                                                           |                             | V <sub>IN</sub> = 0.5 V                                      | −40 °C to +85 °C  | -   | 0.33 | 2   | μA   |
|                                                           |                             |                                                              | −40 °C to +105 °C | -   | 3.3  | 7   | μA   |
|                                                           |                             |                                                              |                   |     |      |     |      |
| I <sub>EN</sub>                                           | input leakage current       | EN pin; V <sub>EN</sub> = 5.5 V                              | −40 °C to +105 °C | -   | -    | 0.1 | μA   |
| V <sub>EN(hys)</sub>                                      | input hysteresis voltage    | EN pin; V <sub>IN</sub> = 1.5 V                              | 25 °C             | -   | 70   | -   | mV   |
| R <sub>PD</sub>                                           | output pull-down resistance | V <sub>IN</sub> = 1.5 V, V <sub>EN</sub> = 0 V               | −40 °C to +125 °C | -   | 230  | 440 | Ω    |
| T <sub>SD</sub>                                           | thermal shutdown            | junction temperature rising                                  | -                 | -   | 160  | -   | °C   |
| T <sub>SD(hys)</sub>                                      | thermal shutdown hysteresis | junction temperature falling                                 | -                 | -   | 20   | -   | °C   |

0.5 V to 5.5 V, 6 A, 15 mΩ, single channel load switch with soft start

| Symbol                                                      | Parameter     | Conditions                                            | T <sub>amb</sub>  | Min | Typ | Max | Unit |
|-------------------------------------------------------------|---------------|-------------------------------------------------------|-------------------|-----|-----|-----|------|
| ON resistance (R <sub>ON</sub> ), V <sub>BIAS</sub> = 5 V   |               |                                                       |                   |     |     |     |      |
| R <sub>ON</sub>                                             | ON resistance | I <sub>OUT</sub> = −200 mA, V <sub>BIAS</sub> = 5 V   |                   |     |     |     |      |
|                                                             |               | V <sub>IN</sub> = 5 V                                 | 25 °C             | -   | 15  | 19  | mΩ   |
|                                                             |               |                                                       | −40 °C to +85 °C  | -   | -   | 23  | mΩ   |
|                                                             |               |                                                       | −40 °C to +105 °C | -   | -   | 25  | mΩ   |
|                                                             |               | V <sub>IN</sub> = 3.3 V                               | 25 °C             | -   | 15  | 19  | mΩ   |
|                                                             |               |                                                       | −40 °C to +85 °C  | -   | -   | 23  | mΩ   |
|                                                             |               |                                                       | −40 °C to +105 °C | -   | -   | 25  | mΩ   |
|                                                             |               | V <sub>IN</sub> = 2.5 V                               | 25 °C             | -   | 15  | 19  | mΩ   |
|                                                             |               |                                                       | −40 °C to +85 °C  | -   | -   | 23  | mΩ   |
|                                                             |               |                                                       | −40 °C to +105 °C | -   | -   | 25  | mΩ   |
|                                                             |               | V <sub>IN</sub> = 1.8 V                               | 25 °C             | -   | 15  | 19  | mΩ   |
|                                                             |               |                                                       | −40 °C to +85 °C  | -   | -   | 23  | mΩ   |
|                                                             |               |                                                       | −40 °C to +105 °C | -   | -   | 25  | mΩ   |
|                                                             |               | V <sub>IN</sub> = 1.5 V                               | 25 °C             | -   | 15  | 19  | mΩ   |
|                                                             |               |                                                       | −40 °C to +85 °C  | -   | -   | 23  | mΩ   |
|                                                             |               |                                                       | −40 °C to +105 °C | -   | -   | 25  | mΩ   |
|                                                             |               | V <sub>IN</sub> = 1.2 V                               | 25 °C             | -   | 15  | 19  | mΩ   |
|                                                             |               |                                                       | −40 °C to +85 °C  | -   | -   | 23  | mΩ   |
|                                                             |               |                                                       | −40 °C to +105 °C | -   | -   | 25  | mΩ   |
|                                                             |               | V <sub>IN</sub> = 0.5 V                               | 25 °C             | -   | 15  | 19  | mΩ   |
|                                                             |               |                                                       | −40 °C to +85 °C  | -   | -   | 23  | mΩ   |
|                                                             |               |                                                       | −40 °C to +105 °C | -   | -   | 25  | mΩ   |
| ON resistance (R <sub>ON</sub> ); V <sub>BIAS</sub> = 2.5 V |               |                                                       |                   |     |     |     |      |
| R <sub>ON</sub>                                             | ON resistance | I <sub>OUT</sub> = −200 mA, V <sub>BIAS</sub> = 2.5 V |                   |     |     |     |      |
|                                                             |               | V <sub>IN</sub> = 2.5 V                               | 25 °C             | -   | 20  | 26  | mΩ   |
|                                                             |               |                                                       | −40 °C to +85 °C  | -   | -   | 32  | mΩ   |
|                                                             |               |                                                       | −40 °C to +105 °C | -   | -   | 34  | mΩ   |
|                                                             |               | V <sub>IN</sub> = 1.8 V                               | 25 °C             | -   | 18  | 23  | mΩ   |
|                                                             |               |                                                       | −40 °C to +85 °C  | -   | -   | 29  | mΩ   |
|                                                             |               |                                                       | −40 °C to +105 °C | -   | -   | 31  | mΩ   |
|                                                             |               | V <sub>IN</sub> = 1.5 V                               | 25 °C             | -   | 18  | 22  | mΩ   |
|                                                             |               |                                                       | −40 °C to +85 °C  | -   | -   | 28  | mΩ   |
|                                                             |               |                                                       | −40 °C to +105 °C | -   | -   | 30  | mΩ   |
|                                                             |               | V <sub>IN</sub> = 1.2 V                               | 25 °C             | -   | 18  | 22  | mΩ   |
|                                                             |               |                                                       | −40 °C to +85 °C  | -   | -   | 27  | mΩ   |
|                                                             |               |                                                       | −40 °C to +105 °C | -   | -   | 29  | mΩ   |
|                                                             |               | V <sub>IN</sub> = 0.5 V                               | 25 °C             | -   | 17  | 21  | mΩ   |
|                                                             |               |                                                       | −40 °C to +85 °C  | -   | -   | 26  | mΩ   |
|                                                             |               |                                                       | −40 °C to +105 °C | -   | -   | 27  | mΩ   |

| Symbol                                                      | Parameter     | Conditions                                            | T <sub>amb</sub>        | Min              | Typ | Max | Unit |    |
|-------------------------------------------------------------|---------------|-------------------------------------------------------|-------------------------|------------------|-----|-----|------|----|
| ON resistance (R <sub>ON</sub> ); V <sub>BIAS</sub> = 2 V   |               |                                                       |                         |                  |     |     |      |    |
| R <sub>ON</sub>                                             | ON resistance | I <sub>OUT</sub> = −200 mA, V <sub>BIAS</sub> = 2 V   |                         |                  |     |     |      |    |
|                                                             |               |                                                       | V <sub>IN</sub> = 1.8 V | 25 °C            | -   | 20  | -    | mΩ |
|                                                             |               |                                                       |                         | −40 °C to +85 °C | -   | -   | -    | mΩ |
|                                                             |               | −40 °C to +105 °C                                     |                         | -                | -   | 35  | mΩ   |    |
|                                                             |               | V <sub>IN</sub> = 1.2 V                               | 25 °C                   | -                | 20  | -   | mΩ   |    |
|                                                             |               |                                                       | −40 °C to +85 °C        | -                | -   | -   | mΩ   |    |
|                                                             |               |                                                       | −40 °C to +105 °C       | -                | -   | 35  | mΩ   |    |
|                                                             |               | V <sub>IN</sub> = 0.5 V                               | 25 °C                   | -                | 20  | -   | mΩ   |    |
|                                                             |               |                                                       | −40 °C to +85 °C        | -                | -   | -   | mΩ   |    |
| −40 °C to +105 °C                                           | -             |                                                       | -                       | 35               | mΩ  |     |      |    |
| ON resistance (R <sub>ON</sub> ); V <sub>BIAS</sub> = 1.5 V |               |                                                       |                         |                  |     |     |      |    |
| R <sub>ON</sub>                                             | ON resistance | I <sub>OUT</sub> = −200 mA, V <sub>BIAS</sub> = 1.5 V |                         |                  |     |     |      |    |
|                                                             |               |                                                       | V <sub>IN</sub> = 1.5 V | 25 °C            | -   | 22  | -    | mΩ |
|                                                             |               |                                                       |                         | −40 °C to +85 °C | -   | -   | -    | mΩ |
|                                                             |               | −40 °C to +105 °C                                     |                         | -                | -   | 36  | mΩ   |    |
|                                                             |               | V <sub>IN</sub> = 1.2 V                               | 25 °C                   | -                | 22  | -   | mΩ   |    |
|                                                             |               |                                                       | −40 °C to +85 °C        | -                | -   | -   | mΩ   |    |
|                                                             |               |                                                       | −40 °C to +105 °C       | -                | -   | 36  | mΩ   |    |
|                                                             |               | V <sub>IN</sub> = 0.5 V                               | 25 °C                   | -                | 22  | -   | mΩ   |    |
|                                                             |               |                                                       | −40 °C to +85 °C        | -                | -   | -   | mΩ   |    |
| −40 °C to +105 °C                                           | -             |                                                       | -                       | 36               | mΩ  |     |      |    |

14. Dynamic characteristics

Table 10. Dynamic characteristics

At recommended operating conditions; voltages are referenced to GND (ground = 0 V);

| Symbol           | Parameter        | Conditions                                                                                                                                                         | T <sub>amb</sub> = 25 °C |      |     | Unit |
|------------------|------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|------|-----|------|
|                  |                  |                                                                                                                                                                    | Min                      | Typ  | Max |      |
| t <sub>ON</sub>  | turn ON time     | R <sub>L</sub> = 10 Ω, C <sub>L</sub> = 0.1 μF, C <sub>IN</sub> = 1 μF, C <sub>SS</sub> = 1 nF, V <sub>EN</sub> = 5 V, 50% V <sub>EN</sub> to 50% V <sub>OUT</sub> |                          |      |     |      |
|                  |                  | V <sub>IN</sub> = V <sub>BIAS</sub> = 5 V                                                                                                                          | -                        | 1450 | -   | μs   |
|                  |                  | V <sub>IN</sub> = V <sub>BIAS</sub> = 2.5                                                                                                                          | -                        | 2180 | -   | μs   |
| t <sub>OFF</sub> | turn OFF time    | R <sub>L</sub> = 10 Ω, C <sub>L</sub> = 0.1 μF, C <sub>IN</sub> = 1 μF, C <sub>SS</sub> = 1 nF, V <sub>EN</sub> = 5 V, 50% V <sub>EN</sub> to 50% V <sub>OUT</sub> |                          |      |     |      |
|                  |                  | V <sub>IN</sub> = V <sub>BIAS</sub> = 5 V                                                                                                                          | -                        | 2    | -   | μs   |
|                  |                  | V <sub>IN</sub> = V <sub>BIAS</sub> = 2.5                                                                                                                          | -                        | 2    | -   | μs   |
| t <sub>R</sub>   | output rise time | R <sub>L</sub> = 10 Ω, C <sub>L</sub> = 0.1 μF, C <sub>IN</sub> = 1 μF, C <sub>SS</sub> = 1 nF, V <sub>EN</sub> = 5 V, 50% V <sub>EN</sub> to 50% V <sub>OUT</sub> |                          |      |     |      |
|                  |                  | V <sub>BIAS</sub> = 5 V, V <sub>IN</sub> = 1.5 V                                                                                                                   | -                        | 595  | -   | μs   |
|                  |                  | V <sub>BIAS</sub> = 5 V, V <sub>IN</sub> = 1.8 V                                                                                                                   | -                        | 700  | -   | μs   |
|                  |                  | V <sub>BIAS</sub> = 5 V, V <sub>IN</sub> = 3.3 V                                                                                                                   | -                        | 1190 | -   | μs   |
|                  |                  | V <sub>BIAS</sub> = 5 V, V <sub>IN</sub> = 5 V                                                                                                                     | -                        | 1750 | -   | μs   |
|                  |                  | V <sub>BIAS</sub> = 2.5 V, V <sub>IN</sub> = 2.5 V                                                                                                                 | -                        | 2150 | -   | μs   |
| t <sub>F</sub>   | output fall time | R <sub>L</sub> = 10 Ω, C <sub>L</sub> = 0.1 μF, C <sub>IN</sub> = 1 μF, C <sub>SS</sub> = 1 nF, V <sub>EN</sub> = 5 V, 50% V <sub>EN</sub> to 50% V <sub>OUT</sub> |                          |      |     |      |
|                  |                  | V <sub>BIAS</sub> = 5 V, V <sub>IN</sub> = 5 V                                                                                                                     | -                        | 2    | -   | μs   |
|                  |                  | V <sub>BIAS</sub> = 2.5 V, V <sub>IN</sub> = 2.5 V                                                                                                                 | -                        | 2    | -   | μs   |

0.5 V to 5.5 V, 6 A, 15 mΩ, single channel load switch with soft start

| Symbol             | Parameter     | Conditions                                                                                                                                                         | T <sub>amb</sub> = 25 °C |      |     | Unit |
|--------------------|---------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|------|-----|------|
|                    |               |                                                                                                                                                                    | Min                      | Typ  | Max |      |
| t <sub>D(EN)</sub> | EN delay time | R <sub>L</sub> = 10 Ω, C <sub>L</sub> = 0.1 μF, C <sub>IN</sub> = 1 μF, C <sub>SS</sub> = 1 nF, V <sub>EN</sub> = 5 V, 50% V <sub>EN</sub> to 50% V <sub>OUT</sub> |                          |      |     |      |
|                    |               | V <sub>BIAS</sub> = 5 V, V <sub>IN</sub> = 5 V                                                                                                                     | -                        | 600  | -   | μs   |
|                    |               | V <sub>BIAS</sub> = 2.5 V, V <sub>IN</sub> = 2.5 V                                                                                                                 | -                        | 1120 | -   | μs   |

14.1. Typical characteristics

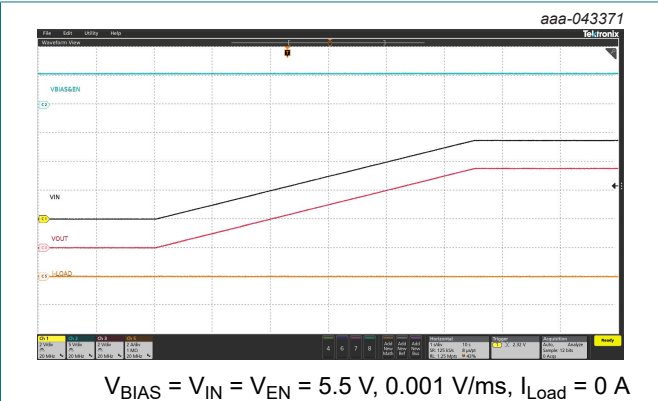


Fig. 5. Turn ON V<sub>IN</sub>

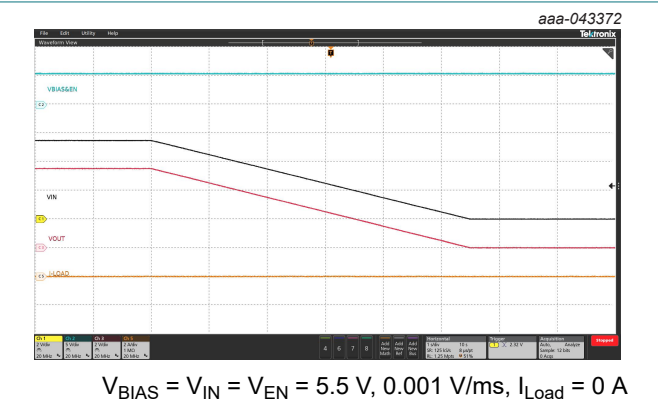


Fig. 6. Turn OFF V<sub>IN</sub>

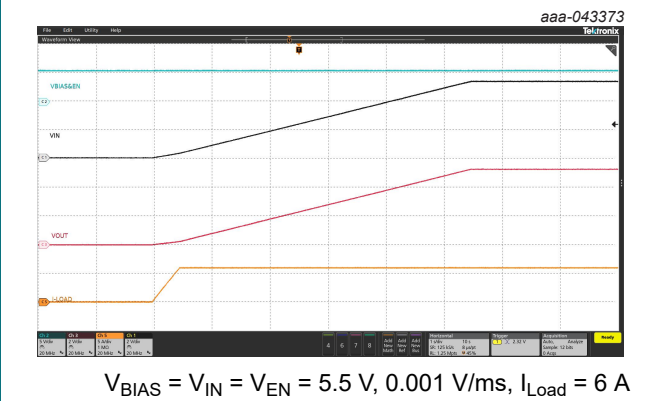


Fig. 7. Turn ON V<sub>IN</sub>

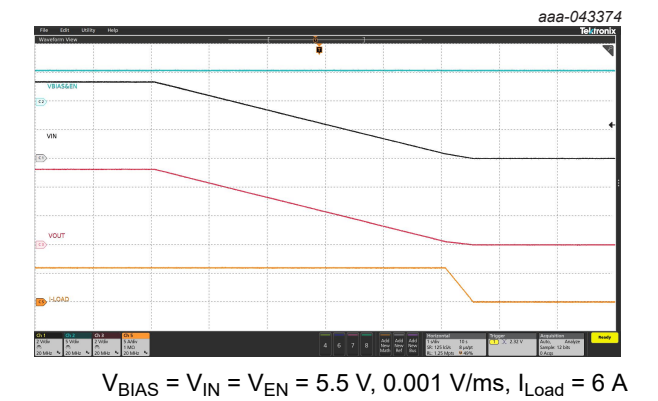


Fig. 8. Turn OFF V<sub>IN</sub>

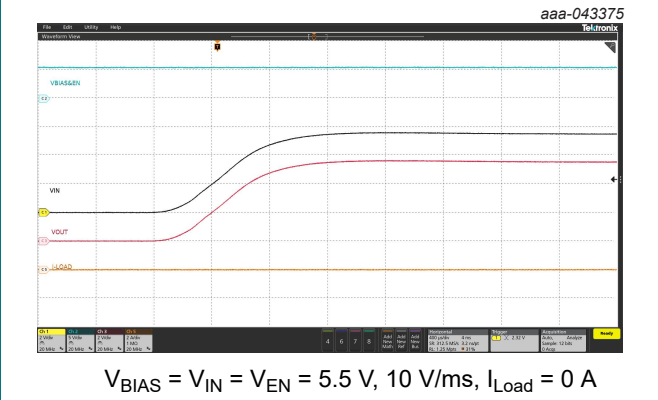


Fig. 9. Turn ON V<sub>IN</sub>



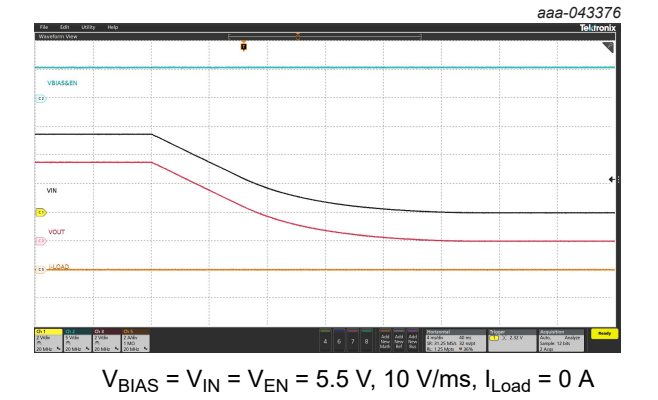


Fig. 10. Turn OFF V<sub>IN</sub>

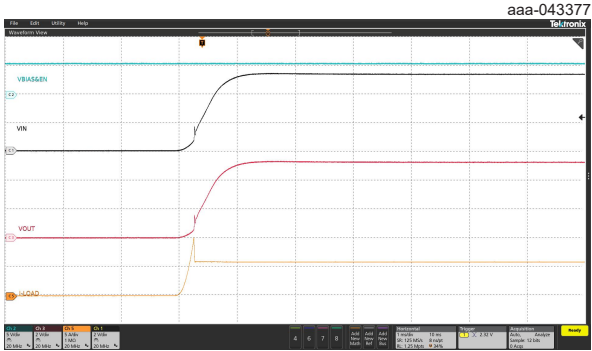


$V_{BIAS} = V_{IN} = V_{EN} = 5.5\text{ V}$ ,  $10\text{ V/ms}$ ,  $I_{Load} = 6\text{ A}$

Fig. 11. Turn ON  $V_{IN}$

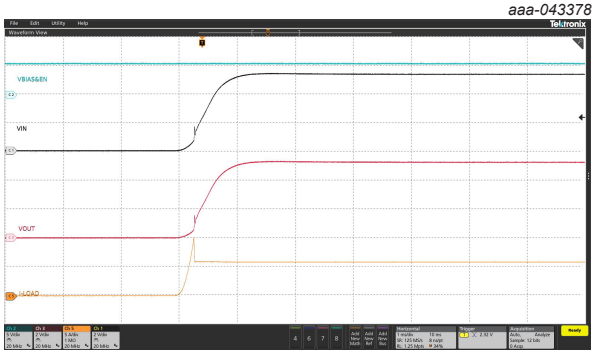


$V_{BIAS} = V_{IN} = V_{EN} = 5.5\text{ V}$ ,  $10\text{ V/ms}$ ,  $I_{Load} = 6\text{ A}$

Fig. 12. Turn OFF  $V_{IN}$

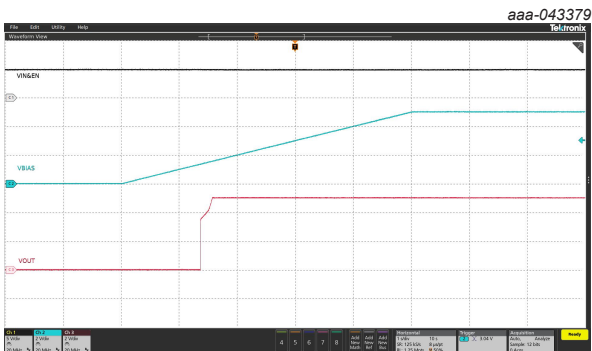


$V_{BIAS} = V_{IN} = V_{EN} = 5\text{ V}$ ,  $0.001\text{ V/ms}$ ,  $I_{Load} = 0\text{ A}$

Fig. 13. Turn ON  $V_{BIAS}$

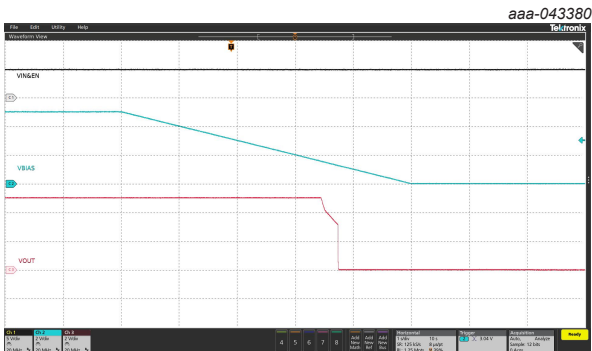


$V_{BIAS} = V_{IN} = V_{EN} = 5\text{ V}$ ,  $0.001\text{ V/ms}$ ,  $I_{Load} = 0\text{ A}$

Fig. 14. Turn OFF  $V_{BIAS}$

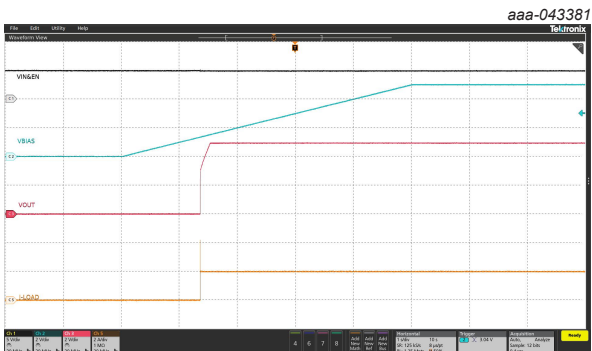


$V_{BIAS} = V_{IN} = V_{EN} = 5\text{ V}$ ,  $0.001\text{ V/ms}$ ,  $I_{Load} = 2\text{ A}$

Fig. 15. Turn ON  $V_{BIAS}$

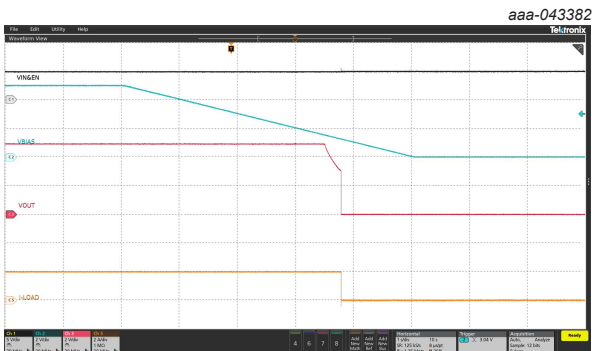


$V_{BIAS} = V_{IN} = V_{EN} = 5\text{ V}$ ,  $0.001\text{ V/ms}$ ,  $I_{Load} = 2\text{ A}$

Fig. 16. Turn OFF  $V_{BIAS}$

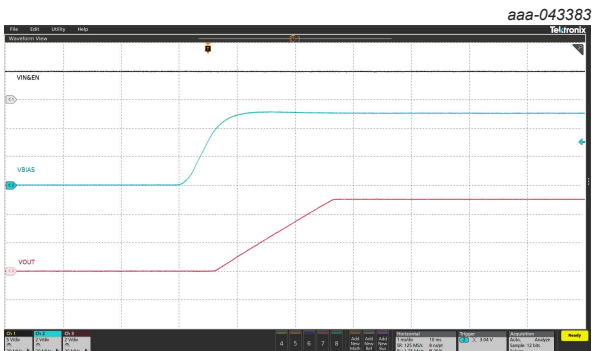

$V_{BIAS} = V_{IN} = V_{EN} = 5\text{ V}$ ,  $10\text{ V/ms}$ ,  $I_{Load} = 0\text{ A}$







Fig. 17. Turn ON  $V_{BIAS}$

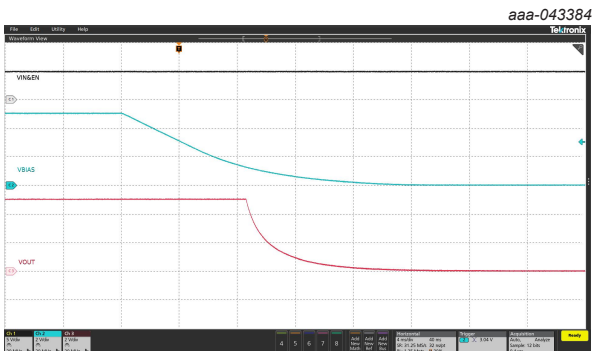


$V_{BIAS} = V_{IN} = V_{EN} = 5\text{ V}$ ,  $10\text{ V/ms}$ ,  $I_{Load} = 0\text{ A}$

Fig. 18. Turn OFF  $V_{BIAS}$


0.5 V to 5.5 V, 6 A, 15 mΩ, single channel load switch with soft start

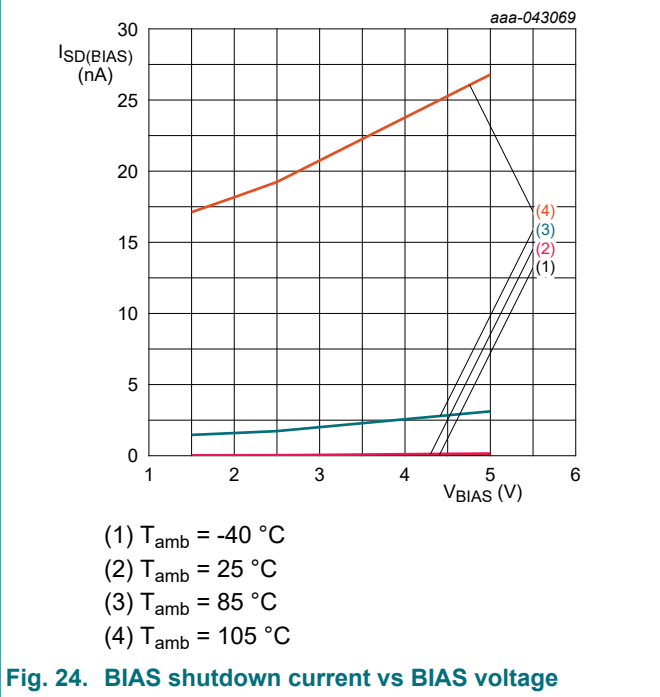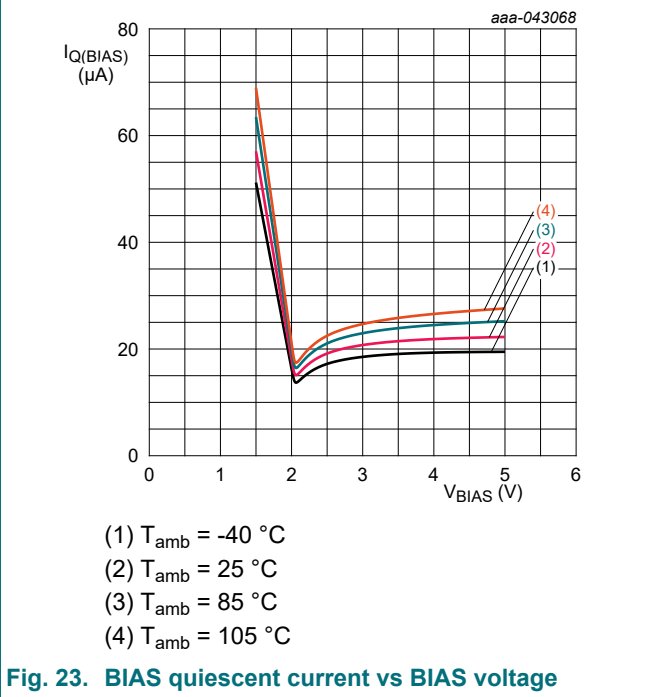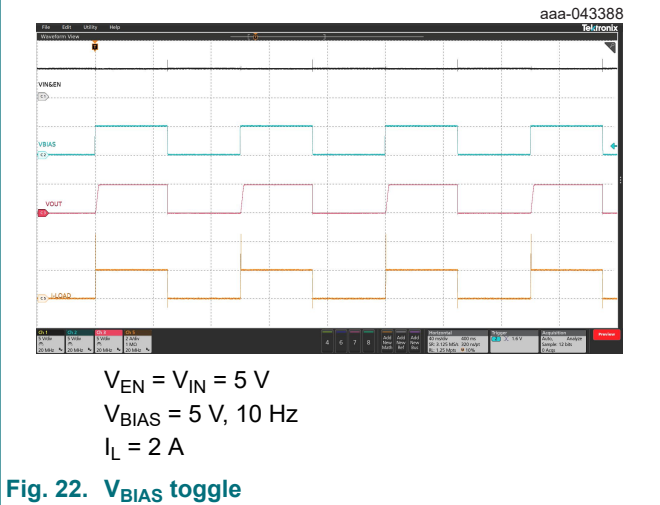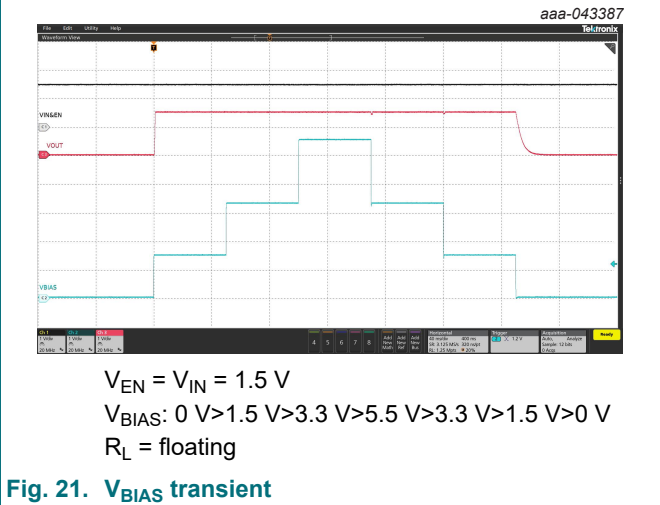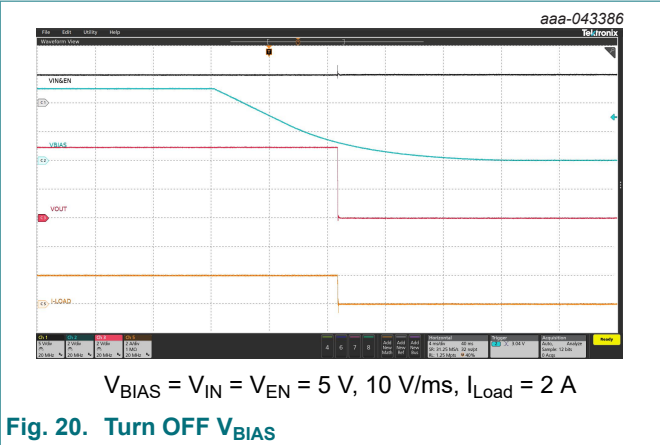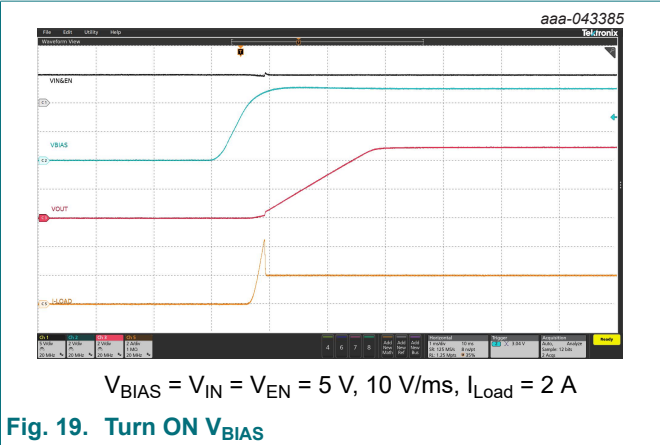

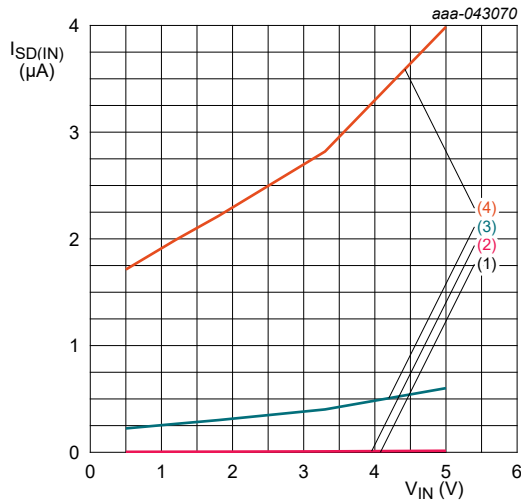


- (1)  $T_{amb} = -40\text{ °C}$   
 (2)  $T_{amb} = 25\text{ °C}$   
 (3)  $T_{amb} = 85\text{ °C}$   
 (4)  $T_{amb} = 105\text{ °C}$

Fig. 25. VIN OFF-state supply current vs input voltage

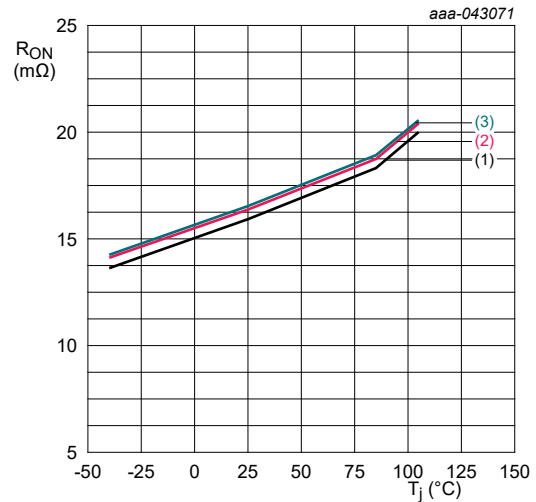


- $V_{BIAS} = 1.5\text{ V}$   
 (1)  $V_{IN} = 0.5\text{ V}$   
 (2)  $V_{IN} = 1.2\text{ V}$   
 (3)  $V_{IN} = 1.5\text{ V}$

Fig. 26. ON resistance vs ambient temperature

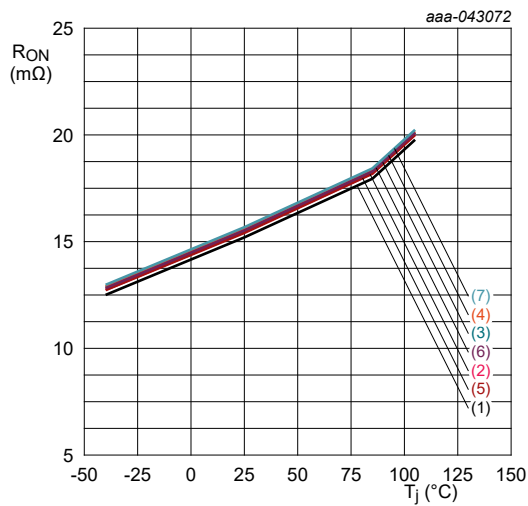

- $V_{BIAS} = 5\text{ V}$   
 (1)  $V_{IN} = 0.5\text{ V}$ ; (2)  $V_{IN} = 1.2\text{ V}$   
 (3)  $V_{IN} = 1.5\text{ V}$ ; (4)  $V_{IN} = 1.8\text{ V}$   
 (5)  $V_{IN} = 2.5\text{ V}$ ; (6)  $V_{IN} = 3.3\text{ V}$   
 (7)  $V_{IN} = 5\text{ V}$


Fig. 27. ON resistance vs ambient temperature

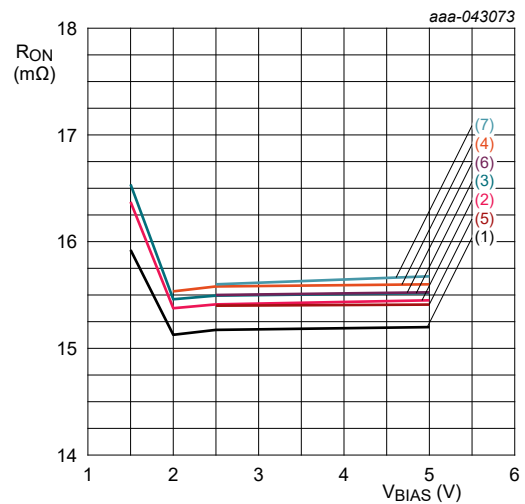

- (1)  $V_{IN} = 0.5\text{ V}$ ; (2)  $V_{IN} = 1.2\text{ V}$   
 (3)  $V_{IN} = 1.5\text{ V}$ ; (4)  $V_{IN} = 1.8\text{ V}$   
 (5)  $V_{IN} = 2.5\text{ V}$ ; (6)  $V_{IN} = 3.3\text{ V}$   
 (7)  $V_{IN} = 5\text{ V}$

Fig. 28. ON resistance vs BIAS voltage

0.5 V to 5.5 V, 6 A, 15 mΩ, single channel load switch with soft start

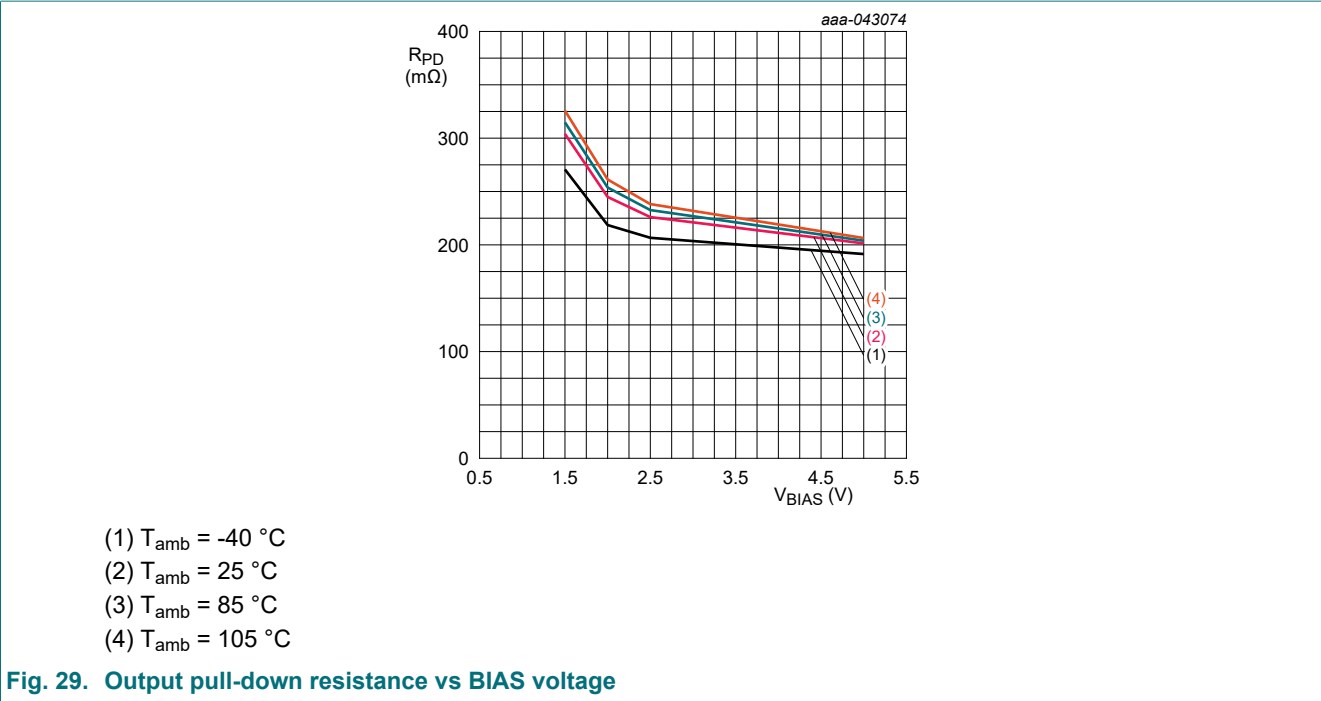

## 15. Detailed description

### 15.1. Overview

The NPS3005 consists of a 6 A rated N-channel MOSFET (NMOS) transistor with single-channel. The device has configured adjustable slew rate for specific soft start. The OUT pin will be pulled low when the device is disabled. NPS3005 also has thermal shutdown to prevent any damage from overheating.

### 15.2. Functional diagram

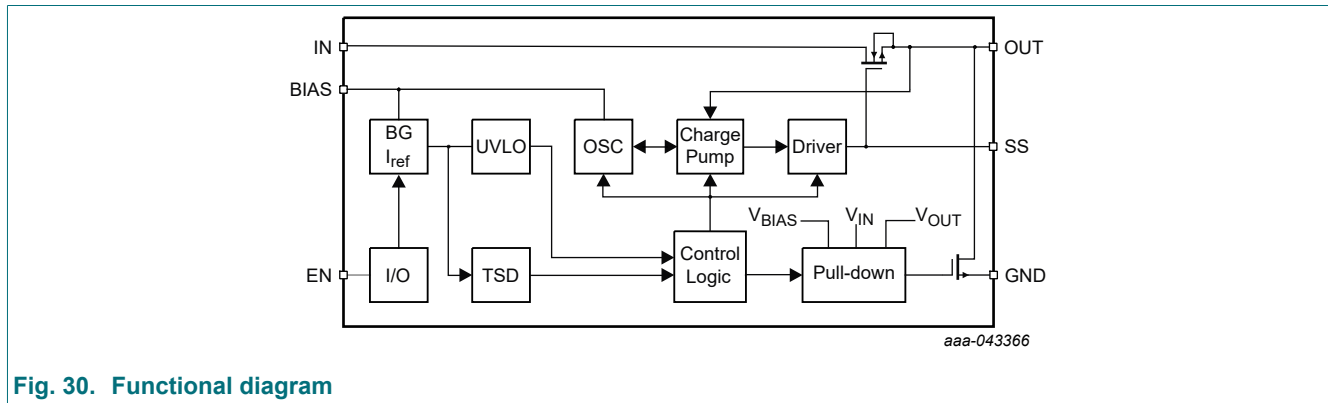


Fig. 30. Functional diagram

### 15.3. Feature description

#### Enable (EN)

The logic enable (pin EN) circuit controls the power switch, a logic high (above 1 V) enables the internal MOSFET. The EN input is compatible with both TTL and CMOS logic levels.

#### Bias voltage range

To obtain a stable ON resistance, the NPS3005 introduces an additional bias pin, which is connected to the charge pump inside the chip to provide a stable supply voltage for the internal MOSFET.

It is highly recommended to keep the IN pin voltage not larger than the BIAS pin voltage. The device will still be functional if  $V_{IN} > V_{BIAS}$  but the ON resistance will be larger.

#### Adjustable Soft Start

NPS3005 has built in adjustable Soft Start which helps to reduce output current peak, thus to reduce the voltage drop of the input voltage. Soft start time can be adjusted via an external capacitor connected between SS pin and GND. The quick output discharge feature not only prevents output pin from being floating when disabled but also helps to adjust falling time with an external resistor.

#### Quick output discharge

An internal 230 Ω pull-down resistor is connected between OUT pin and GND when the NPS3005 is disabled to prevent the OUT pin from being floating.

## 16. Application information

The typical application circuit is shown in [Fig. 31](#). Component selection is explained below.


### Input Capacitor

A capacitor of 10  $\mu\text{F}$  or higher value is recommended to be placed close to the IN pins of NPS3005. This capacitor can reduce the voltage drop caused by the in-rush current during the turn-on transient of the load switch. A higher value capacitor can be used to further reduce the voltage drop during high-current application.

### Output Capacitor

A capacitor of 1  $\mu\text{F}$  or higher value is recommended to be placed between the OUT pins and GND. The switching times are affected by the capacitance. A larger capacitor makes the initial turn-on transient smoother. This capacitor must be large enough to supply a fast transient load to prevent the output from dropping.

### Typical Application

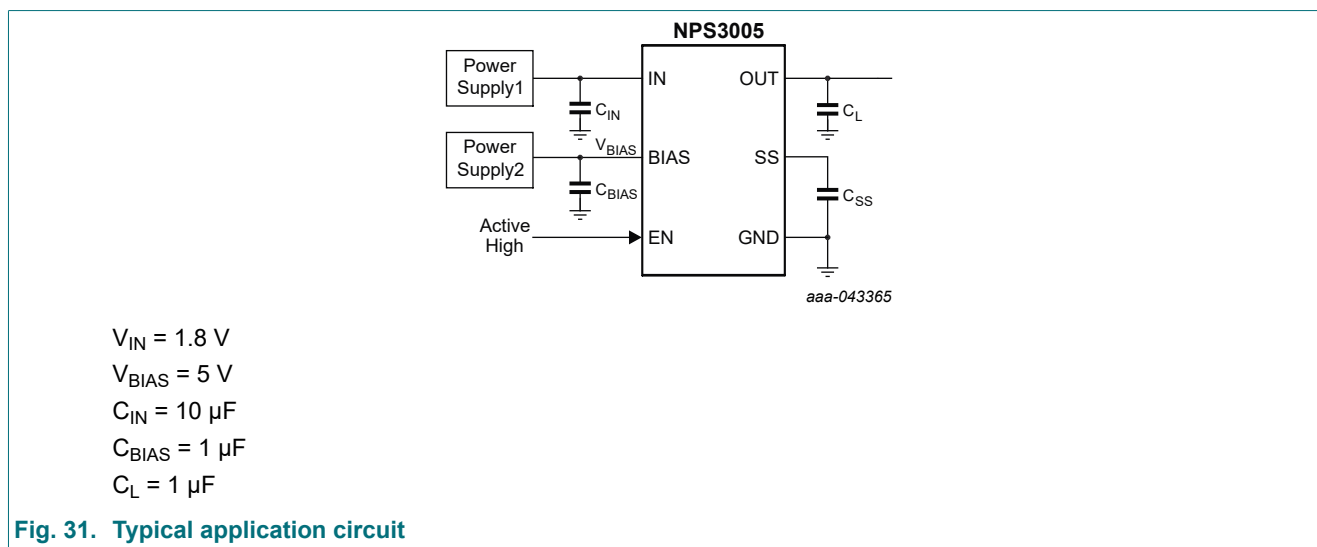

## 17. Layout

### Power supply recommendations

The NPS3005 is designed to operate with a  $V_{IN}$  range of 0.5 V to 5.5 V,  $V_{BIAS}$  range of 1.5 V to 5.5 V. The  $V_{IN}$  and  $V_{BIAS}$  power supply must be well regulated and placed as close to the device terminal as possible. The power supply must be able to withstand all transient load current steps. In most situations, using an input capacitance ( $C_{IN}$ ) of 1  $\mu$ F is sufficient to prevent the supply voltage from dipping when the switch is turned on. In cases where the power supply is slow to respond to a large transient current or large load current step, additional bulk capacitance may be required on the input.

### Layout guidelines

For best performance, all traces must be as short as possible. To be most effective, the input and output capacitors must be placed close to the device to minimize the effects that parasitic trace inductances may have on normal operation. Using wide traces for  $V_{IN}$ ,  $V_{OUT}$ , and GND helps minimize the parasitic electrical effects.

### Layout example

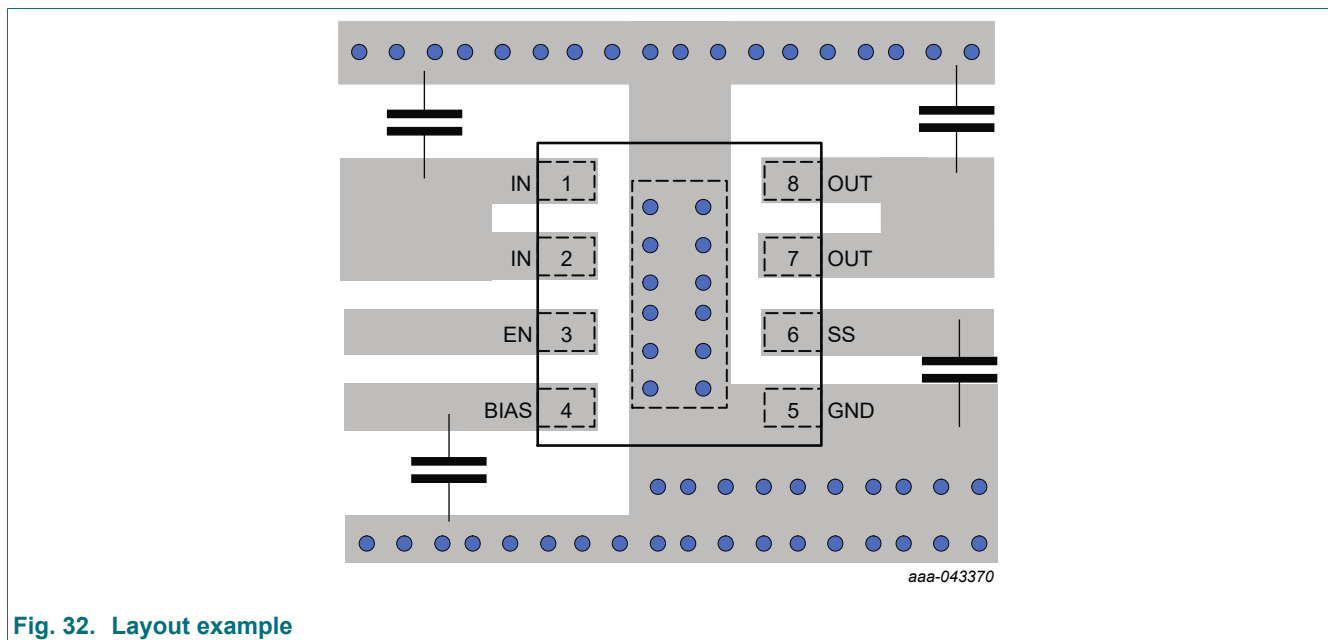


Fig. 32. Layout example

## 18. Thermal considerations

The maximum IC junction temperature should be restricted to 150 °C under normal operating conditions. To calculate the maximum allowable dissipation,  $P_{D(max)}$  for a given output current and ambient temperature, the equation as shown below can be used:

$$P_{D(MAX)} = \frac{T_{j(MAX)} - T_{amb}}{\theta_{JA}}$$

Where:

$P_{D(MAX)}$  = maximum allowable power dissipation

$T_{j(MAX)}$  = maximum allowable junction temperature (150 °C for the NPS3005 devices)

$T_{amb}$  = ambient temperature of the device

$\theta_{JA}$  = junction to air thermal impedance. This parameter is highly dependent upon board layout.

19. Package outline

**HWSON8: plastic thermal enhanced very very thin Small Outline packages, no leads; 8 terminals;**  
**0.5 mm pitch; 2.0 mm x 2.0 mm x 0.75 mm body**

SOT8067-1

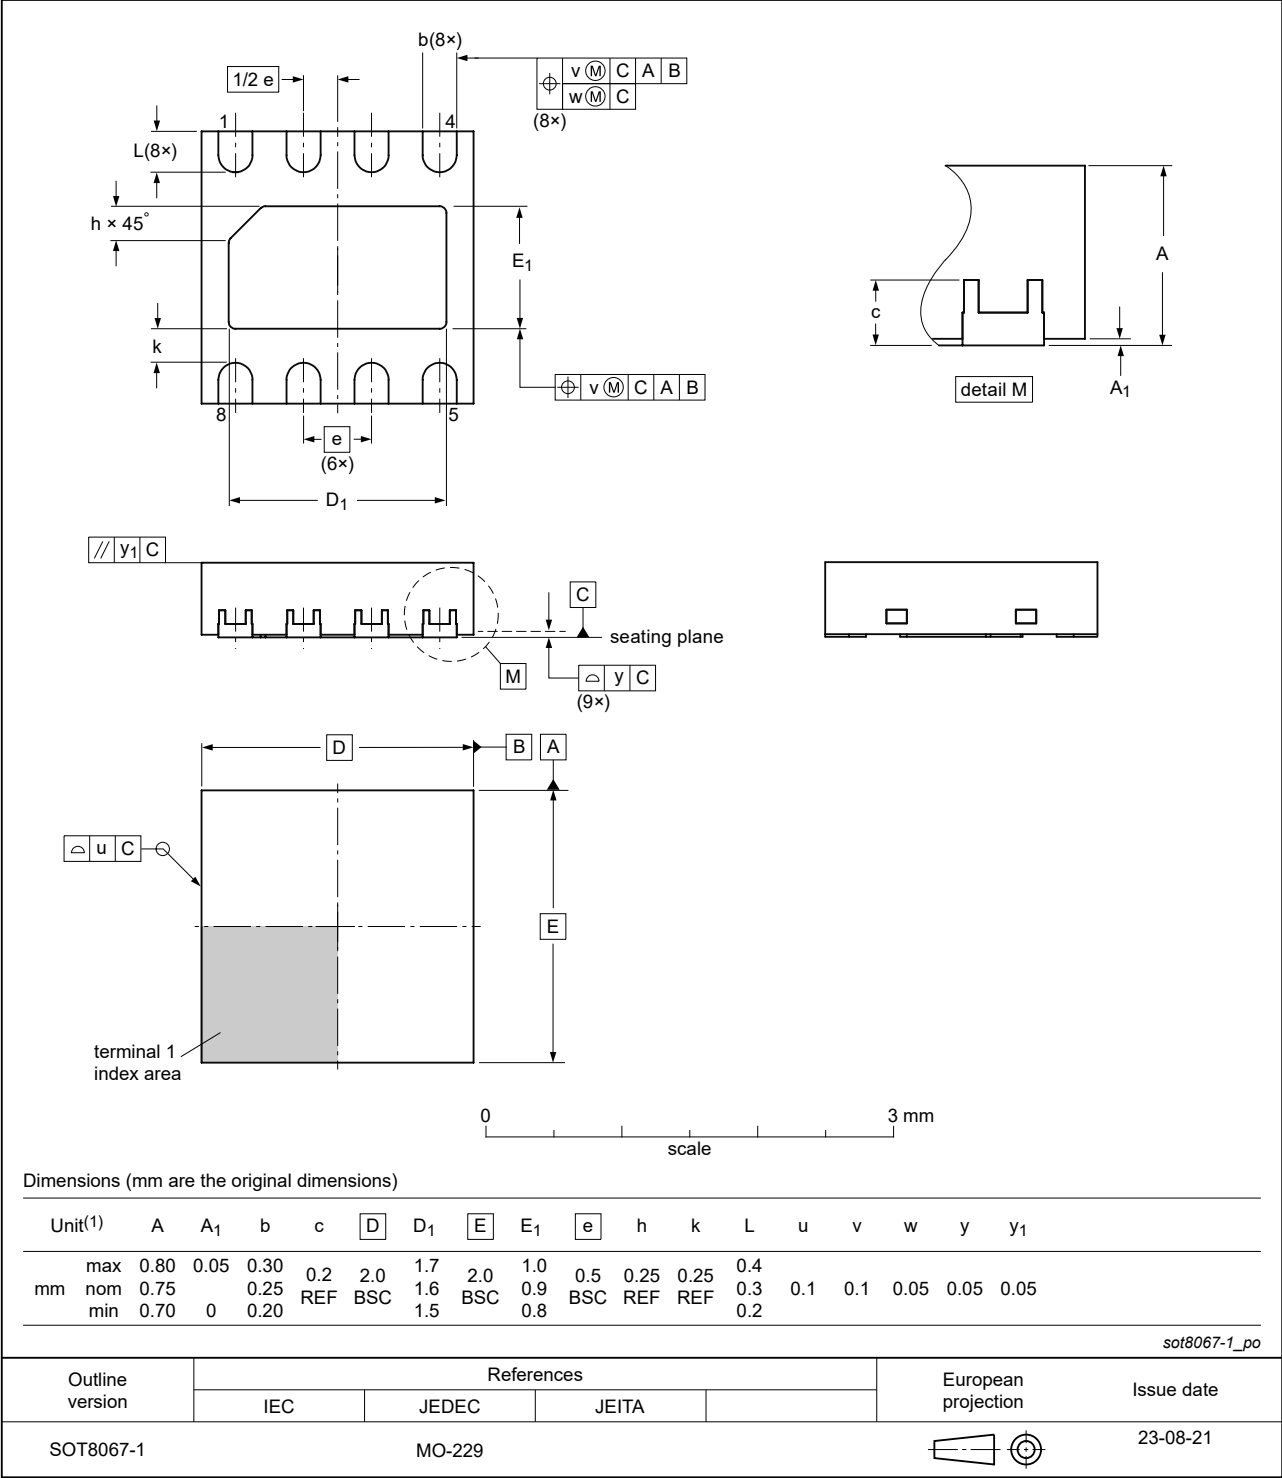


Fig. 33. Package outline SOT8067-1 (HWSON8)

20. Abbreviations

Table 11. Abbreviations

| Acronym | Description                             |
|---------|-----------------------------------------|
| CMOS    | Complementary Metal Oxide Semiconductor |
| TTL     | Transistor-Transistor Logic             |
| HBM     | Human Body Model                        |
| ESD     | ElectroStatic Discharge                 |

21. Revision history

Table 12. Revision history

| Document ID    | Release date                                                                                                          | Data sheet status  | Change notice | Supersedes |
|----------------|-----------------------------------------------------------------------------------------------------------------------|--------------------|---------------|------------|
| NPS3005 v.1.1  | 20250610                                                                                                              | Product data sheet | -             | -          |
| Modifications: | • <a href="#">Fig. 1</a> , <a href="#">Fig. 4</a> , <a href="#">Fig. 28</a> and <a href="#">Fig. 31</a> have changed. |                    |               |            |
| NPS3005 v.1.2  | 20250604                                                                                                              | Product data sheet | -             | -          |

## 22. Legal information

### Data sheet status

| Document status [1][2]         | Product status [3] | Definition                                                                            |
|--------------------------------|--------------------|---------------------------------------------------------------------------------------|
| Objective [short] data sheet   | Development        | This document contains data from the objective specification for product development. |
| Preliminary [short] data sheet | Qualification      | This document contains data from the preliminary specification.                       |
| Product [short] data sheet     | Production         | This document contains the product specification.                                     |

- [1] Please consult the most recently issued document before initiating or completing a design.
- [2] The term 'short data sheet' is explained in section "Definitions".
- [3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the internet at <https://www.nexperia.com>.

### Definitions

**Draft** — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. Nexperia does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

**Short data sheet** — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local Nexperia sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

**Product specification** — The information and data provided in a Product data sheet shall define the specification of the product as agreed between Nexperia and its customer, unless Nexperia and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the Nexperia product is deemed to offer functions and qualities beyond those described in the Product data sheet.

### Disclaimers

**Limited warranty and liability** — Information in this document is believed to be accurate and reliable. However, Nexperia does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. Nexperia takes no responsibility for the content in this document if provided by an information source outside of Nexperia.

In no event shall Nexperia be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, Nexperia's aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the Terms and conditions of commercial sale of Nexperia.

**Right to make changes** — Nexperia reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

**Suitability for use** — Nexperia products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an Nexperia product can reasonably be expected to result in personal

injury, death or severe property or environmental damage. Nexperia and its suppliers accept no liability for inclusion and/or use of Nexperia products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

**Quick reference data** — The Quick reference data is an extract of the product data given in the Limiting values and Characteristics sections of this document, and as such is not complete, exhaustive or legally binding.

**Applications** — Applications that are described herein for any of these products are for illustrative purposes only. Nexperia makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using Nexperia products, and Nexperia accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the Nexperia product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

Nexperia does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using Nexperia products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). Nexperia does not accept any liability in this respect.

**Limiting values** — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

**Terms and conditions of commercial sale** — Nexperia products are sold subject to the general terms and conditions of commercial sale, as published at <http://www.nexperia.com/profile/terms>, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. Nexperia hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of Nexperia products by customer.

**No offer to sell or license** — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

**Export control** — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

**Non-automotive qualified products** — Unless this data sheet expressly states that this specific Nexperia product is automotive qualified, the product is not suitable for automotive use. It is neither qualified nor tested in accordance with automotive testing or application requirements. Nexperia accepts no liability for inclusion and/or use of non-automotive qualified products in automotive equipment or applications.

In the event that customer uses the product for design-in and use in automotive applications to automotive specifications and standards, customer (a) shall use the product without Nexperia's warranty of the product for such automotive applications, use and specifications, and (b) whenever customer uses the product for automotive applications beyond Nexperia's specifications such use shall be solely at customer's own risk, and (c) customer fully indemnifies Nexperia for any liability, damages or failed product claims resulting from customer design and use of the product for automotive applications beyond Nexperia's standard warranty and Nexperia's product specifications.

**Translations** — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

**Trademarks**

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

Contents

1. General description..... 1

2. Features and benefits..... 1

3. Applications..... 1

4. Ordering information.....2

5. Marking.....2

6. Selection guide..... 2

7. Functional diagram.....2

8. Pinning information.....3

8.1. Pinning.....3

8.2. Pin description..... 3

9. Limiting values..... 4

10. ESD ratings..... 4

11. Recommended operating conditions..... 4

12. Recommended components.....4

13. Static characteristics.....5

14. Dynamic characteristics..... 9

14.1. Typical characteristics.....10

15. Detailed description..... 15

15.1. Overview..... 15

15.2. Functional diagram..... 15

15.3. Feature description..... 15

16. Application information..... 16

17. Layout..... 17

18. Thermal considerations..... 17

19. Package outline..... 18

20. Abbreviations..... 19

21. Revision history.....19

22. Legal information.....20

© Nexperia B.V. 2025. All rights reserved

For more information, please visit: <http://www.nexperia.com>

For sales office addresses, please send an email to: [salesaddresses@nexperia.com](mailto:salesaddresses@nexperia.com)

Date of release: 10 June 2025