


SMAJ



Automotive grade 400 W Transient voltage suppressor



Product features

- Automotive grade (AEC-Q101 qualified)
- Low profile SMA package
- Excellent clamping capability
- High reliability application
- 400 W peak pulse power capability at 10/1000 μ s waveform
- Typical I_R less than 1 μ A above 10 V
- Fast response time: typically less than 1.0 ps from 0 V to V_{BR} minimum
- Plastic package meets UL 94 V-0 flammability rating
- Meets moisture sensitivity level (MSL) level 1
- Terminal: tin plated, solderable per J-STD-002
- UL 497B recognized.
File No. : E198449 Guide QVGQ2

PIN configuration



Applications


- Automotive chassis and safety systems
- Advanced driver assistance systems (ADAS)
- Communication and infotainment systems
- Network systems and body electronics
- Power Train controls
- xEV and battery systems

Environmental compliance and general specifications


- AEC-Q101 qualified



Ordering part number

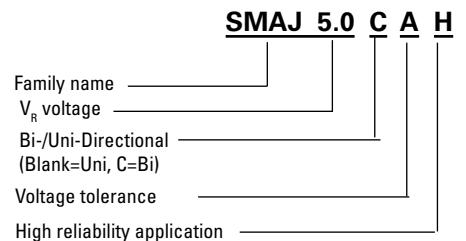

Alternate ordering part number

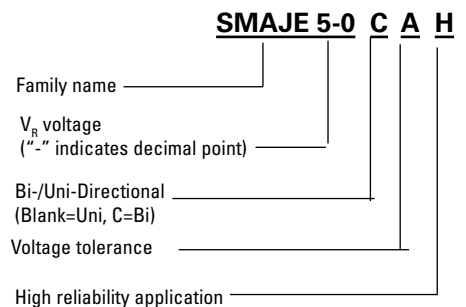


Absolute maximum ratings

(+25 °C, RH=45%-75%, unless otherwise noted)

Parameter	Symbol	Value	Unit
Storage operating junction temperature range	T_{STG}/T_J	-55 to +150	°C
Steady state power dissipation at $T_L = +75$ °C	$P_{M(AV)}$	3.3	W
Peak pulse power dissipation on 10/1000 μ s waveform	P_{PP}	400	W
Maximum instantaneous forward voltage at 100 A for unidirectional	V_F	5	V
Peak forward surge current, 8.3 ms single half sine wave ¹	I_{FSM}	60	A
Typical thermal resistance junction to lead	$R_{\theta JL}$	30	°C/W
Typical thermal resistance junction to ambient	$R_{\theta JA}$	120	°C/W

1. Measured on 8.3 ms single half sine wave or equivalent square wave for unidirectional device only, duty cycle = 4 per minute maximum

Mechanical parameters, pad layout- mm/inches

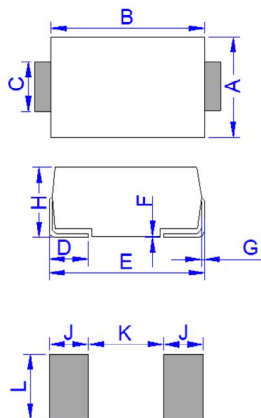

Dimension	Millimeters		Inches	
	Minimum	Maximum	Minimum	Maximum
A	2.60	3.00	0.102	0.118
B	4.15	4.65	0.163	0.183
C	1.25	1.65	0.049	0.065
D	0.95	1.52	0.037	0.060
E	4.90	5.30	0.193	0.209
F	0.051	0.203	0.002	0.008
G	0.15	0.31	0.006	0.012
H	2.00	2.44	0.079	0.096
J	2.00	-	0.079	-
K	-	2.30	-	0.091
L	1.80	-	0.071	-

Part marking




Cathode band (uni-polar only)
Part marking: xx = Refer to marking designator listed in Electrical Characteristics table
yyyy- date code

Packaging information - mm/inches

Drawing not to scale.

Supplied in tape and reel packaging, 5,000 parts per 13" diameter reel (EIA-481 compliant)

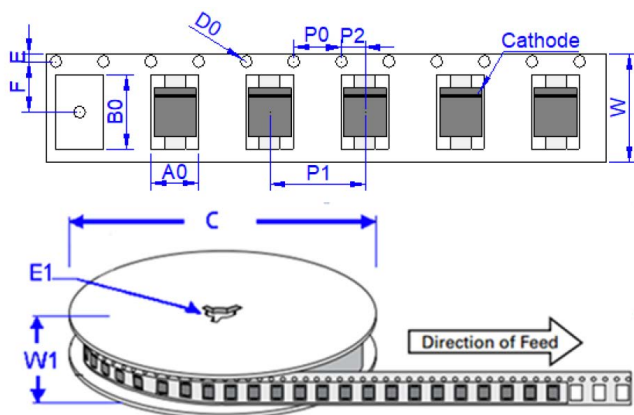

Dimensions	Millimeters	Inches
A0	2.79 ± 0.3	0.110 ± 0.012
B0	5.33 ± 0.3	0.210 ± 0.012
C	330.0	13.0
D0	1.55 ± 0.1	0.061 ± 0.004
E	1.75 ± 0.2	0.069 ± 0.008
E1	13.3 ± 0.3	0.524 ± 0.012
F	5.50 ± 0.2	0.217 ± 0.008
P0	4.00 ± 0.2	0.157 ± 0.008
P1	4.00 ± 0.2	0.157 ± 0.008
P2	2.00 ± 0.2	0.079 ± 0.008
W	12.0 ± 0.2	0.042 ± 0.008
W1	15.7 ± 2.0	0.618 ± 0.079

SMAJ
Automotive grade 400 W Transient voltage suppressor

Technical Data ELX1062
Effective September 2024


Electrical specifications (+25 °C)

Part number		Marking		V_R	$I_R @ V_R$	$V_{BR} @ I_T$		I_T	$V_C @ I_{PP}$	I_{PP}
Uni-polar	Bi-polar	Uni	Bi	(V)	(μ A)	min (V)	max (V)	(mA)	max (V)	(A)
SMAJ5.0AH	SMAJ5.0CAH	HE	TE	5	120	6.4	7	10	9.2	43.5
SMAJ6.0AH	SMAJ6.0CAH	HG	TG	6	120	6.67	7.37	10	10.3	38.8
SMAJ6.5AH	SMAJ6.5CAH	HK	TK	6.5	80	7.22	7.98	10	11.2	35.7
SMAJ7.0AH	SMAJ7.0CAH	HM	TM	7	50	7.78	8.6	10	12	33.3
SMAJ7.5AH	SMAJ7.5CAH	HP	TP	7.5	50	8.33	9.21	1	12.9	31
SMAJ8.0AH	SMAJ8.0CAH	HR	TR	8	20	8.89	9.83	1	13.6	29.4
SMAJ8.5AH	SMAJ8.5CAH	HT	TT	8.5	10	9.44	10.4	1	14.4	27.8
SMAJ9.0AH	SMAJ9.0CAH	HV	TV	9	5	10	11.1	1	15.4	26
SMAJ10AH	SMAJ10CAH	HX	TX	10	2	11.1	12.3	1	17	23.5
SMAJ11AH	SMAJ11CAH	HZ	TZ	11	1	12.2	13.5	1	18.2	22
SMAJ12AH	SMAJ12CAH	IE	UE	12	1	13.3	14.7	1	19.9	20.1
SMAJ13AH	SMAJ13CAH	IG	UG	13	1	14.4	15.9	1	21.5	18.6
SMAJ14AH	SMAJ14CAH	IK	UK	14	1	15.6	17.2	1	23.2	17.3
SMAJ15AH	SMAJ15CAH	IM	UM	15	1	16.7	18.5	1	24.4	16.4
SMAJ16AH	SMAJ16CAH	IP	UP	16	1	17.8	19.7	1	26	15.4
SMAJ17AH	SMAJ17CAH	IR	UR	17	1	18.9	20.9	1	27.6	14.5
SMAJ18AH	SMAJ18CAH	IT	UT	18	1	20	22.1	1	29.2	13.7
SMAJ20AH	SMAJ20CAH	IV	UV	20	1	22.2	24.5	1	32.4	12.4
SMAJ22AH	SMAJ22CAH	IX	UX	22	1	24.4	26.9	1	35.5	11.3
SMAJ24AH	SMAJ24CAH	IZ	UZ	24	1	26.7	29.5	1	38.9	10.3
SMAJ26AH	SMAJ26CAH	JE	VE	26	1	28.9	31.9	1	42.1	9.5
SMAJ28AH	SMAJ28CAH	JG	VG	28	1	31.1	34.4	1	45.4	8.8
SMAJ30AH	SMAJ30CAH	JK	VK	30	1	33.3	36.8	1	48.4	8.3
SMAJ33AH	SMAJ33CAH	JM	VM	33	1	36.7	40.6	1	53.3	7.5
SMAJ36AH	SMAJ36CAH	JP	VP	36	1	40	44.2	1	58.1	6.9
SMAJ40AH	SMAJ40CAH	JR	VR	40	1	44.4	49.1	1	64.5	6.2
SMAJ43AH	SMAJ43CAH	JT	VT	43	1	47.8	52.8	1	69.4	5.8
SMAJ45AH	SMAJ45CAH	JV	VV	45	1	50	55.3	1	72.7	5.5
SMAJ48AH	SMAJ48CAH	JX	VX	48	1	53.3	58.9	1	77.4	5.2
SMAJ51AH	SMAJ51CAH	JZ	VZ	51	1	56.7	62.7	1	82.4	4.9
SMAJ54AH	SMAJ54CAH	RE	WE	54	1	60	66.3	1	87.1	4.6
SMAJ58AH	SMAJ58CAH	RG	WG	58	1	64.4	71.2	1	93.6	4.3
SMAJ60AH	SMAJ60CAH	RK	WK	60	1	66.7	73.7	1	96.8	4.1
SMAJ64AH	SMAJ64CAH	RM	WM	64	1	71.1	78.6	1	103	3.9
SMAJ70AH	SMAJ70CAH	RP	WP	70	1	77.8	86	1	113	3.6
SMAJ75AH	SMAJ75CAH	RR	WR	75	1	83.3	92.1	1	121	3.3
SMAJ78AH	SMAJ78CAH	RT	WT	78	1	86.7	95.8	1	126	3.2
SMAJ85AH	SMAJ85CAH	RV	VV	85	1	94.4	104	1	137	2.9
SMAJ90AH	SMAJ90CAH	RX	WX	90	1	100	111	1	146	2.8
SMAJ100AH	SMAJ100CAH	RZ	WZ	100	1	111	123	1	162	2.5
SMAJ110AH	SMAJ110CAH	SE	XE	110	1	122	135	1	177	2.3
SMAJ120AH	SMAJ120CAH	SG	XG	120	1	133	147	1	193	2.1
SMAJ130AH	SMAJ130CAH	SK	XK	130	1	144	159	1	209	1.9
SMAJ150AH	SMAJ150CAH	SM	XM	150	1	167	185	1	243	1.7
SMAJ160AH	SMAJ160CAH	SP	XP	160	1	178	197	1	259	1.6
SMAJ170AH	SMAJ170CAH	SR	XR	170	1	189	209	1	275	1.5
SMAJ180AH	SMAJ180CAH	ST	XT	180	1	201	222	1	292	1.4
SMAJ200AH	SMAJ200CAH	SX	XX	200	1	224	247	1	324	1.3
SMAJ220AH	SMAJ220CAH	ZE	YE	220	1	246	272	1	356	1.1
SMAJ250AH	SMAJ250CAH	ZG	YG	250	1	279	309	1	405	1
SMAJ300AH	SMAJ300CAH	ZK	YK	300	1	335	371	1	486	0.8
SMAJ350AH	SMAJ350CAH	ZM	YM	350	1	391	432	1	567	0.7
SMAJ400AH	SMAJ400CAH	ZP	YP	400	1	447	494	1	648	0.6
SMAJ440AH	SMAJ440CAH	ZR	YR	440	1	492	543	1	713	0.6


Note: Standard part numbers listed. Alternate part numbers have the addition of an E and a "-" for the "-" where applicable. Example standard part number SMAJ5.0AH, Alternate part number SMAJE5-0AH

Ratings and V-I characteristic curves (+25 °C unless otherwise noted)

V- I curve characteristics (Uni-directional)

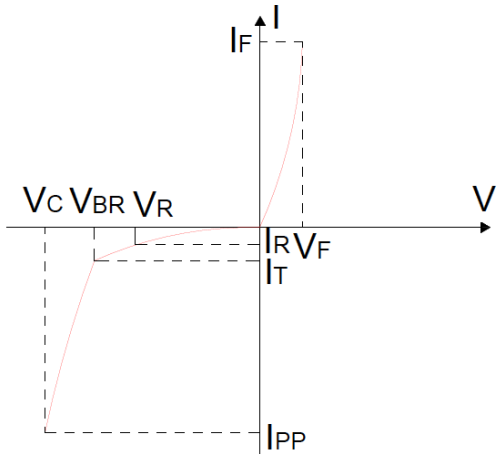

V- I curve characteristics (Bi-directional)

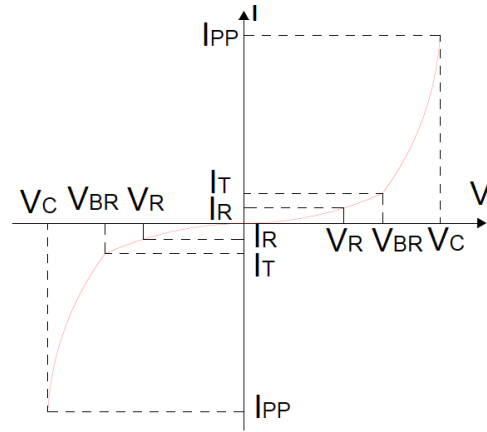

Surge waveform: 10/1000 μ s

V_R : Stand-off voltage – Maximum voltage that can be applied

V_{BR} : Breakdown voltage


V_C : Clamping voltage – Peak voltage measured across the suppressor at a specified I_{PP}

I_R : Reverse leakage current


I_T : Test current

V_F : Forward voltage drop for Uni-directional


Pulse waveform

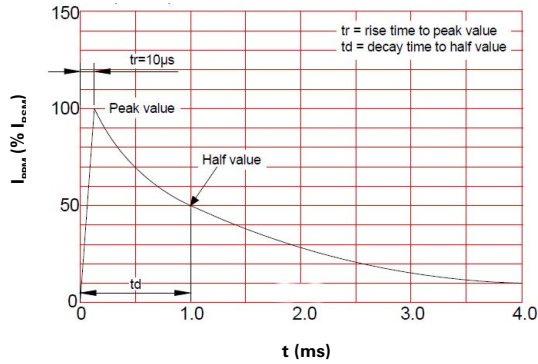

Pulse derating curve

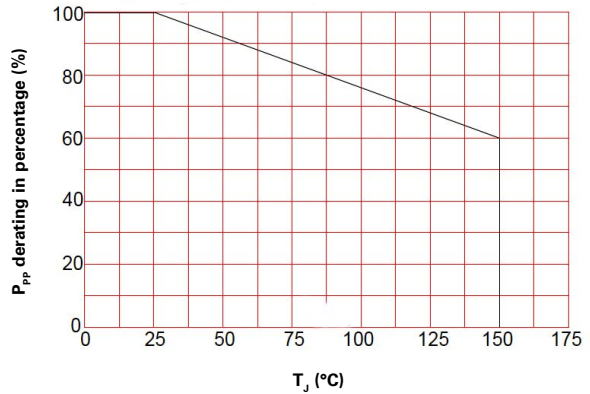

Peak pulse power dissipation curve

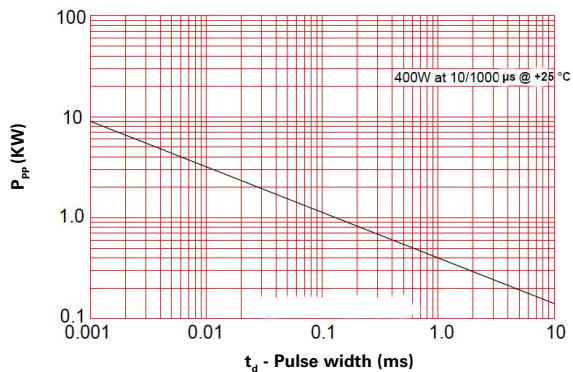

Solder reflow profile



Table 1 - Standard SnPb solder (T_C)

Package thickness	Volume mm ³ <350	Volume mm ³ ≥350
<2.5 mm	235 °C	220 °C
≥2.5 mm	220 °C	220 °C

Table 2 - Lead (Pb) free solder (T_C)

Package thickness	Volume mm ³ <350	Volume mm ³ 350 - 2000	Volume mm ³ >2000
<1.6 mm	260 °C	260 °C	260 °C
1.6 – 2.5 mm	260 °C	250 °C	245 °C
>2.5 mm	250 °C	245 °C	245 °C

Reference J-STD-020

Profile feature	Standard SnPb solder	Lead (Pb) free solder
Preheat and soak		
• Temperature min. (T_{smin})	100 °C	150 °C
• Temperature max. (T_{smax})	150 °C	200 °C
• Time (T_{smin} to T_{smax}) (t_s)	60-120 seconds	60 - 180 seconds
Ramp up rate T_L to T_p	3 °C/ second max.	3 °C/ second max.
Liquidous temperature (T_L)	183 °C	217 °C
Time (t_L) maintained above T_L	60-150 seconds	60-150 seconds
Peak package body temperature (T_p)*	Table 1	Table 2 (+0, -5 °C)
Time (t_p)* within 5 °C of the specified classification temperature (T_C)	20 seconds*	40 seconds*
Ramp-down rate (T_p to T_L)	6 °C/ second max.	6 °C/ second max.
Time 25 °C to peak temperature	6 minutes max.	8 minutes max.

* Tolerance for peak profile temperature (T_p) is defined as a supplier minimum and a user maximum.

Life Support Policy: Eaton does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin.

Eaton
Electronics Division
1000 Eaton Boulevard
Cleveland, OH 44122
United States
Eaton.com/electronics

© 2024 Eaton
All Rights Reserved
Printed in USA
Publication No. ELX1062
September 2024

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

Follow us on social media to get the latest product and support information.

