


### Features

- High voltage
- High current capability
- Low leakage current
- High surge capability
- Low cost

### Mechanical Data

- Case : DO-41 Molded plastic
- Epoxy : UL94V-O rate flame retardant
- Lead : Axial lead solderable per MIL-STD-202, Method 208 guaranteed
- Polarity : Color band denotes cathode end
- Mounting position : Any
- Weight : 0.339 gram

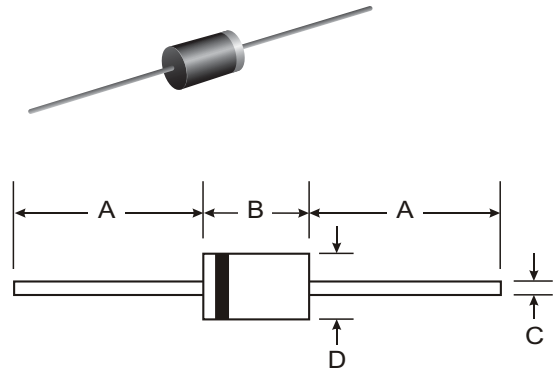

DO-41		
Dim	Min	Max
A	25.40	—
B	4.06	5.21
C	0.71	0.864
D	2.00	2.72
All Dimensions in mm		

### Maximum Ratings and Electrical Characteristics @ T<sub>A</sub> = 25°C unless otherwise specified

Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Characteristic	Symbol	R1500	R2000	R3000	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V <sub>RRM</sub> V <sub>RWM</sub> V <sub>R</sub>	1500	2000	3000	V
RMS Reverse Voltage	V <sub>R(RMS)</sub>	1050	1400	2100	V
Average Rectified Output Current (Note 1) @ T <sub>L</sub> = 55°C	I <sub>O</sub>	500		200	mA
Non-Repetitive Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I <sub>FSM</sub>	30		25	A
Forward Voltage @ I <sub>F</sub> = 500mA @ I <sub>F</sub> = 200mA	V <sub>FM</sub>	2.0 —		3.0	V
Peak Reverse Leakage Current at Rated DC Blocking Voltage	I <sub>RM</sub>	5.0			μA
Typical Junction Capacitance (Note 2)	C <sub>j</sub>	8.0		7.0	pF
Typical Thermal Resistance Junction to Ambient	R <sub>θJA</sub>	70		117	K/W
Operating and Storage Temperature Range	T <sub>j</sub> , T <sub>STG</sub>	-65 to +125			°C

- Notes: 1. Valid provided that leads are kept at ambient temperature at a distance of 9.5mm from the case.  
2. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.

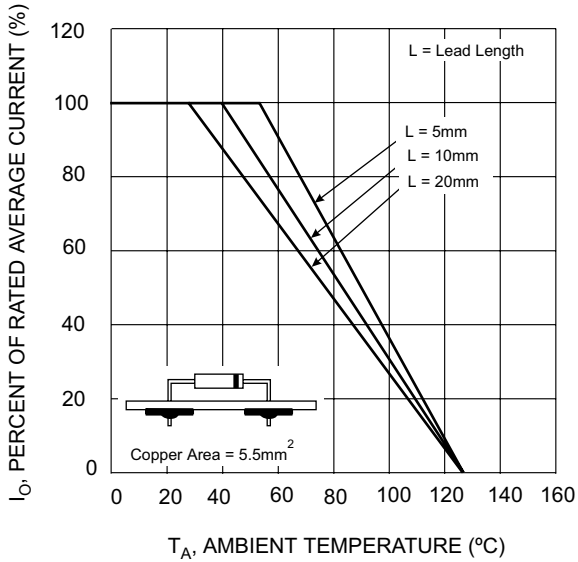


Fig. 1 Current Derating for Various Lead Lengths

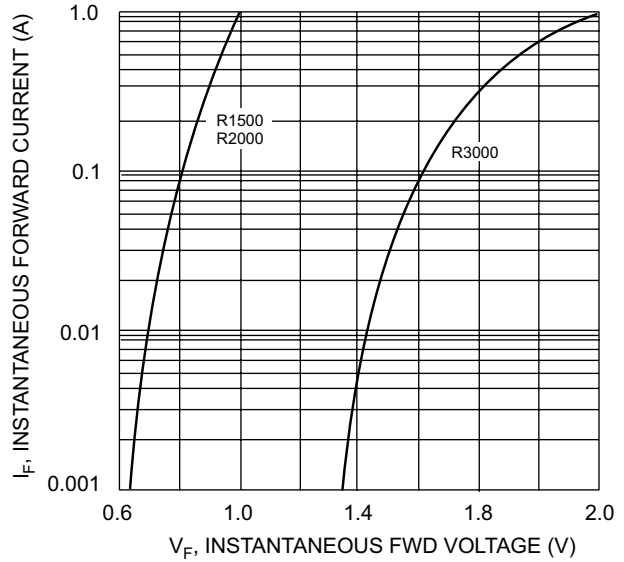


Fig. 2 Typical Forward Characteristics

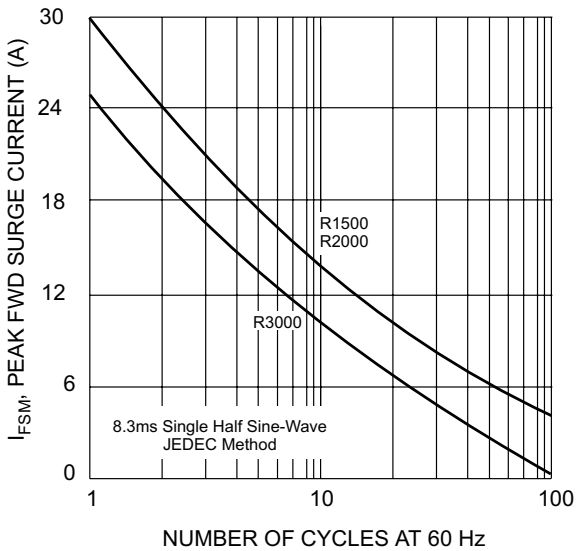


Fig. 3 Peak Fwd Surge Current vs # of Cycles @ 60 Hz

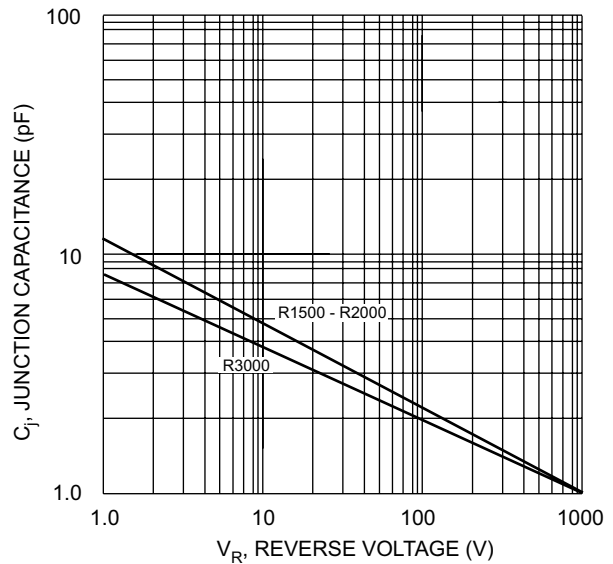


Fig. 4 Typical Junction Capacitance