

---

### Features

---


- Ultra-Fast Switching Speed
- High Reverse Breakdown Voltage
- Low Forward Voltage Drop
- Guard Ring Junction Protection

---

### Mechanical Data

---

- Case: SOD-80/LL34, Glass
- Terminals: Solderable per MIL-STD-202, Method 208
- Polarity: Cathode Band
- Weight: 0.05 grams (approx.)

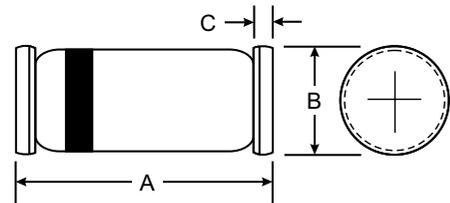

LL34/ SOD-80		
Dim	Min	Max
<b>A</b>	3.30	3.70
<b>B</b>	1.30	1.60
<b>C</b>	0.28	0.50
<b>All Dimensions in mm</b>		

---

### Maximum Ratings @ T<sub>A</sub> = 25°C unless otherwise specified

---

Characteristic	Symbol	LL5711	Unit
Peak Repetitive Reverse Voltage	V <sub>RRM</sub>	70	V
Working Peak Reverse Voltage	V <sub>RWM</sub>		
DC Blocking Voltage	V <sub>R</sub>		
RMS Reverse Voltage	V <sub>R(RMS)</sub>	49	V
Forward Continuous Current (Note 1)	I <sub>FM</sub>	15	mA
Power Dissipation (Note 1)	P <sub>d</sub>	250	mW
Thermal Resistance, Junction to Ambient Air (Note 1)	R <sub>θJA</sub>	600	K/W
Operating and Storage Temperature Range	T <sub>j</sub> , T <sub>STG</sub>	-65 to +175	°C

---

### Electrical Characteristics @ T<sub>A</sub> = 25°C unless otherwise specified

---

Characteristic	Symbol	Min	Max	Unit	Test Condition
Reverse Breakdown Voltage	V <sub>(BR)R</sub>	70	—	V	I <sub>R</sub> = 10μA
Reverse Leakage Current	I <sub>R</sub>	—	200	nA	V <sub>R</sub> = 50V
Forward Voltage Drop	V <sub>F</sub>	—	0.41 1.00	V	I <sub>F</sub> = 1.0mA I <sub>F</sub> = 15mA
Junction Capacitance	C <sub>j</sub>	—	2.0	pF	V <sub>R</sub> = 0V, f = 1.0MHz
Reverse Recovery Time	t <sub>rr</sub>	—	1.0	ns	I <sub>F</sub> = I <sub>R</sub> = 5.0mA, I <sub>rr</sub> = 0.1 x I <sub>R</sub> , R <sub>L</sub> = 100Ω

Note: 1. Valid provided that electrodes are kept at ambient temperature.