



### Features

- High saturation voltage
- Complementary to FMMT493
- Excellent  $h_{FE}$  linearity

HF

### Mechanical Data

- Case: SOT-23
- Molding Compound: UL Flammability Classification Rating 94V-0
- Terminals: Matte tin-plated leads; solderability-per MIL-STD-202, Method 208

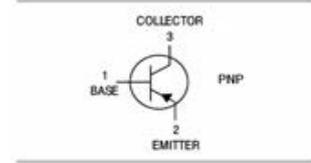

SOT-23

### Ordering Information

Part Number	Package	Shipping Quantity	Marking Code
FMMT593	SOT-23	3000 pcs / Tape & Reel	593

### Maximum Ratings (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Value	Unit
Collector-Base Breakdown Voltage	$V_{CBO}$	-120	V
Collector-Emitter Breakdown Voltage	$V_{CEO}$	-100	V
Emitter-Base Breakdown Voltage	$V_{EBO}$	-5	V
Collector Current (continuous)	$I_C$	-1	A

### Thermal Characteristics

Parameter	Symbol	Value	Unit
Power Dissipation ( $T_A = 25^\circ\text{C}$ )	$P_{tot}$	500	mW
Thermal Resistance Junction-to-Air <sup>*1</sup>	$R_{\theta JA}$	274	$^\circ\text{C/W}$
Thermal Resistance Junction-to-Case <sup>*1</sup>	$R_{\theta JC}$	127	$^\circ\text{C/W}$
Thermal Resistance Junction-to-Lead <sup>*1</sup>	$R_{\theta JL}$	180	$^\circ\text{C/W}$
Junction Temperature Range	$T_J$	-55 ~ +150	$^\circ\text{C}$
Storage Temperature Range	$T_{STG}$	-55 ~ +150	$^\circ\text{C}$

Note 1: The data tested by surface mounted on a 15mm \* 15mm \* 2mm FR4-epoxy P.C.B

### Electrical Characteristics (@ T<sub>A</sub> = 25°C unless otherwise specified)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Collector-Base Breakdown Voltage	V <sub>(BR)CBO</sub>	I <sub>C</sub> = -100μA, I <sub>E</sub> = 0	-120	-	-	V
Collector-Emitter Breakdown Voltage	V <sub>(BR)CEO</sub>	I <sub>C</sub> = -10mA, I <sub>B</sub> = 0	-100	-	-	V
Emitter-Base Breakdown Voltage	V <sub>(BR)EBO</sub>	I <sub>E</sub> = -100μA, I <sub>C</sub> = 0	-5	-	-	V
Collector Cut-off Current	I <sub>CBO</sub>	V <sub>CB</sub> = -100V, I <sub>E</sub> = 0	-	-	-0.1	μA
Emitter Cut-off Current	I <sub>EBO</sub>	V <sub>EB</sub> = -4V, I <sub>C</sub> = 0	-	-	-0.1	μA
DC Current Gain	h <sub>FE</sub>	V <sub>CE</sub> = -5V, I <sub>C</sub> = -1mA	100	-	-	-
		V <sub>CE</sub> = -5V, I <sub>C</sub> = -250mA	100	-	-	-
		V <sub>CE</sub> = -5V, I <sub>C</sub> = -500mA	100	-	300	-
		V <sub>CE</sub> = -5V, I <sub>C</sub> = -1A	50	-	-	-
Collector-emitter Saturation Voltage	V <sub>CE(sat)</sub>	I <sub>C</sub> = -250mA, I <sub>B</sub> = -25mA	-	-	-0.2	V
		I <sub>C</sub> = -500mA, I <sub>B</sub> = -50mA	-	-	-0.3	V
Base-emitter Saturation Voltage	V <sub>BE(sat)</sub>	I <sub>C</sub> = -500mA, I <sub>B</sub> = -50mA	-	-	-1.1	V
Base-emitter Voltage	V <sub>BE(on)</sub>	V <sub>CE</sub> = -5V, I <sub>C</sub> = -1A	-	-	-1.0	V
Transition Frequency	f <sub>T</sub>	I <sub>C</sub> = -50mA, V <sub>CE</sub> = -10V f = 100MHz	50	-	-	MHz
Output Capacitance	C <sub>ob</sub>	V <sub>CB</sub> = -10V, I <sub>E</sub> = 0A, f = 1MHz	-	-	5	pF

Ratings and Characteristics Curves (@  $T_A = 25^\circ\text{C}$  unless otherwise specified)

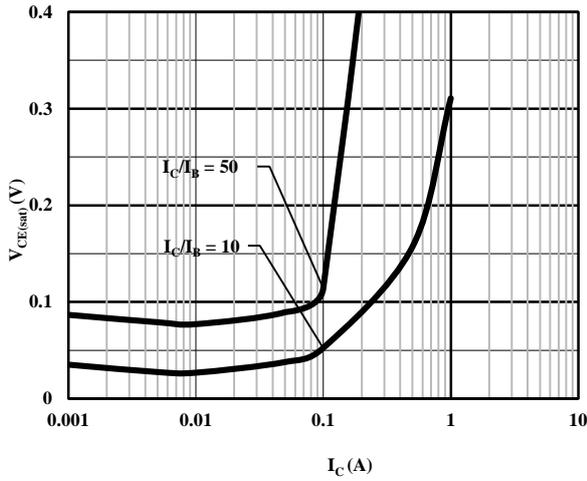


Fig. 1 Collector-Emitter Saturation Voltage vs. Collector Current

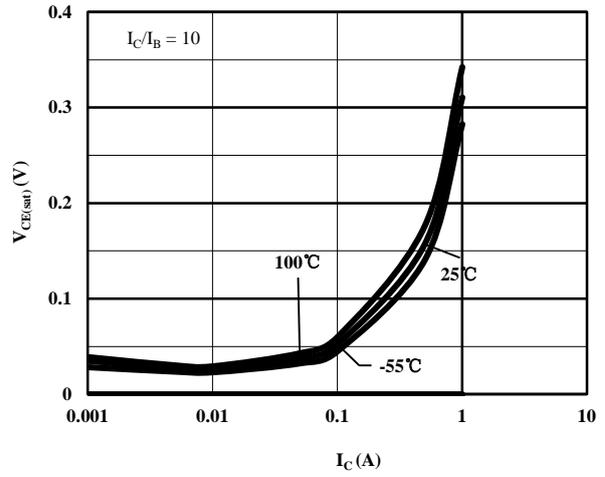


Fig. 2 Base-emitter Saturation Voltage vs. Collector Current

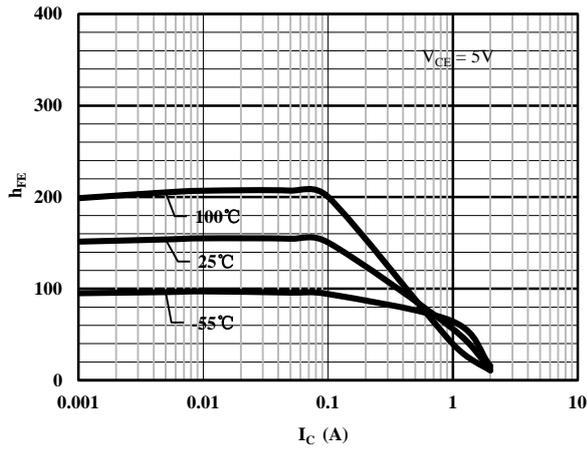


Fig. 3 DC Current Gain vs. Collector Current

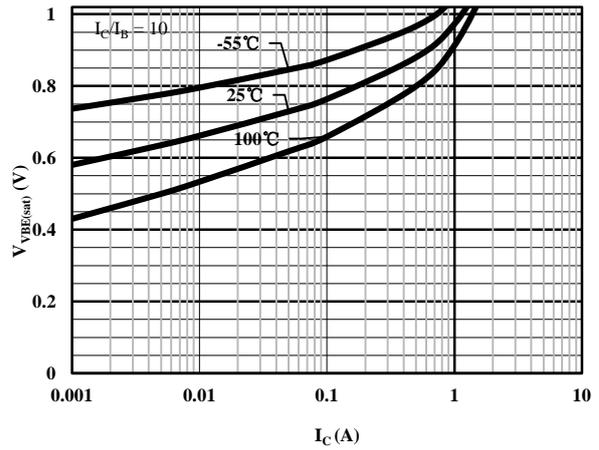


Fig. 4 Collector-Emitter Saturation Voltage vs. Collector Current

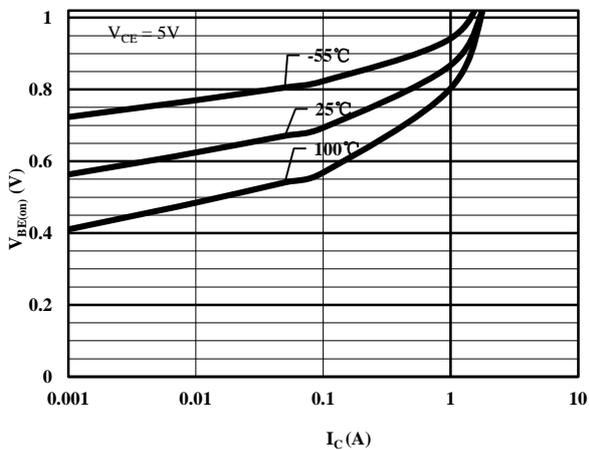


Fig. 5 Base-emitter Voltage vs. Collector Current



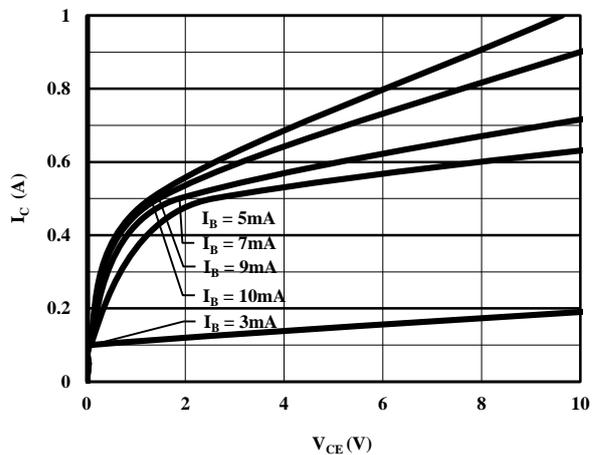


Fig. 6 Output Characteristics

**Package Outline Dimensions** (Unit: mm)

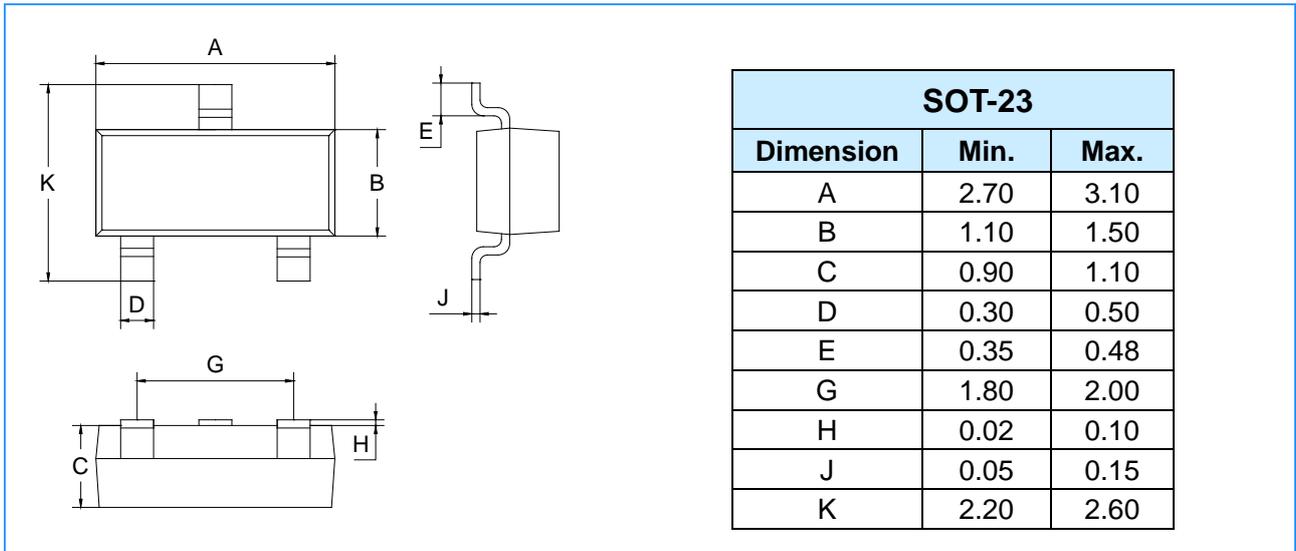

**Package Outline Dimensions** (Unit: mm)

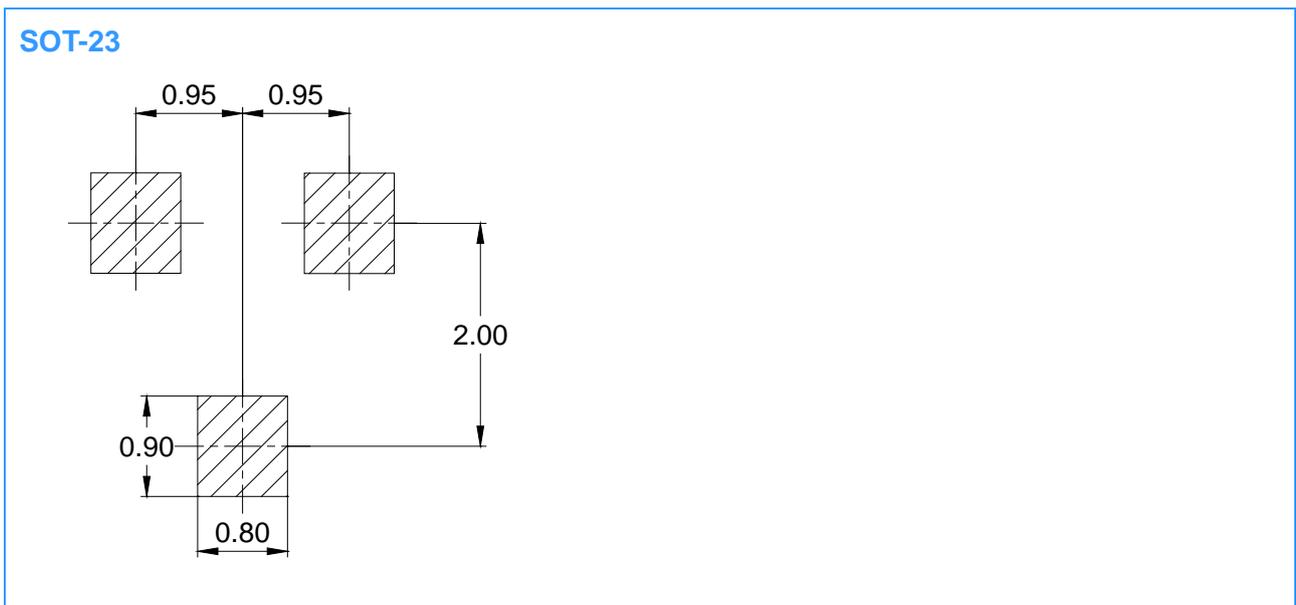

**IMPORTANT NOTICE**

Changzhou Galaxy Century Microelectronics (GME) reserves the right to make changes without further notice to any product information (copyrighted) herein to make corrections, modifications, improvements, or other changes. GME does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others.