



Features


- Switching transistor



Marking and pin assignment



SOT-23 top view



Schematic diagram



Pb-Free



RoHS



Halogen-Free

Maximum Ratings (Ta=25°C unless otherwise noted)







Symbol	Parameter	Value	Unit
V_{CBO}	Collector-Base Voltage	-40	V
V_{CEO}	Collector-Emitter Voltage	-40	V
V_{EBO}	Emitter-Base Voltage	-5	V
I_C	Collector Current	-600	mA
P_C	Collector Power Dissipation	300	mW
$R_{\theta JA}$	Thermal Resistance Junction to Ambient	417	°C/W
T_J, T_{STG}	Operating and Storage Temperature Range	-55~+150	°C



Electrical Characteristics (Ta=25°C unless otherwise specified)

Symbol	Parameter	Test conditions	Min	Typ	Max	Unit
$V_{(BR)CBO}$	Collector-base breakdown voltage	$I_C = -100\mu A, I_E = 0$	-40	--	--	V
$V_{(BR)CEO}$	Collector-emitter breakdown voltage	$I_C = -1mA, I_B = 0$	-40	--	--	V
$V_{(BR)EBO}$	Emitter-base breakdown voltage	$I_E = -100\mu A, I_C = 0$	-5	--	--	V
I_{CBO}	Collector cut-off current	$V_{CB} = -35V, I_E = 0$	--	--	-0.1	nA
I_{EBO}	Emitter cut-off current	$V_{EB} = -4V, I_C = 0$	--	--	-0.1	nA
I_{CEX}	Collector cut-off current	$V_{CE} = -35V, V_{BE} = -0.4V$	--	--	-0.1	nA
h_{FE1}	DC current gain	$V_{CE} = -1V, I_C = -0.1mA$	30	--	--	
h_{FE2}		$V_{CE} = -1V, I_C = -1mA$	60	--	--	
h_{FE3}		$V_{CE} = -1V, I_C = 10mA$	100	--	--	
h_{FE4}		$V_{CE} = -2V, I_C = -150\mu A$	100	--	300	
h_{FE5}		$V_{CE} = -2V, I_C = -500mA$	20	--	--	
$V_{CE(sat)}$	Collector-emitter saturation voltage	$I_C = -150mA, I_B = -15mA$	--	--	-0.4	V
$V_{CE(sat)}$		$I_C = -500mA, I_B = -50mA$	--	--	-220	
$V_{BE(sat)}$	Base-emitter saturation voltage	$I_C = -150mA, I_B = -15mA$	--	--	-0.95	V
$V_{BE(sat)}$		$I_C = -500mA, I_B = -50mA$	--	--	-1.3	V
f_T	Transition frequency	$V_{CE} = -10V, I_C = -20mA, f = 100MHz$	200	--	--	MHz
t_d	Transition frequency	$V_{CC} = -30V, V_{BE(off)} = -0.5V,$	--	--	15	ns
t_r	Rise time	$I_C = -150mA, I_{B1} = -15mA$	--	--	20	ns
t_s	Storage time	$V_{CC} = -30V, I_C = -150mA,$	--	--	225	ns
t_f	Fall time	$I_{B1} = -I_{B2} = 15mA$	--	--	60	ns

 *Pulse test: $t_p \leq 300\mu s, \delta \leq 0.02$.


Typical Operating Characteristics

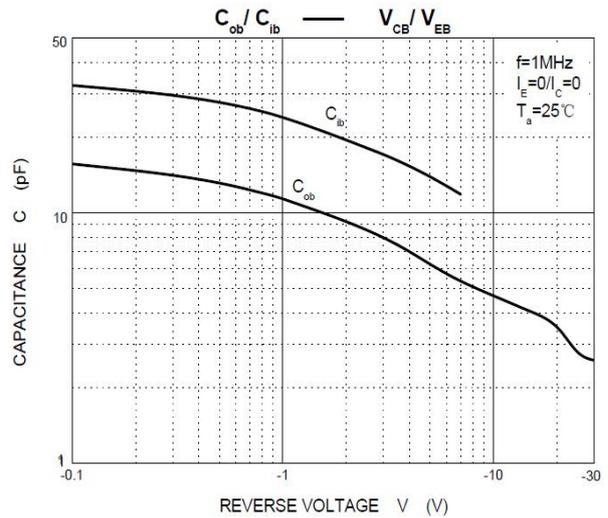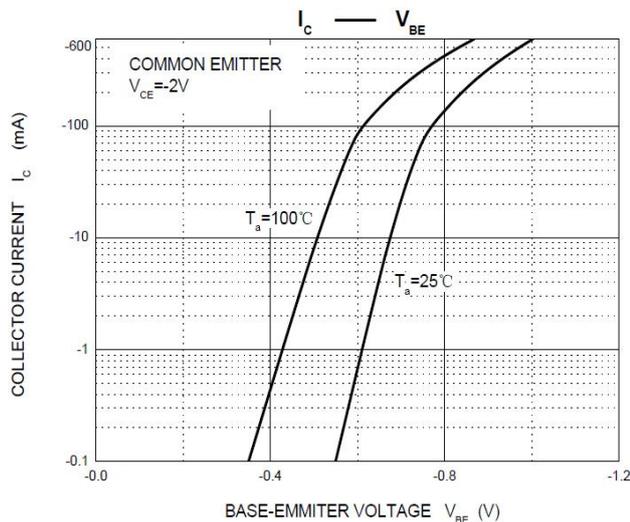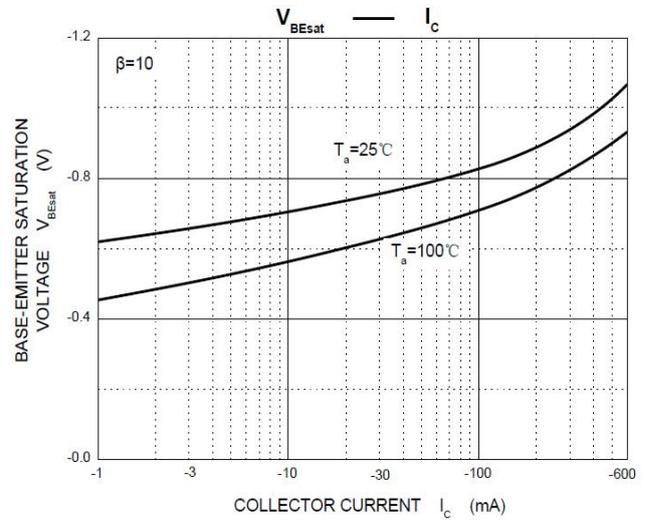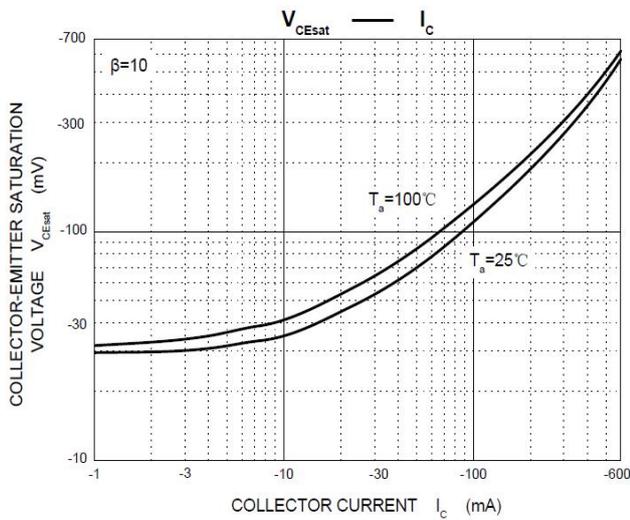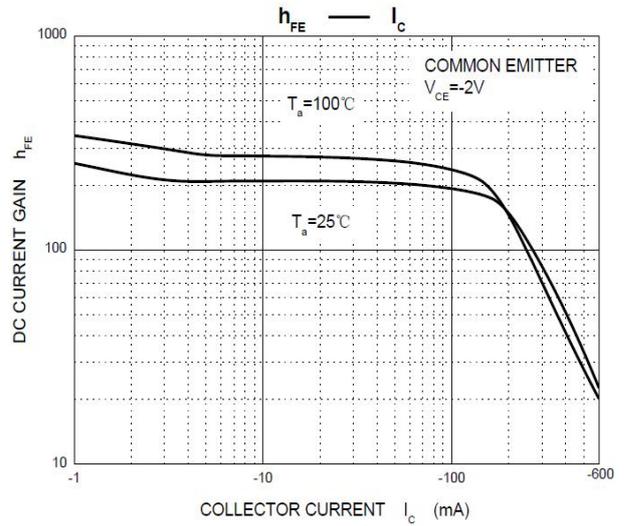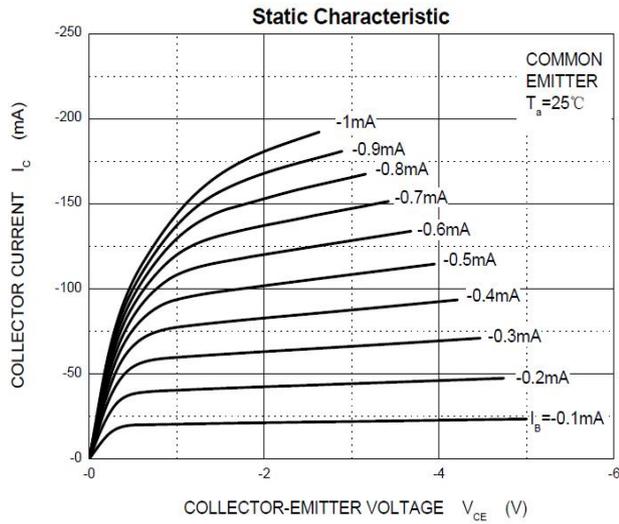

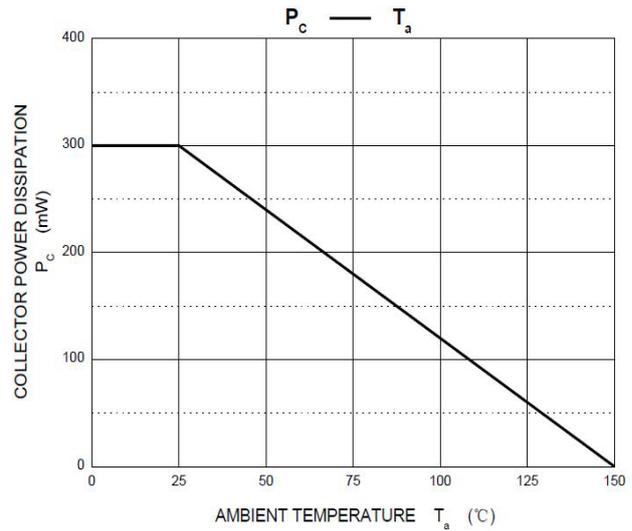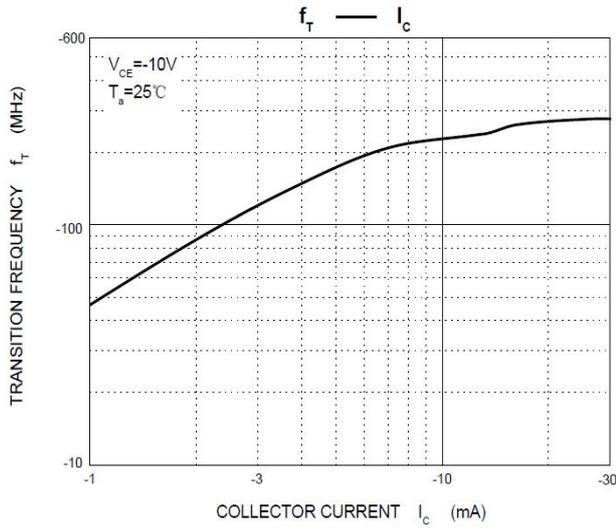

Ordering Information (Example)

Type	Package	Marking	Minimum Package(pcs)	Inner Box Quantity(pcs)	Outer Carton Quantity(pcs)	Delivery Mode
MMBT4403	SOT-23	2T	3,000	45,000	180,000	7"reel

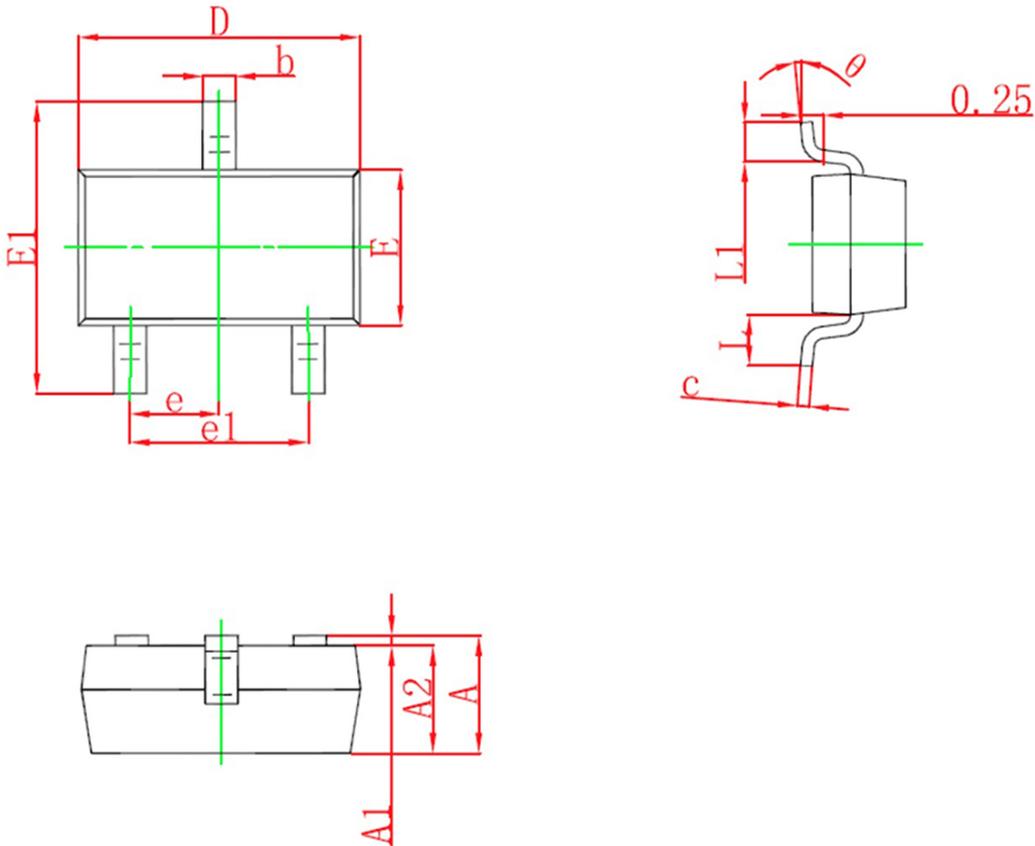SOT-23 Package information


Symbol	Dimensions in Millimeters(mm)		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E1	2.250	2.550	0.088	0.100
E	1.200	1.400	0.047	0.055
e	0.950TYP		0.037TYP	
e1	1.800	2.000	0.071	0.079
L	0.550 REF		0.022 REF	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°