


Silicon Schottky Doide

BAT62-03W

■ Features

- Low Barrier diode for detectors up to GHz frequencies

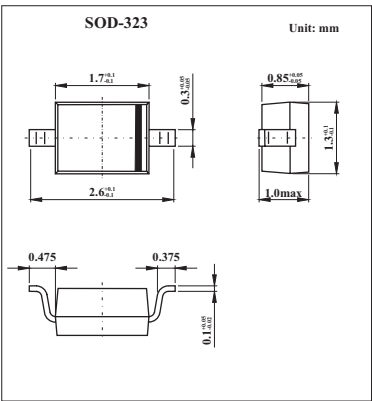

■ Absolute Maximum Ratings Ta = 25℃

Parameter	Symbol	Value	Unit
Diode reverse voltage	V_R	40	V
Forward current	I_F	40	mA
Junction current	T_j	150	℃
Storage temperature	T_{stg}	-55 to +150	℃
Total power dissipation $T_s \leq 85\text{ }^\circ\text{C}$	P_{tot}	100	mW
Junction ambient ⁽¹⁾	R_{thJA}	≤ 650	K/W
Junction-soldering point	R_{thJS}	≤ 810	K/W

Note:

1.Package mounted on an epoxy pcb 15 mm × 16.7mm × 0.7 mm

■ Electrical Characteristics Ta = 25℃

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Breakdown current	I_R	$V_R = 40\text{ V}, T_A = 25\text{ }^\circ\text{C}$			10	μA
Forward voltage	V_F	$I_F = 2\text{ mA}$		0.58	1	V
Diode capacitance	C_T	$V_R = 0; f = 1\text{ MHz}$		0.35	0.6	pF
Case capacitance	C_C	$f = 1\text{ MHz}$		0.1		pF
Differential forward resistance	R_O	$V_R = , f = 10\text{ kHz}$		225		k Ω
Series inductance chip to ground	L_s			2		nH

■ Marking

Marking	L
---------	---