


**1SS184****DIODE****ULTRA HIGH-SPEED
SWITCHING APPLICATIONS****DESCRIPTION**

The UTC **1SS184** is a switching diode, it uses UTC's advanced technology to provide the customers with high reliability and ultra small mold type, etc.

The UTC **1SS184** is suitable for high speed switching applications, etc.

FEATURES



- * High reliability
- * Ultra small mold type
- * Low forward voltage : $V_F @ I_F=100\text{mA} = 0.9\text{V}$ (Typ.)
- * Fast Reverse Recovery Time: $t_{rr}=1.6\text{ns}$ (Typ.)
- * Small Total Capacitance : $C_T=0.9\text{pF}$ (Typ.)

SYMBOL**ORDERING INFORMATION**

Ordering Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
1SS184L-AE3-R	1SS184G-AE3-R	SOT-23	A	A	K	Tape Reel

Note: Pin Assignment: A: Anode K: Cathode

1SS184G-AE3-R 	(1) R: Tape Reel (2) AE3: SOT-23 (3) G: Halogen Free and Lead Free, L: Lead Free
--------------------------	--

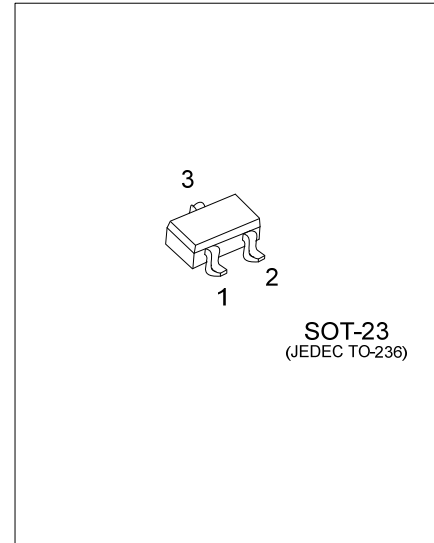MARKING

■ **ABSOLUTE MAXIMUM RATINGS** ($T_A=25^{\circ}\text{C}$, unless otherwise specified)


PARAMETER	SYMBOL	RATINGS	UNIT
Reverse Voltage (Repetitive Peak)	V_{RM}	85	V
Reverse Voltage (DC)	V_R	80	V
Forward Current	I_{FM}	300	mA
Average Rectified Forward Current	I_O	100	mA
Surge Current ($t=1\text{s}$)	I_{surge}	2	mA
Junction Temperature	T_J	+125	$^{\circ}\text{C}$
Storage Temperature	T_{STG}	-55 ~ +150	$^{\circ}\text{C}$

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged.
Absolute maximum ratings are stress ratings only and functional device operation is not implied.


■ **ELECTRICAL CHARACTERISTICS** ($T_A=25^{\circ}\text{C}$, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Reverse Breakdown Voltage	V_R	$I_R=100\mu\text{A}$	80			V
Forward Voltage	V_F	$I_F=1\text{mA}$		0.6		V
		$I_F=10\text{mA}$		0.72		V
		$I_F=100\text{mA}$		0.9	1.2	V
Reverse Current	I_R	$V_R=30\text{V}$			0.1	μA
		$V_R=80\text{V}$			0.5	μA
Capacitance Between Terminals	C_T	$V_R=0\text{V}$, $f=1\text{MHz}$		0.9	3	pF

■ REVERSE RECOVERY TIME (t_{rr}) TEST CIRCUIT


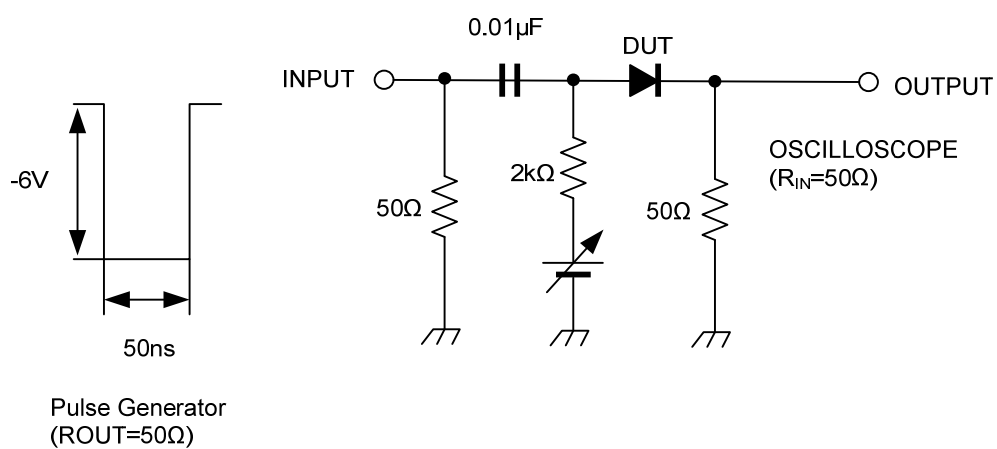


Input Waveform

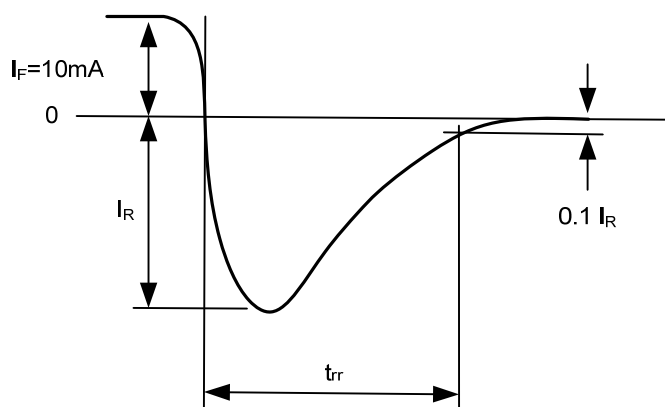

Output Waveform

■ TYPICAL CHARACTERISTICS

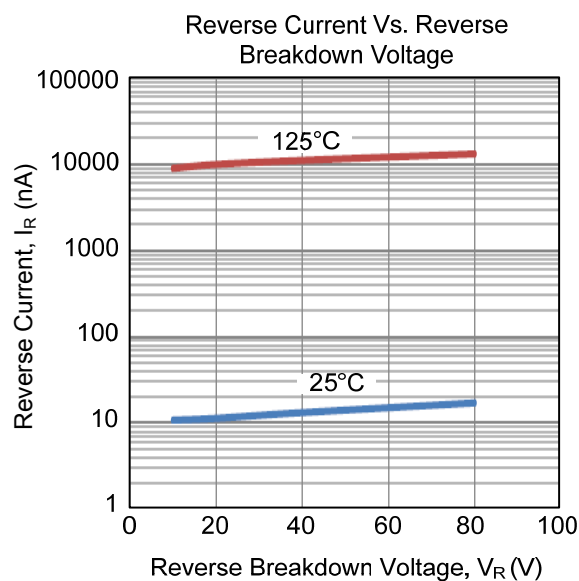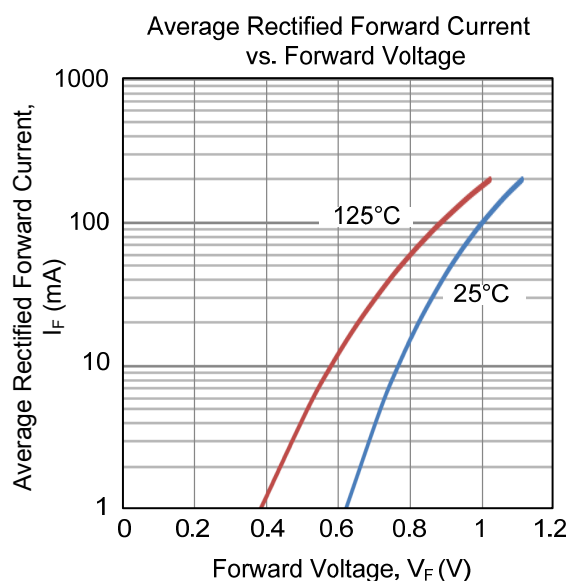

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.