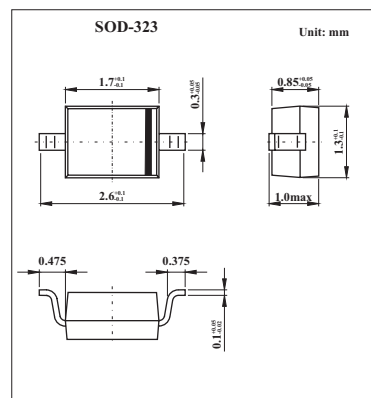


HIGH SPEED SWITCHING APPLICATION

1SS367

■ Features

- Small package: :SC-70
- Low forward voltage : $V_{F(3)} = 0.23 \text{ V(Typ) @ } I_F = 5 \text{ mA}$

■ Absolute Maximum Ratings $T_a = 25^\circ\text{C}$

Parameter	Symbol	Rating	Unit
Maximum (peak) reverse voltage	V_{RM}	15	V
Reverse voltage	V_R	10	V
Maximum (peak) forward current	I_{FM}	200	mA
Average forward current	I_O	100	mA
Surge current (10 ms)	I_{FSM}	1	A
Power dissipation	$P^{(*)}$	200	mW
Junction Temperature	T_j	125	$^\circ\text{C}$
Storage Temperature range	T_{stg}	-55 to +125	$^\circ\text{C}$
Operating temperature range	T_{opr}	-40 to +100	$^\circ\text{C}$

(*) Mounted on a glass epoxy circuit board of 20 * 20 mm, pad dimension of 4 * 4 mm.

■ Electrical Characteristics $T_a = 25^\circ\text{C}$

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Forward voltage	$V_{F(1)}$	$I_F = 1 \text{ mA}$		0.18		V
	$V_{F(2)}$	$I_F = 5 \text{ mA}$		0.23	0.3	
	$V_{F(3)}$	$I_F = 100 \text{ mA}$		0.35	0.5	
Reverse current	I_R	$V_R = 10 \text{ V}$			20	μA
Total capacitance	C_t	$V_R = 0, f = 1.0 \text{ MHz}$		20	40	pF

■ Marking

Marking	S4
---------	----