

MMBD4148A / MMBD4148SE

MMBD4148CC / MMBD4148CA

350mW Surface Mount Switching Diode-100V


Features

- Fast Switching Speed.
- For General Purpose Switching Applications.
- High Conductance.
- Lead-free parts meet RoHS requirements.
- Suffix "-H" indicates Halogen-free part, ex. MMBD4148A-H.

Mechanical data

- Epoxy: UL94-V0 rated flame retardant
- Case : Molded plastic, SOT-23
- Terminals : Solder plated, solderable per MIL-STD-750, Method 2026
- Mounting Position : Any
- Weight : Approximated 0.008 gram

Package Outline

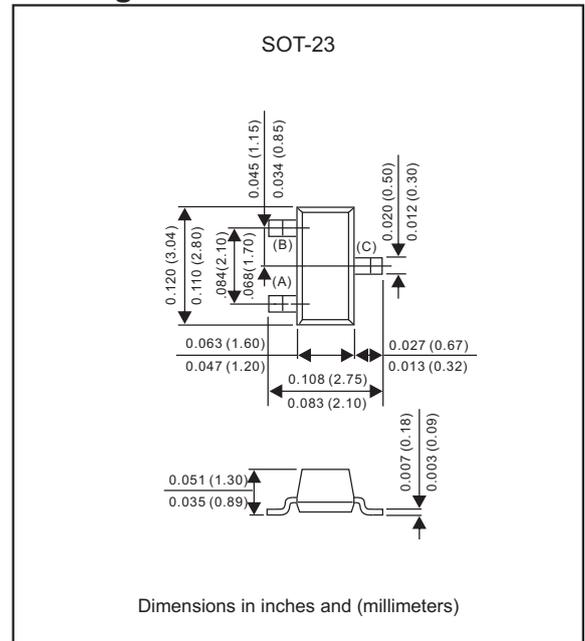

Maximum ratings (AT $T_A=25^\circ\text{C}$ unless otherwise noted)

PARAMETER	SYMBOL	Limit	UNIT
Non-Repetitive Peak Reverse Voltage	V_{RM}	100	V
Peak Repetitive Peak Reverse Voltage	V_{RRM}		
Working Peak Reverse Voltage	V_{RWM}	100	V
DC Blocking Voltage	V_R		
RMS Reverse Voltage	$V_{R(RMS)}$	53	V
Forward Continuous Current	I_{FM}	300	mA
Average Rectified Output Current	I_O	200	mA
Non-Repetitive Peak Forward Surge Current @ $t=1.0\mu\text{s}$ @ $t=1.0\text{s}$	I_{FSM}	2.0 1.0	A

Thermal Characteristics






PARAMETER	SYMBOL	Limit	UNIT
Total Device Dissipation FR-5 Board* ¹ , $T_A = 25^\circ\text{C}$	P_D	350	mW
Thermal Resistance Junction to Ambient	$R_{\theta JA}$	357	$^\circ\text{C}/\text{W}$
Operating Junction Temperature Range	T_J	-55 ~ +150	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-55 ~ +150	$^\circ\text{C}$

1. FR-5 = 1.0 x 0.75 x 0.062 in.

Electrical Characteristics (AT $T_A=25^\circ\text{C}$ unless otherwise noted)









PARAMETER	SYMBOL	MIN.	MAX.	UNIT
Reverse Breakdown Voltage at $I_R=5\mu\text{A}$ Reverse Breakdown Voltage at $I_R=100\mu\text{A}$	V_{BR}	75 100		V
Reverse Leakage Current at $V_R = 75\text{V}$, $T_J = 25^\circ\text{C}$ Reverse Leakage Current at $V_R = 25\text{V}$, $T_J = 25^\circ\text{C}$	I_R		5 0.025	μA
Capacitance between terminals at $V_R = 0\text{V}$, $f = 1.0\text{MHz}$	C_T		4	pF
Reverse Recovery Time at $I_F=I_R=10\text{mA}$, $V_R=6\text{V}$, $I_{tr}=0.1X I_R$, $R_L=100\Omega$	t_{rr}		4	ns
Forward Voltage at $I_F = 10\text{mA}$	V_F		1	V

Rating and characteristic curves (MMBD4148A/SE/CC/CA)

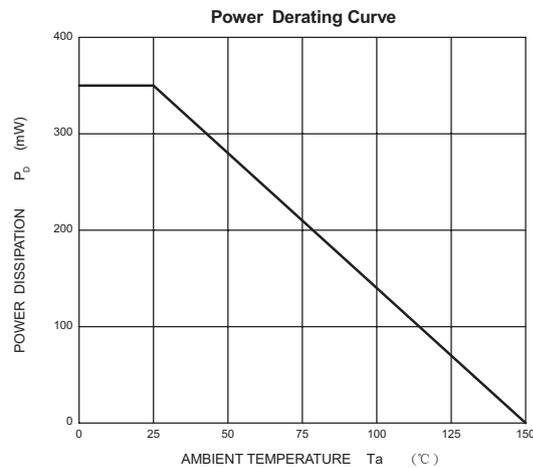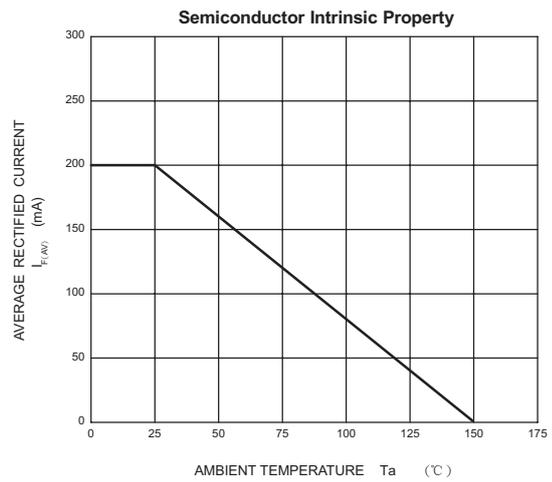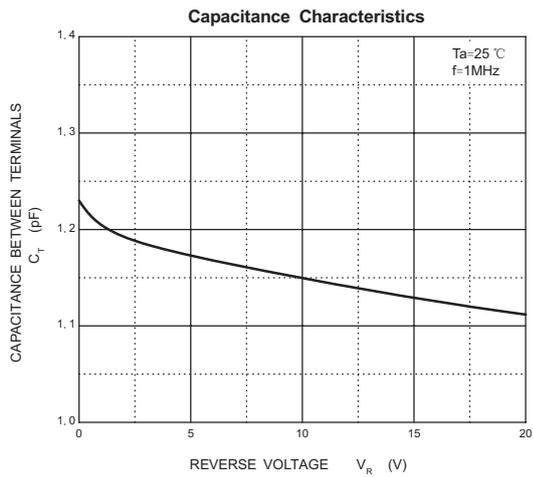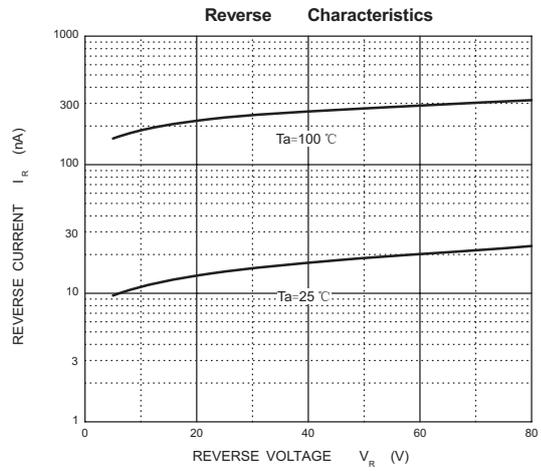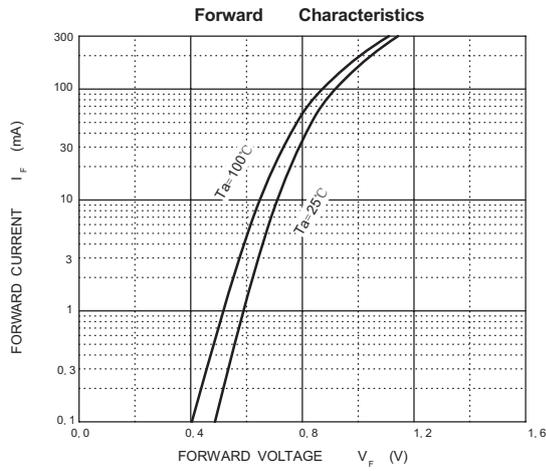


MMBD4148A / MMBD4148SE MMBD4148CC / MMBD4148CA

Pinning information

Type number	Marking code	Simplified outline	Symbol
MMBD4148A	5H		
MMBD4148SE	D4		
MMBD4148CC	D5		
MMBD4148CA	D6		

Suggested solder pad layout


SOT-23

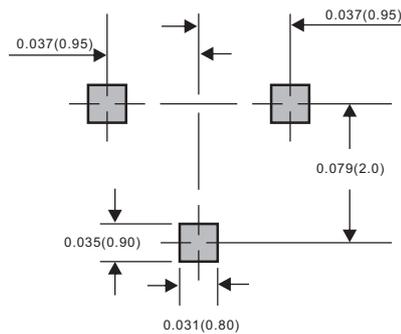

Dimensions in inches and (millimeters)

MMBD4148A / MMBD4148SE
MMBD4148CC / MMBD4148CA

Packing information

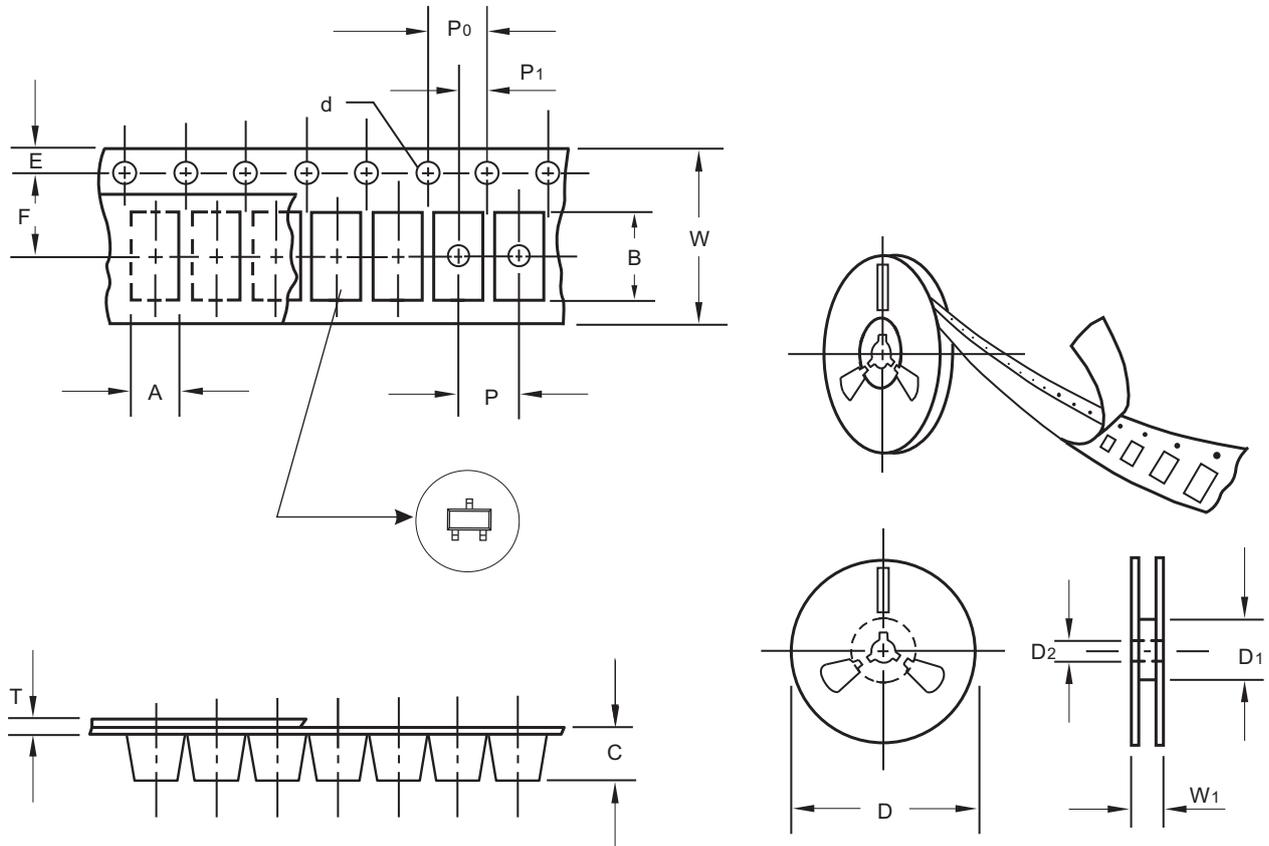

unit:mm

Item	Symbol	Tolerance	SOT-23
Carrier width	A	0.1	3.15
Carrier length	B	0.1	2.77
Carrier depth	C	0.1	1.22
Sprocket hole	d	0.1	1.50
13" Reel outside diameter	D	2.0	-
13" Reel inner diameter	D1	min	-
7" Reel outside diameter	D	2.0	178.00
7" Reel inner diameter	D1	min	62.00
Feed hole diameter	D2	0.5	13.00
Sprocket hole position	E	0.1	1.75
Punch hole position	F	0.1	3.50
Punch hole pitch	P	0.1	4.00
Sprocket hole pitch	P0	0.1	4.00
Embossment center	P1	0.1	2.00
Overall tape thickness	T	0.1	0.23
Tape width	W	0.3	8.00
Reel width	W1	1.0	11.40

Note: Devices are packed in accordance with EIA standard RS-481-A and specifications listed above.


MMBD4148A / MMBD4148SE MMBD4148CC / MMBD4148CA

Reel packing

PACKAGE	REEL SIZE	REEL (pcs)	COMPONENT SPACING (m/m)	BOX (pcs)	INNER BOX (m/m)	REEL DIA, (m/m)	CARTON SIZE (m/m)	CARTON (pcs)	APPROX. GROSS WEIGHT (kg)
SOT-23	7"	3,000	4.0	30,000	183*183*123	178	382*262*387	240,000	11.6

Suggested thermal profiles for soldering processes

- 1.Storage environment: Temperature=5°C~40°C Humidity=55%±25%
- 2.Reflow soldering of surface-mount devices

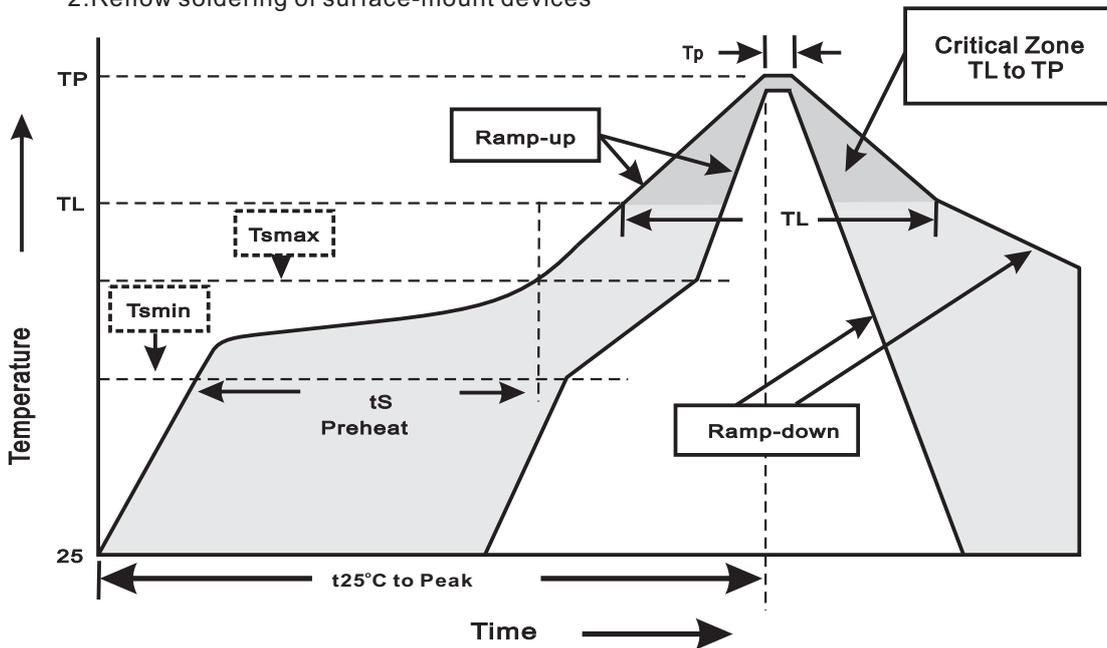

3.Reflow soldering

Profile Feature	Soldering Condition
Average ramp-up rate(TL to TP)	<3°C/sec
Preheat -Temperature Min(Tsmin) -Temperature Max(Tsmax) -Time(min to max)(ts)	150°C 200°C 60~120sec
Tsmax to TL -Ramp-upRate	<3°C/sec
Time maintained above: -Temperature(TL) -Time(tL)	217°C 60~260sec
Peak Temperature(TP)	255°C-0/+5°C
Time within 5°C of actual Peak Temperature(tp)	10~30sec
Ramp-down Rate	<6°C/sec
Time 25°C to Peak Temperature	<6minutes

MMBD4148A / MMBD4148SE

MMBD4148CC / MMBD4148CA

High reliability test capabilities

Item Test	Conditions	Reference
1. Solder Resistance	at $260\pm 5^{\circ}\text{C}$ for $10\pm 2\text{sec}$. immerse body into solder $1/16''\pm 1/32''$	MIL-STD-750D METHOD-2031
2. Solderability	at $245\pm 5^{\circ}\text{C}$ for 5 sec.	MIL-STD-202F METHOD-208
3. High Temperature Reverse Bias	$V_R=80\%$ rate at $T_J=150^{\circ}\text{C}$ for 168 hrs.	MIL-STD-750D METHOD-1038
4. Forward Operation Life	Rated average rectifier current at $T_A=25^{\circ}\text{C}$ for 500hrs.	MIL-STD-750D METHOD-1027
5. Intermittent Operation Life	$T_A = 25^{\circ}\text{C}$, $I_F = I_O$ On state: power on for 5 min. off state: power off for 5 min. on and off for 500 cycles.	MIL-STD-750D METHOD-1036
6. Pressure Cooker	$15P_{SIE}$ at $T_A=121^{\circ}\text{C}$ for 4 hrs.	JESD22-A102
7. Temperature Cycling	-55°C to $+125^{\circ}\text{C}$ dwelled for 30 min. and transferred for 5min. total 10 cycles.	MIL-STD-750D METHOD-1051
8. Forward Surge	Peak forward surge current	MIL-STD-750D METHOD-4066-2
9. Humidity	at $T_A=85^{\circ}\text{C}$, RH=85% for 1000hrs.	MIL-STD-750D METHOD-1021
10. High Temperature Storage Life	at 175°C for 1000 hrs.	MIL-STD-750D METHOD-1031