



**SILERGY**

# SYS14L02DHC

## Low Capacitance ESD/Surge Protection for Gigabit Ethernet Interfaces

### General Description

SYS14L02DHC is a low-capacitance Transient Voltage Suppressor (TVS) array designed to provide electrostatic discharge (ESD) protection for high-speed data interfaces. With typical capacitance of 3.0pF only, SYS14L02DHC is designed to protect parasitic-sensitive systems against over-voltage and over-current transient events. It complies with IEC 61000-4-2 (ESD) ( $\pm 30\text{kV}$  air,  $\pm 30\text{kV}$  contact discharge), IEC 61000-4-4 (electrical fast transient - EFT) (40A, 5/50 ns), IEC 61000-4-5 (Surge) (40A, 8/20 $\mu\text{s}$ ), very fast charged device model (CDM) ESD and cable discharge event (CDE), etc.

SYS14L02DHC is in a DFN3.0x2.0-10L package. Each SYS14L02DHC device can protect two high-speed line pairs. The “flow-thru” design minimizes trace inductance and reduces voltage overshoot associated with ESD events. The combined features of low capacitance and high ESD robustness make SYS14L02DHC ideal for high-speed data port and high-frequency line (e.g., Gigabit Ethernet Ports) applications. The low clamping voltage of the SYS14L02DHC guarantees a minimum stress on the protected IC.

### Ordering Information

Part Number	Working Voltage	Quantity Per Reel	Reel Size
SYS14L02DHC	2.5V	3,000	7 Inch

### Features

- Transient protection for high-speed data lines
  - ◆ IEC 61000-4-2 (ESD)  $\pm 30\text{kV}$  (Air)  $\pm 30\text{kV}$  (Contact)
  - ◆ IEC 61000-4-4 (EFT) 40A (5/50 ns)
  - ◆ IEC 61000-4-5 (Surge) 40A (8/20 $\mu\text{s}$ )
- Package optimized for high-speed lines
- Provides protection for two line pairs
- Low capacitance: 3.0pF @ 0V (Typical)
- Low leakage current: 0.1 $\mu\text{A}$  @  $V_{\text{RWM}}$  (Typical)
- Low operating and clamping voltage
- Each I/O pin can withstand over 1000 ESD strikes for  $\pm 8\text{kV}$  contact discharge


### Mechanical Characteristics

- DFN3.0x2.0-10L package
- Flammability Rating: UL 94V-0
- Marking: Part number, Date
- Packaging: Tape and Reel


### Applications

- 10/100/1000M Ethernet Ports
- WAN/LAN Equipment
- Desktops, Servers and Notebooks
- Cellular Phones
- Switching Systems
- Audio/Video Inputs

## Circuit Diagram

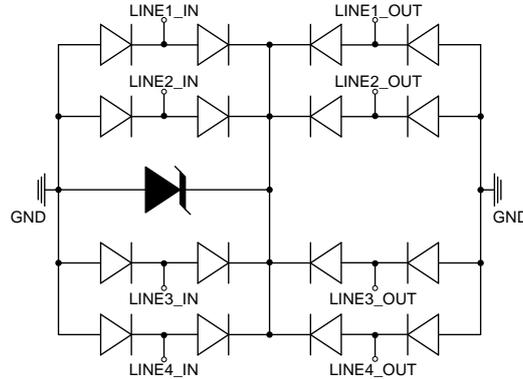

## Pin Configuration (Top View)

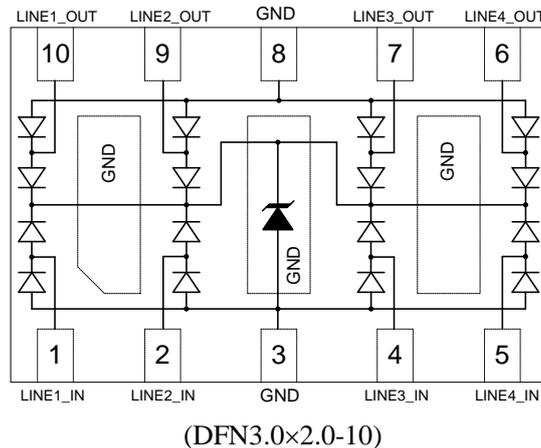

## Absolute Maximum Rating


Symbol	Parameter	Value	Units
$I_{PP}$	Peak Pulse Current (8/20 $\mu$ s) <sup>1</sup>	40	A
$P_{PK}$	Peak Pulse Power (8/20 $\mu$ s) <sup>1</sup>	1000	Watts
$V_{ESD}$	ESD per IEC 61000-4-2 (Air) ESD per IEC 61000-4-2 (Contact)	$\pm 30$ $\pm 30$	kV
$T_{OPT}$	Operating Temperature	-55 to +125	$^{\circ}$ C
$T_{STG}$	Storage Temperature	-55 to +150	$^{\circ}$ C

Notes:

- 1) Ratings with 2 pins connected together per the recommended configuration (ie pin 1 connected to pin 10, pin 2 connected to pin 9, pin 4 connected to pin 7, and pin 5 connected to pin 6).

## Electrical Characteristics (T = 25°C)


Symbol	Parameter
$V_{RWM}$	Nominal Reverse Working Voltage
$I_R$	Reverse Leakage Current @ $V_{RWM}$
$V_{t1}$	Trigger Voltage
$I_{t1}$	Trigger Current @ $V_{t1}$
$V_h$	Holding Voltage
$I_h$	Holding Current @ $V_h$
$V_C$	Clamping Voltage @ $I_{PP}$
$I_{PP}$	Maximum Peak Pulse Current
$C_{ESD}$	Parasitic Capacitance

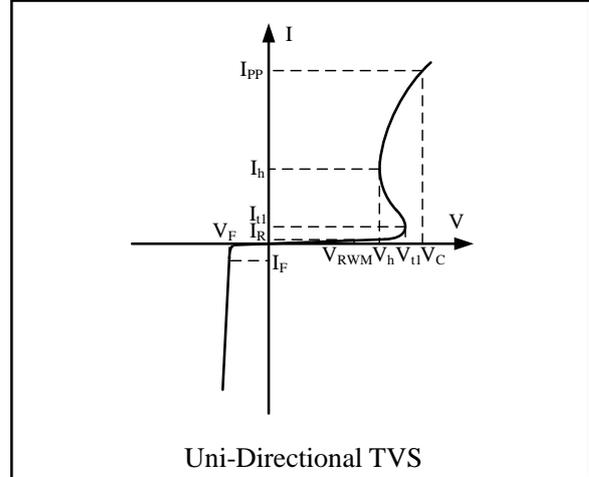


Symbol	Test Condition	Minimum	Typical	Maximum	Units
$V_{RWM}$				2.5	V
$I_R$	$V_{RWM} = 2.5V, T = 25^\circ C$		0.1	1.0	$\mu A$
$V_{t1}$	$I_{t1} = 1\mu A$	3.0	3.7	4.5	V
$V_h$	$I_h = 1mA$	3.0		4.0	V
$V_C$	Any I/O to Ground $I_{PP} = 1A, t_p = 8/20\mu s$			4.5	V
$V_C$	Any I/O to Ground $I_{PP} = 10A, t_p = 8/20\mu s$			7.5	V
$V_C$	Any I/O to Ground $I_{PP} = 25A, t_p = 8/20\mu s$			12.0	V
$V_C$	Line-to-Line / Line-to-GND, two I/O Pins connected together on each line $I_{PP} = 40A, t_p = 8/20\mu s$			20.0	V
$C_{ESD}$	Between I/O Pins and Ground $V_R = 0V, f = 1MHz$		3.0	4.0	pF
$C_{ESD}$	Between I/O Pins $V_R = 0V, f = 1MHz$		1.5	2.0	pF

## Typical Performance Characteristics


**Clamping Voltage  $V_C$  vs. Current  $I_{PP}$**   
Any I/O to GND

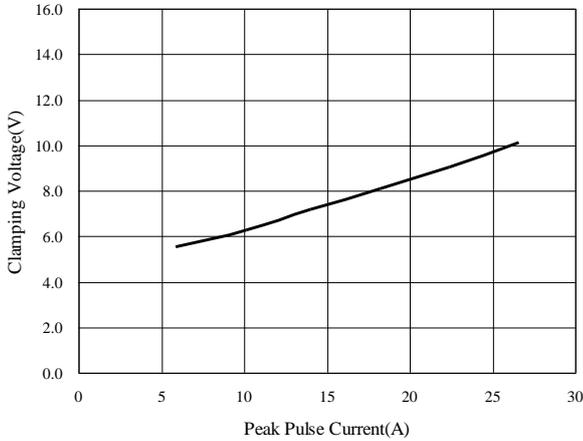


**Clamping Voltage  $V_C$  vs. Current  $I_{PP}$**   
Line-to-Line, Two I/O Pins Connected Together

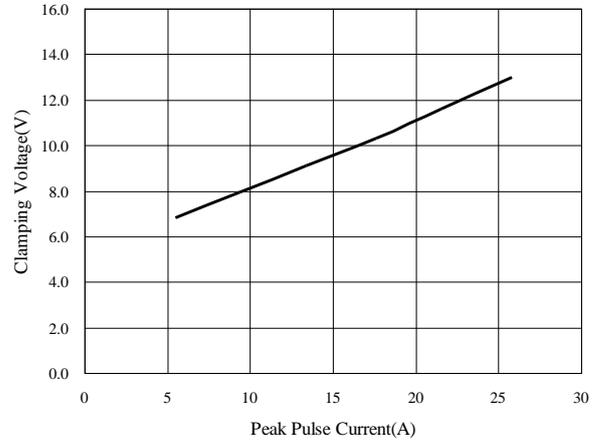


**Insertion Loss S21 (I/O to GND)**

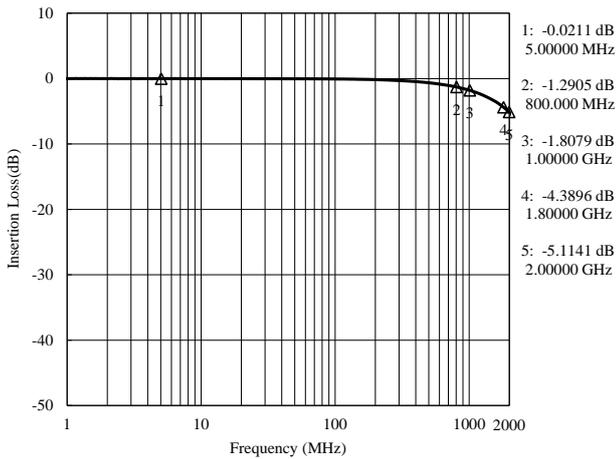


**Normalized Capacitance vs. Voltage**

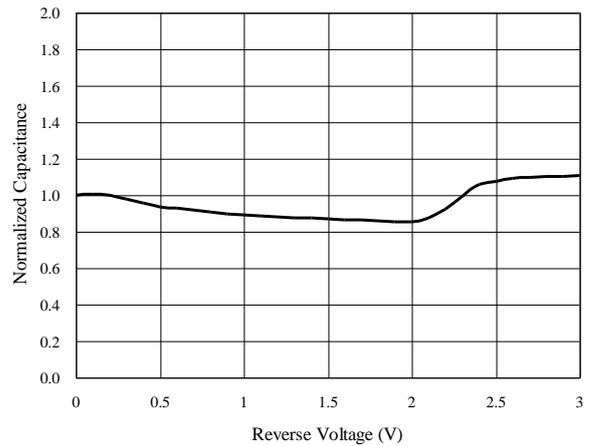

**ESD Clamping of I/O to GND**  
(+8kV Contact per IEC 61000-4-2)

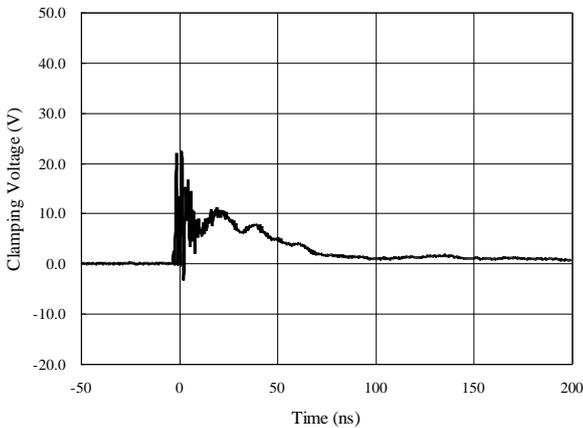


**ESD Clamping of I/O to GND**  
(-8kV Contact per IEC 61000-4-2)

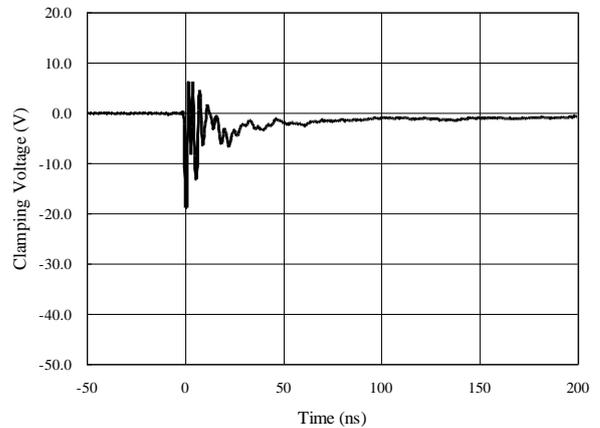

## Application Information

Electronic equipment is susceptible to damage caused by a variety of sources, including Electrostatic Discharge (ESD), Electrical Fast Transients (EFT) and Lightning strikes. The SYS14L02DHC was designed to protect the sensitive equipment from damage which may be induced by such transient events. This product can be configured in different connections to meet the requirement of common-mode and differential-mode as follows:

## Gigabit Ethernet Protection

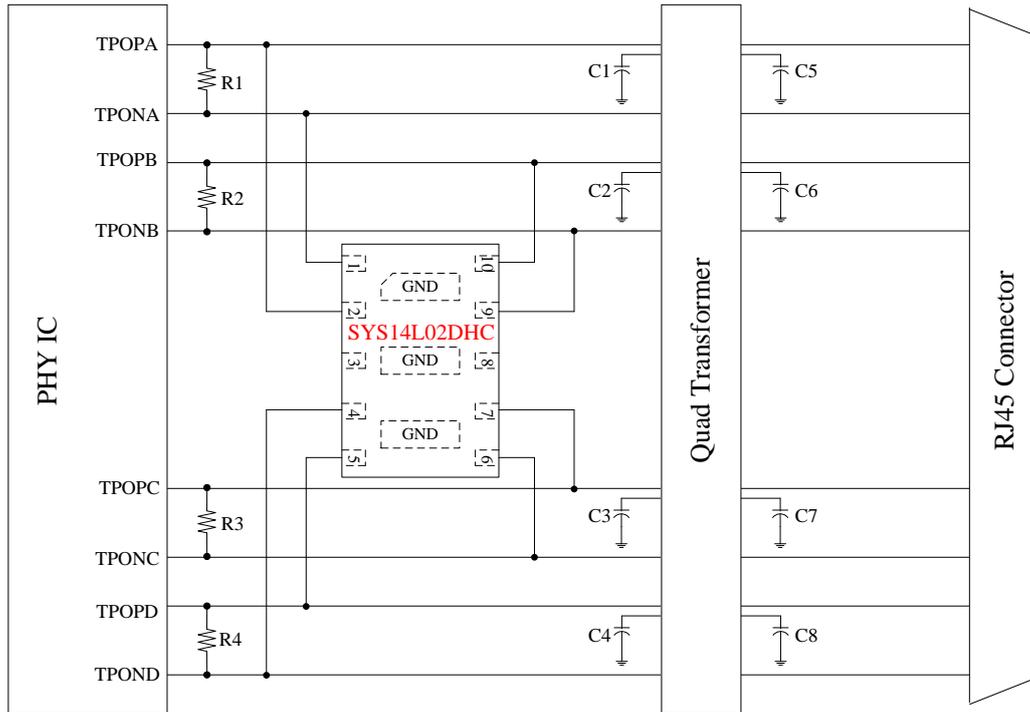


Schematic Diagram for Gigabit Ethernet ESD/ Surge Protection using SYS14L02DHC

**NOTE:**

Please connect pin3, Pin8 and all GND Tabs of SYS14L02DHC to the ground plane of the systems.

## Gigabit Ethernet Protection (Cont.)

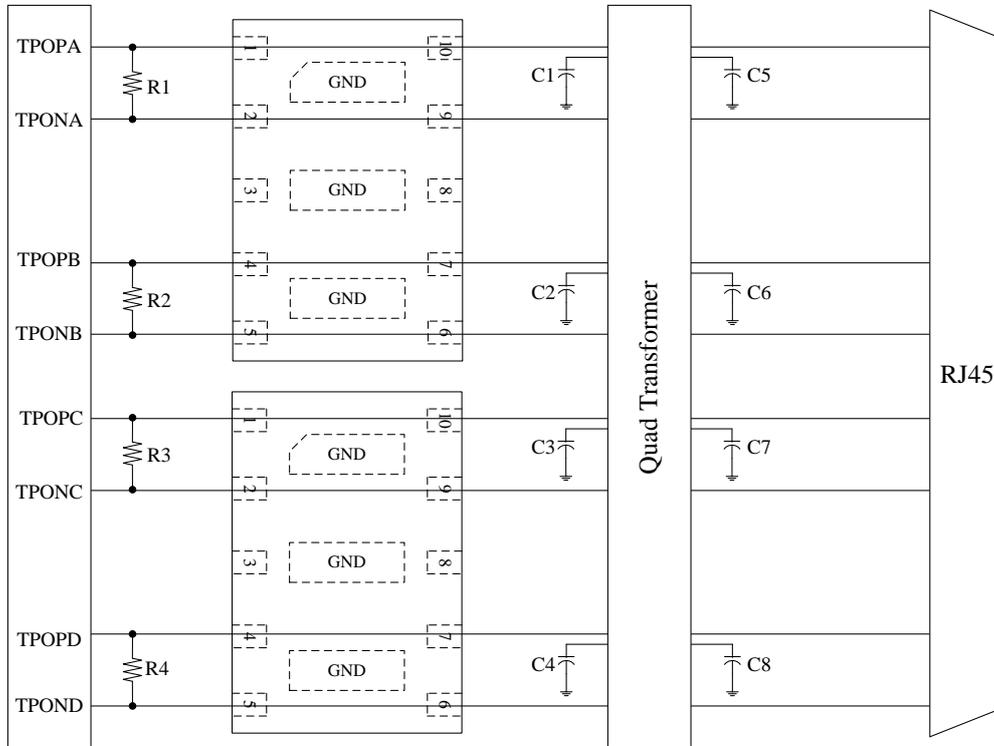


Schematic Diagram for Gigabit Ethernet ESD/Surge Protection using SYS14L02DHC

**NOTE:**

Please connect pin3, Pin8 and all GND Tabs of SYS14L02DHC to the ground plane of the systems.

## Package Outline


- DFN3.0x2.0-10L package

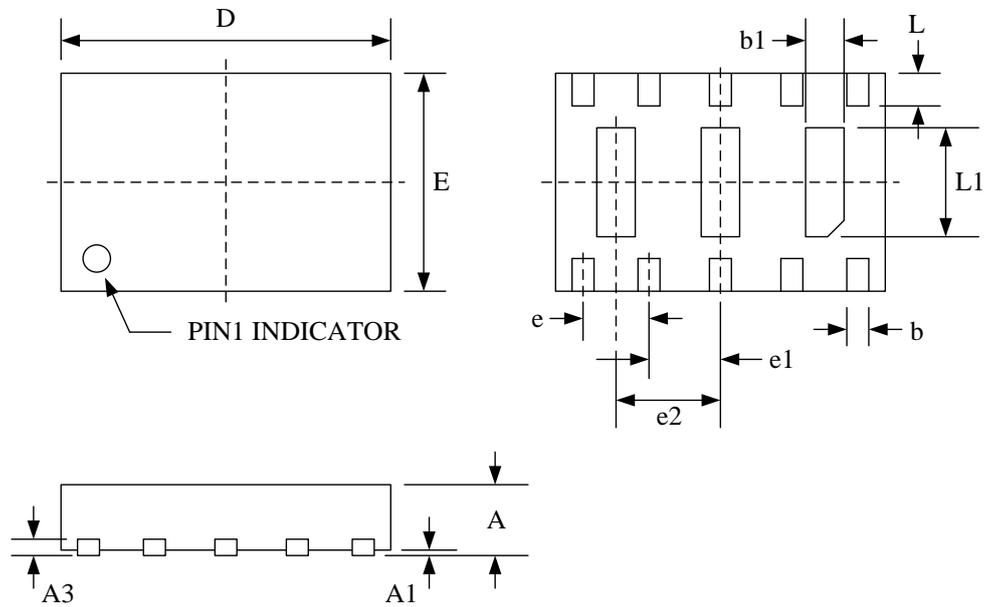


Package Dimensions (Controlling dimensions are in millimeters)

Symbol	Dimensions (mm)			Dimensions (Inches)		
	Minimum	Typical	Maximum	Minimum	Typical	Maximum
A	0.500	0.600	0.650	0.020	0.024	0.026
A1	0.000	0.030	0.050	0.000	0.001	0.002
A3	0.15 REF			0.006 REF		
b	0.150	0.200	0.250	0.006	0.008	0.010
b1	0.250	0.350	0.450	0.010	0.014	0.018
D	2.900	3.000	3.100	0.114	0.118	0.122
E	1.900	2.000	2.100	0.075	0.079	0.083
e	0.600 BSC			0.024 BSC		
e1	0.650 BSC			0.026 BSC		
e2	0.950 BSC			0.037		
L	0.250	0.300	0.350	0.010	0.012	0.014
L1	0.950	1.000	1.050	0.037	0.039	0.041

## Tape and Reel Specification

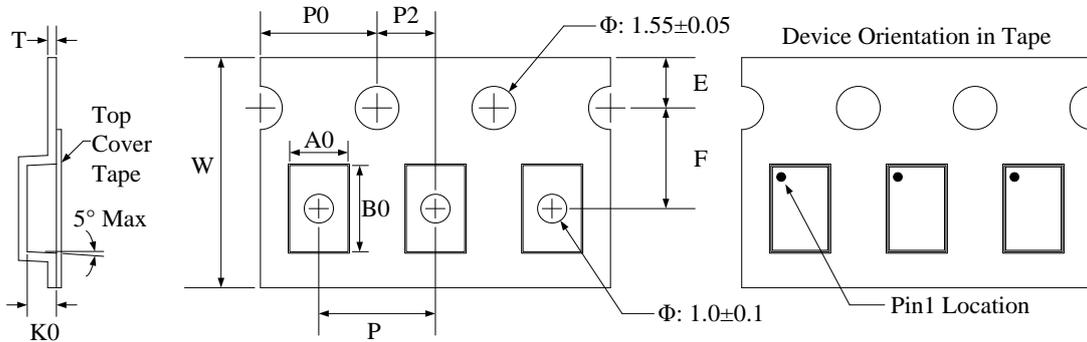


Symbol	W	A0	B0	K0	E	F	P	P0	P2	T
Dimensions (mm)	8.00+0.3 -0.1	2.3±0.1	3.2±0.1	1.0±0.1	1.75±0.1	3.5±0.05	4.0±0.1	4.0±0.1	2.0±0.1	0.3±0.05

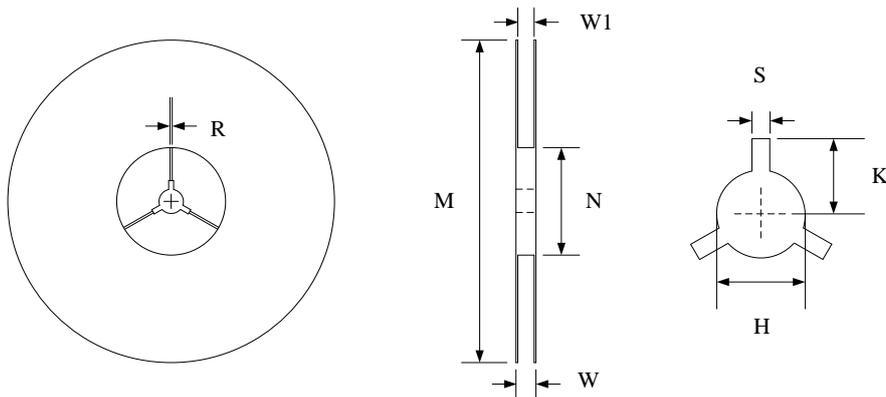

Symbol	Reel Size	M	N	W	W1	H	S	K	R
Dimensions (mm)	Φ178	178.0±1.0	60.0±1.0	11.5±0.5	9.0±0.5	13.0±0.5	2.0±0.1	11.0±0.2	1.0±0.05


## Marking Codes

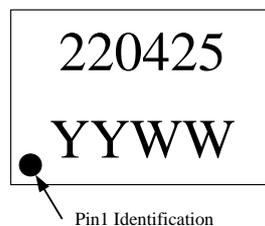

### Note:

- (1) "220425" is the part number, fixed.
- (2) "YYWW" is date code. "YY" is year (2012 is "12"); while "WW" is the assembly week in a year.

## Suggested PCB Layout

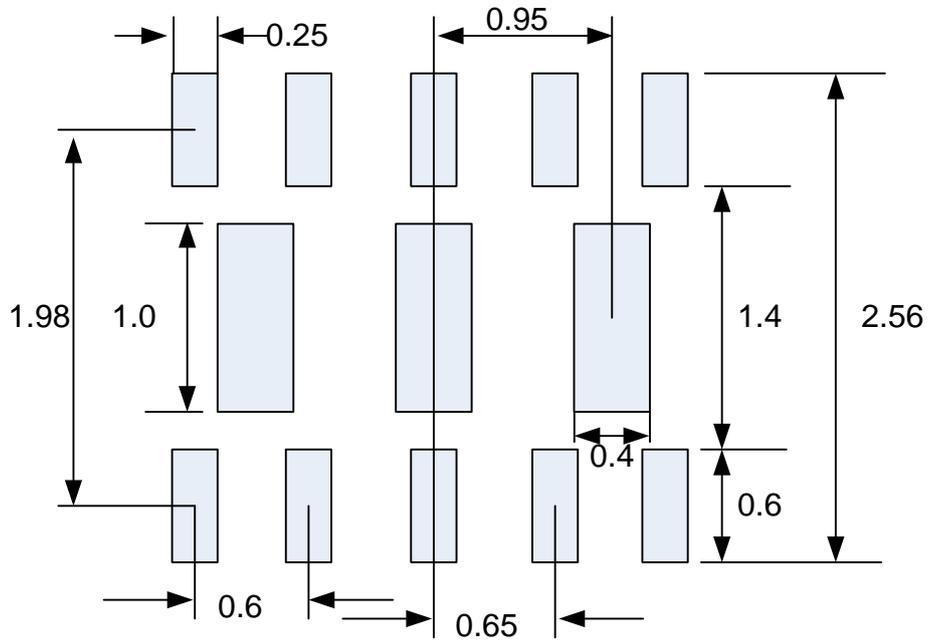

**SYS14L02DHC**



## IMPORTANT NOTICE

1. **Right to make changes.** Silergy and its subsidiaries (hereafter Silergy) reserve the right to change any information published in this document, including but not limited to circuitry, specification and/or product design, manufacturing or descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products are sold subject to Silergy's standard terms and conditions of sale.

2. **Applications.** Application examples that are described herein for any of these products are for illustrative purposes only. Silergy makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification. Buyers are responsible for the design and operation of their applications and products using Silergy products. Silergy or its subsidiaries assume no liability for any application assistance or designs of customer products. It is customer's sole responsibility to determine whether the Silergy product is suitable and fit for the customer's applications and products planned. To minimize the risks associated with customer's products and applications, customer should provide adequate design and operating safeguards. Customer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Silergy assumes no liability related to any default, damage, costs or problem in the customer's applications or products, or the application or use by customer's third-party buyers. Customer will fully indemnify Silergy, its subsidiaries, and their representatives against any damages arising out of the use of any Silergy components in safety-critical applications. It is also buyers' sole responsibility to warrant and guarantee that any intellectual property rights of a third party are not infringed upon when integrating Silergy products into any application. Silergy assumes no responsibility for any said applications or for any use of any circuitry other than circuitry entirely embodied in a Silergy product.

3. **Limited warranty and liability.** Information furnished by Silergy in this document is believed to be accurate and reliable. However, Silergy makes no representation or warranty, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. In no event shall Silergy be liable for any indirect, incidental, punitive, special or consequential damages, including but not limited to lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges, whether or not such damages are based on tort or negligence, warranty, breach of contract or any other legal theory. Notwithstanding any damages that customer might incur for any reason whatsoever, Silergy's aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the Standard Terms and Conditions of Sale of Silergy.

4. **Suitability for use.** Customer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of Silergy components in its applications, notwithstanding any applications-related information or support that may be provided by Silergy. Silergy products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of a Silergy product can reasonably be expected to result in personal injury, death or severe property or environmental damage. Silergy assumes no liability for inclusion and/or use of Silergy products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

5. **Terms and conditions of commercial sale.** Silergy products are sold subject to the standard terms and conditions of commercial sale, as published at <http://www.silergy.com/stdterms>, unless otherwise agreed in a valid written individual agreement specifically agreed to in writing by an authorized officer of Silergy. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. Silergy hereby expressly objects to and denies the application of any customer's general terms and conditions with regard to the purchase of Silergy products by the customer.

6. **No offer to sell or license.** Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights. Silergy makes no representation or warranty that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right. Information published by Silergy regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from Silergy under the patents or other intellectual property of Silergy.

For more information, please visit: [www.silergy.com](http://www.silergy.com)

© 2019 Silergy Corp.

All Rights Reserved.