

Click to
ORDER
samples

AMEM5-Y




The AMEM5-Y high power density AC/DC converters are available in the small 1x1 inch PCB mountable package, boasting the lowest height profile in the 4000VAC isolation range and a large MTBF. The AMEM5-Y series features a 10,000µF Maximum Capacitance load and many protective features such as over load, over voltage and continuous short circuit protection. Additionally, it offers a no-load power consumption below 0.2W and no minimum load is required for operation within the specified range. These new power converters will simplify industrial and commercial product designs, while increasing their affordability.

Features

- I/O Isolation 4000VAC
- Continuous Short circuit protection
- Operating Temp: -25 °C to +70 °C
- No load power consumption below 0.2W
- Input: 85-264VAC, 47-63Hz, or 120-370VDC
- Compact 1x1 inch package
- Over Load, Over Voltage Protection
- Efficiency up to 77%



Summary

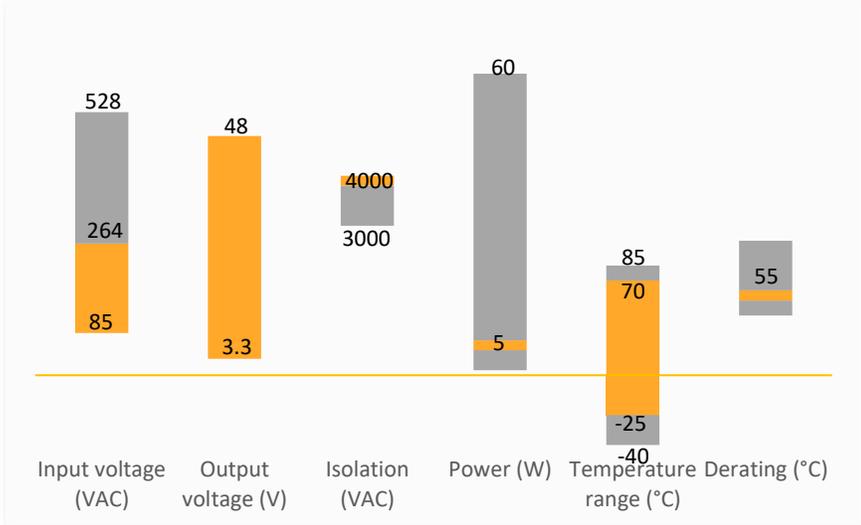

Training

AMEM5-Y
Product Overview



Product Training Video
(click to open)


Press Release

RoHS Soldering profiles



Application Notes

Applications

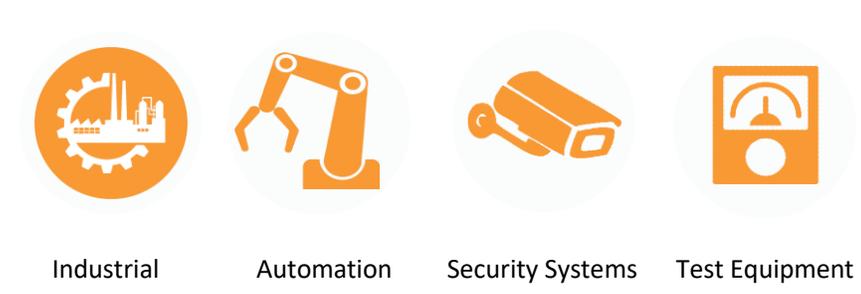

Models & Specifications

Single Output

Model	Input Voltage (VAC/Hz)	Input Voltage (VDC)	Output Voltage (V)	Output Current max (A)	Maximum capacitive Load (230VAC) (μF)	Efficiency 230VAC (%)
AMEM5-3.3SY	85-264/47-63	120-370	3.3	1.51	10000	73.6
AMEM5-5SY	85-264/47-63	120-370	5	1.00	7200	73.6
AMEM5-9SY	85-264/47-63	120-370	9	0.55	2200	77.6
AMEM5-12SY	85-264/47-63	120-370	12	0.41	1000	77.6
AMEM5-15SY	85-264/47-63	120-370	15	0.33	820	77.6
AMEM5-24SY	85-264/47-63	120-370	24	0.20	300	77.5
AMEM5-36SY	85-264/47-63	120-370	36	0.135	120	77.5
AMEM5-48SY	85-264/47-63	120-370	48	0.10	100	77.5

Note: Use suffix -ST" for chassis and suffix "-STD" for DIN-Rail mounting.

Input Specification

Parameters	Conditions	Typical	Maximum	Units
Current (full load)	115 VAC		110	mA
	230 VAC		60	mA
Inrush current <2ms	115 VAC, cold start		30	A
	230 VAC, cold start		60	A
Leakage current	230VAC/50Hz		0.25	mA
External fuse	Slow blow type	1		A
Startup time	115VAC		3	s

Output Specification

Parameters	Conditions	Typical	Maximum	Units
Voltage accuracy		±2		%
Line regulation	Full load, main input range	±1		%
Load regulation	0-100% load	±1		%
Minimum load	Single output	0		A
Ripple & Noise*	3.3,5,9,12V Output		150	mV p-p
	15,24V Output		250	mV p-p
	36V Output		360	mV p-p
	48V Output		480	mV p-p
Hold-up time	115VAC, 20MHz bandwidth	10		ms

* 20MHz bandwidth with a 0.1uF CC and a 10uF EC

General Specifications				
Parameters	Conditions	Typical	Maximum	Units
Switching frequency	Single output		125	KHz
Over Load protection		≥110		% of Iout
Over voltage protection	120-190% rated Vout			
Short circuit protection	Continuous, Auto recovery			
Operating temperature	See derating curve	-25 to +70		°C
Altitude			3000	m
Storage temperature		-40 to +85		°C
Storage altitude			5000	m
Maximum Case temperature			100	°C
Temperature coefficient		±0.05		% / °C
Cooling	Free air convection			
Humidity	Non-condensing		95	% RH
Case material	Plastic (flammability to UL 94V-0)			
Weight	PCB mountable models	18.5		g
	With optional -ST mounting plate	38.5		g
	With optional -STD mounting plate	58.5		g
Dimensions (L x W x H)	PCB mountable models	1.04 x 1.04 x 0.63 inches	26.5 x 26.5 x 16.0 mm	
	With optional -ST mounting plate	2.99 x 1.40 x 0.90 inches	76.0 x 35.5 x 22.8 mm	
	With optional -STD mounting plate	2.99 x 1.40 x 1.26 inches	76.0 x 35.5 x 31.92 mm	
MTBF	> 860,000 hrs (MIL-HDBK -217F, t=+25°C) / Full Load			
NOTE: All specifications in this datasheet are measured at an ambient temperature of 25°C, humidity<75%, nominal input voltage and at rated output load unless otherwise specified.				



Isolation Specifications				
Parameters	Conditions	Typical	Rated	Units
Tested I/O voltage	60 sec, leakage current < 5mA		4000	VAC

Environmental Specifications		
Vibration	Test mode	10-500Hz
	Acceleration	2G, 10min one cycle, every axis tested, 60min total duration


Safety Specifications		
Parameters		
Agency approvals	CE, cULus (except -STD models)	
Standards	Information technology Equipment	IEC/EN/UL 62368-1 (except -STD models)
	EMI - Conducted and radiated emission	EN55032, CISPR 32 class B, FCC Part 15
	Electrostatic Discharge Immunity	IEC 61000-4-2: Contact: 4KV; Air: 8KV
	RF, Electromagnetic Field Immunity	IEC 61000-4-3 Level 2, Criterion A
	Electrical Fast Transient/Burst Immunity	IEC 61000-4-4 Level 2, Criterion A
	Surge Immunity	IEC 61000-4-5: 2KV
	RF, Conducted Disturbance Immunity	IEC 61000-4-6 Level 2, Criterion A
	Power frequency Magnetic Field Immunity	IEC 61000-4-8 Level 1, Criterion A

Voltage dips, Short Interruptions Immunity	IEC 61000-4-11 Level C, Criterion A
Harmonic Current Emission	IEC 61000-3-2
Voltage Fluctuation and Flicker Emission	IEC 61000-3-3

Derating

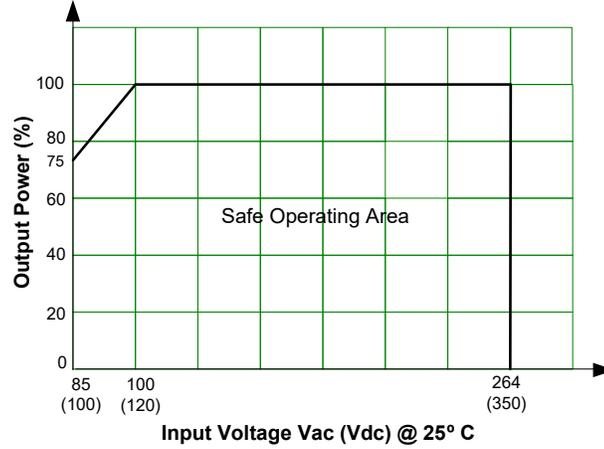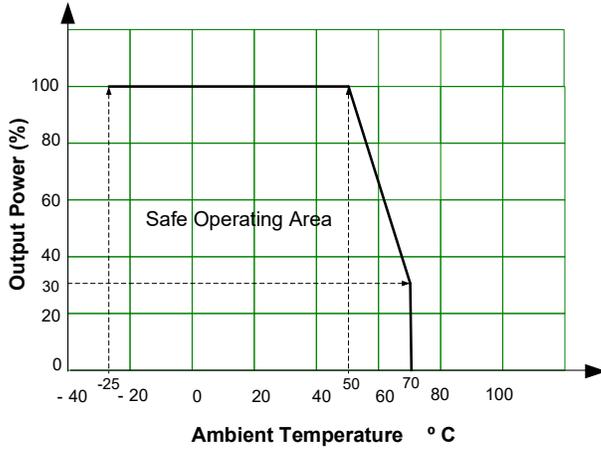


Dimensions

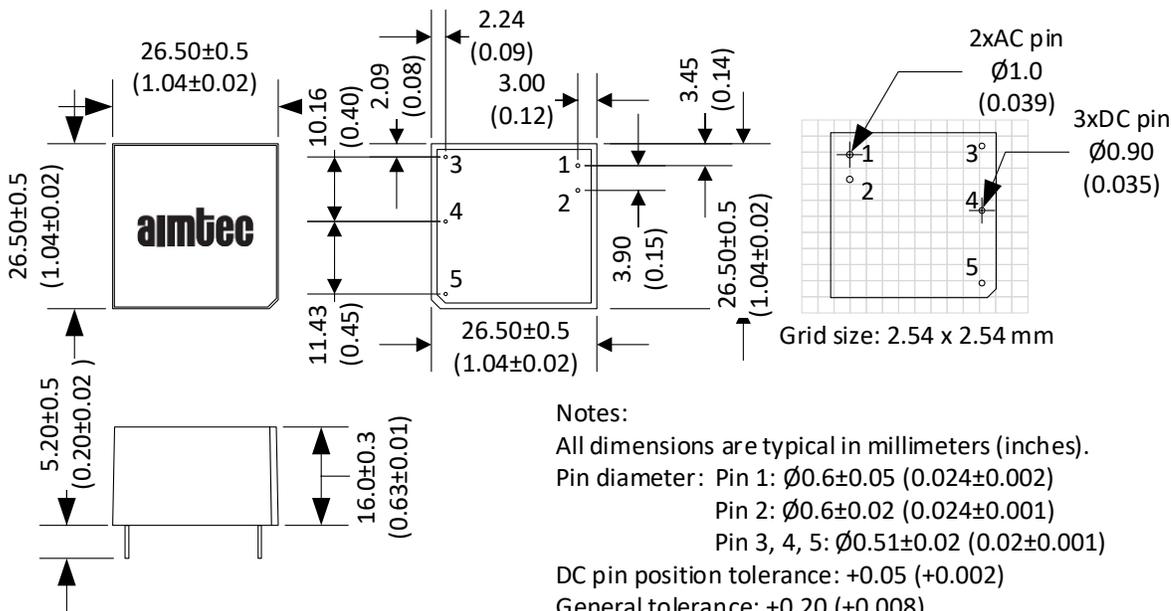

Pin Output Specifications	
Pin	Single
1	AC Input (N)
2	AC Input (L)
3	+V Output
4	-V Output
5	NC

Dimensions with -ST optional

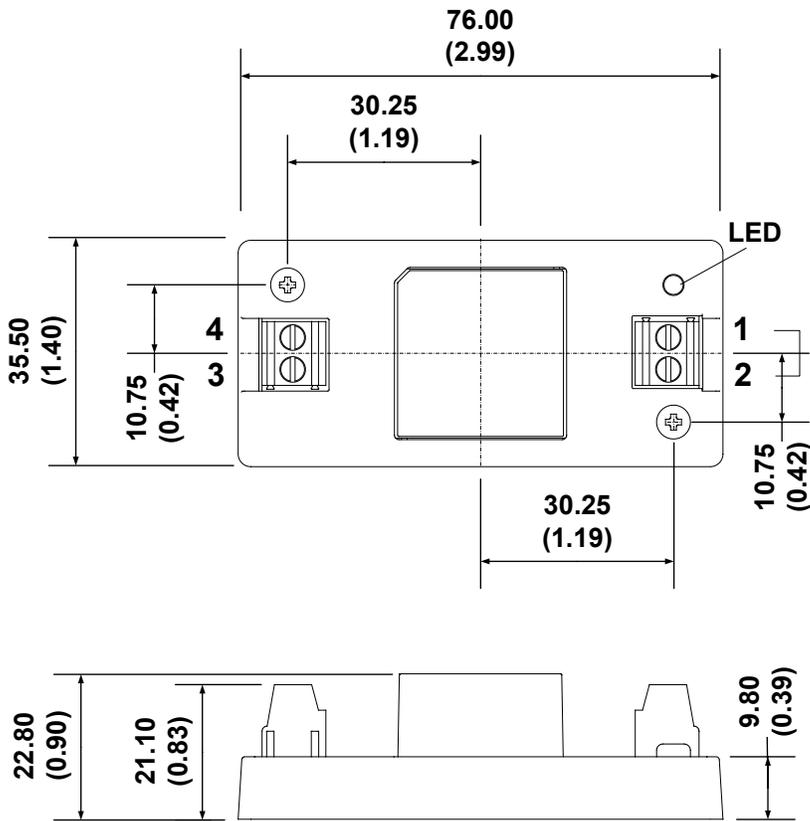

Pin Output Specifications	
Pin	Single
1	AC Input (L)
2	AC Input (N)
3	+V Output
4	-V Output

Notes:

All dimensions are typical in millimeters (inches).

General Tolerance: ± 0.05 (± 0.002), ≤ 2 mm

± 0.10 (± 0.004), $> 2 \sim 10$ mm

± 0.20 (± 0.008), > 10 mm

