


3-Electrode Gas Discharge Tubes

1: Dimension(mm)

20KA
Surface Mount

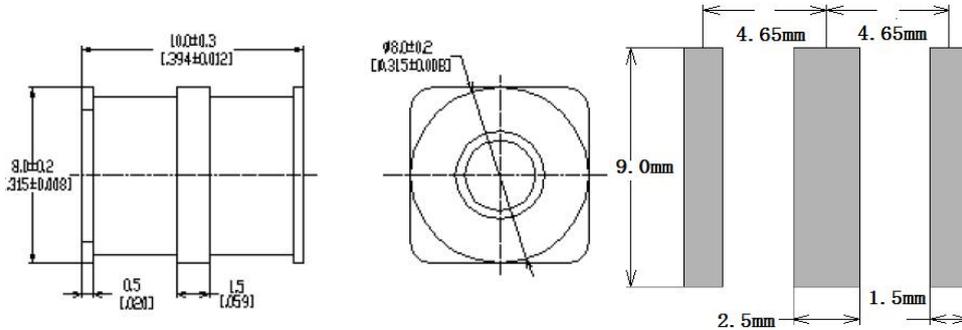

2: Main Applications

- PCI Cards protection
- Telephone/Fax/Modem protection
- single line protection
- ADSL/XDSL Splitter, Power Supply
- Surge Protection Device/Surge Protector

3: Features

- 100% Lead-Free (RoHS Compliant)
- Non-Radioactive
- Low capacitance: $\leq 1\text{pF}$
- Small size: $\Phi 8 \times 10\text{mm}$
- Safety certification: File number: E505240

4 Electrical Characteristics

Part Number	DC Spark-over Voltage @100V/S	Impulse Spark-over Voltage @100V/ μs	Impulse Spark-over Voltage @1KV/ μs	Insulation Resistance G Ω	Impulse discharge current 8/20 μs 10 Times	Impulse Life 300 hits 10x1000 μs	AC discharge current 50Hz, 1s 10times	Delivery time days	UL Certificate UL497B
HA3R8-75HSMD	75V $\pm 20\%$	$\leq 500\text{V}$	$\leq 600\text{V}$	$> 1\text{G}\Omega$	20KA	200A	20A	15days	E505240
HA3R8-90HSMD	90V $\pm 20\%$	$\leq 500\text{V}$	$\leq 600\text{V}$	$> 1\text{G}\Omega$	20KA	200A	20A	15days	E505240
HA3R8-140HSMD	140V $\pm 20\%$	$\leq 500\text{V}$	$\leq 600\text{V}$	$> 1\text{G}\Omega$	20KA	200A	20A	15days	E505240
HA3R8-150HSMD	150V $\pm 20\%$	$\leq 500\text{V}$	$\leq 600\text{V}$	$> 1\text{G}\Omega$	20KA	200A	20A	15days	E505240
HA3R8-200HSMD	200V $\pm 20\%$	$\leq 600\text{V}$	$\leq 700\text{V}$	$> 1\text{G}\Omega$	20KA	200A	20A	15days	E505240
HA3R8-230HSMD	230V $\pm 20\%$	$\leq 600\text{V}$	$\leq 700\text{V}$	$> 1\text{G}\Omega$	20KA	200A	20A	15days	E505240
HA3R8-250HSMD	250V $\pm 20\%$	$\leq 600\text{V}$	$\leq 700\text{V}$	$> 1\text{G}\Omega$	20KA	200A	20A	15days	E505240
HA3R8-300HSMD	300V $\pm 20\%$	$\leq 800\text{V}$	$\leq 900\text{V}$	$> 1\text{G}\Omega$	20KA	200A	20A	15days	E505240
HA3R8-350HSMD	350V $\pm 20\%$	$\leq 900\text{V}$	$\leq 1000\text{V}$	$> 1\text{G}\Omega$	20KA	200A	20A	15days	E505240
HA3R8-400HSMD	400V $\pm 20\%$	$\leq 900\text{V}$	$\leq 1000\text{V}$	$> 1\text{G}\Omega$	20KA	200A	20A	15days	E505240
HA3R8-420HSMD	420V $\pm 20\%$	$\leq 900\text{V}$	$\leq 1000\text{V}$	$> 1\text{G}\Omega$	20KA	200A	20A	15days	E505240
HA3R8-470HSMD	470V $\pm 20\%$	$\leq 1100\text{V}$	$\leq 1200\text{V}$	$> 1\text{G}\Omega$	20KA	200A	20A	15days	E505240
HA3R8-500HSMD	500V $\pm 20\%$	$\leq 1100\text{V}$	$\leq 1200\text{V}$	$> 1\text{G}\Omega$	20KA	200A	20A	15days	E505240
HA3R8-550HSMD	550V $\pm 20\%$	$\leq 1300\text{V}$	$\leq 1400\text{V}$	$> 1\text{G}\Omega$	20KA	200A	20A	15days	E505240
HA3R8-600HSMD	600V $\pm 20\%$	$\leq 1300\text{V}$	$\leq 1400\text{V}$	$> 1\text{G}\Omega$	20KA	200A	20A	15days	E505240
HA3R8-800HSMD	800V $\pm 20\%$	$\leq 1500\text{V}$	$\leq 1600\text{V}$	$> 1\text{G}\Omega$	20KA	200A	20A	15days	E505240

3-Electrode Gas Discharge Tubes

20KA

1:At delivery AQL 0.65 leave II Military Standard 105 E

2:In ionized mode

3:Test according to ITU-T Rec.k.12


Environmental resistance

Storage temperature:	-40°C---+90°C
Operating temperature:	-40°C---+90°C
Electrode:	Tin Plated

Example Part Number: HA3R8-90HSMD

HA	=	HUAAN
3	=	3 Electrode device
R	=	Gas Discharge Tube
8	=	8mm Diameter
90	=	90V
H	=	High Surge 20KA
SMD	=	Surface-mount

Reflow Soldering Curve

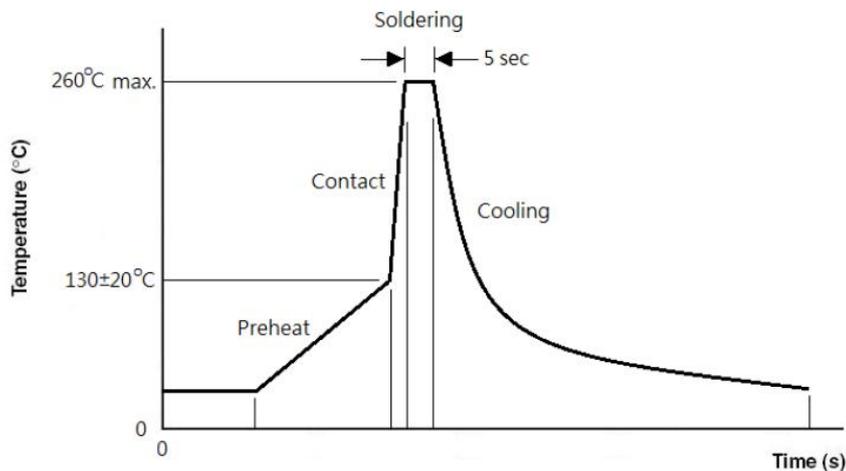

Packaging Quantity

Part Number	Quantity	
	Per Reel	Per Carton
HA3R8-xxxHSMD Series	500PCS	3000PCS