

General Description

The SY20815A incorporates an ultra-low $R_{DS(ON)}$ switch with a dedicated ON pin, enabling independent ON/OFF control.

The SY20815A features a low quiescent current of 300nA in the ON state, and it drops to 100nA in shutdown mode. This ultra-low current consumption significantly extends battery life, making the SY20815A an ideal choice for IoT applications.

Features

- Low $R_{DS(ON)}$: 80m Ω
- 1.5A Continuous Load Current Capability
- 300nA Quiescent Current
- 100nA Shutdown Current
- Independent ON/OFF Control Input
- Ultra Compact CSP0.79×0.79-4 0.3mm Package
- RoHS Compliant and Halogen Free

Applications

- Smartphones, Tablet PCs
- MIDs, E-Books
- Storage, DSLR, and Portable Devices

Typical Application

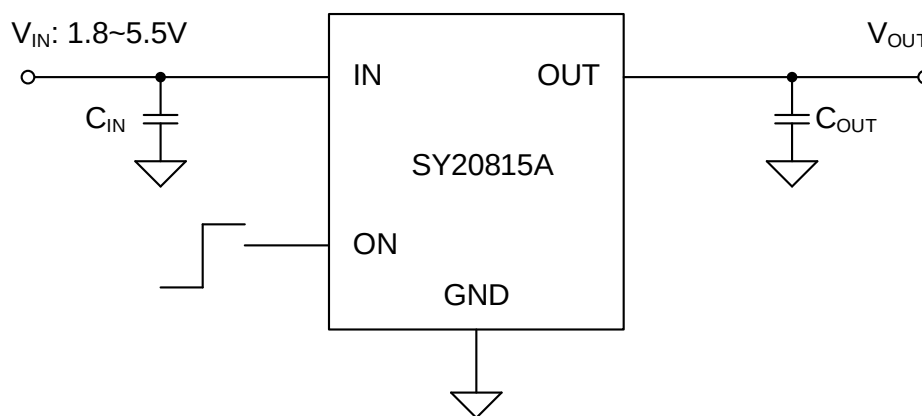


Figure 1. Schematic Diagram


Ordering Information

Ordering Number	Package Type	Top Mark
SY20815APRC	CSP0.79×0.79-4 RoHS Compliant and Halogen Free	eRxyz

Device code: eR

x=year code, y=week code, z= lot number code

Pinout (Top View)

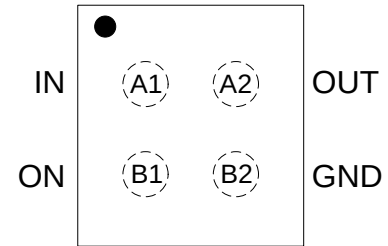

(CSP0.79×0.79-4)

Pin Name	Pin Number	Pin Description
IN	A1	Input pin. Decouple this pin to GND with at least a 4.7μF ceramic cap.
OUT	A2	Output pin. Decouple this pin to GND with at least a 4.7μF ceramic cap.
GND	B2	Ground pin.
ON	B1	ON/OFF control. Active high. Do not leave it floating.

Block Diagram

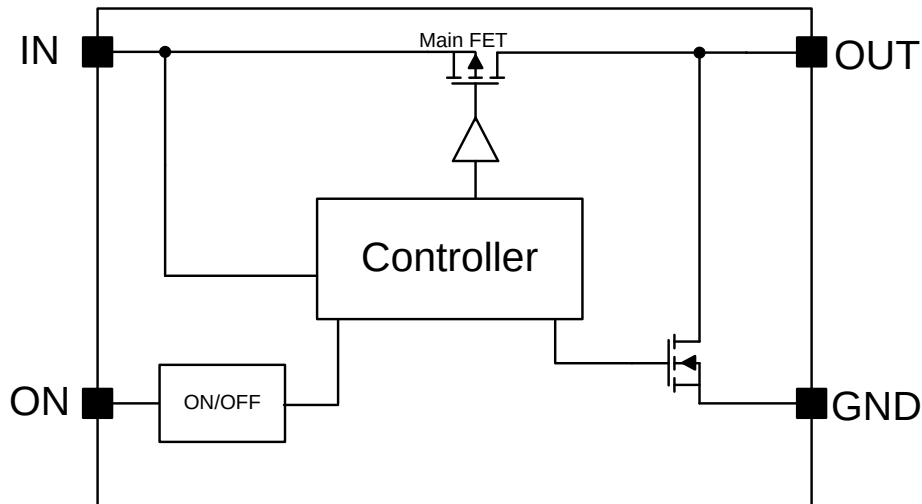


Figure 2. Block Diagram

Absolute Maximum Ratings

Parameter (Note 1)	Min	Max	Unit
IN, OUT, ON		6	V
Lead Temperature (Soldering, 10s)		260	
Junction Temperature, Operating	-40	150	°C
Storage Temperature	-65	150	

Thermal Information

Parameter (Note 2)	Typ	Unit
θ_{JA} Junction-to-Ambient Thermal Resistance	188	°C/W
θ_{JC} Junction-to-Case Thermal Resistance	2	
P_D Power Dissipation $T_A = 25^\circ\text{C}$	0.66	W

Recommended Operating Conditions

Parameter (Note 3)	Min	Max	Unit
IN	1.8	5.5	V
ON, OUT	0	5.5	
Junction Temperature, Operating	-40	125	°C
Ambient Temperature	-40	85	

Electrical Characteristics

($V_{IN} = 3.3\text{V}$, $T_A = 25^\circ\text{C}$ unless otherwise specified)






Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Input Voltage Range	V_{IN}		1.8		5.5	V
Shutdown Current	I_{SHDN}	ON=low			100	nA
Quiescent Current	I_Q	$I_{OUT}=0$			300	nA
FET R_{ON}	$R_{DS(ON)}$	$V_{IN}=5\text{V}$		80		m Ω
		$V_{IN}=3.3\text{V}$		95		m Ω
		$V_{IN}=1.8\text{V}$		155		m Ω
Output Voltage Rise Time	t_{RISE}	$V_{IN}=3.3\text{V}$, measure time V_{OUT} rise from 10% of V_{IN} to 90% of V_{IN}	55	85	115	μs
Turn On Delay Time	t_{DELAY}	$V_{IN}=3.3\text{V}$, measure time from EN rise edge to 10% of V_{IN}	45	75	105	μs
ON Input Logic High	V_{IH}		1.0			V
ON Input Logic Low	V_{IL}				0.4	V
Output Discharge Resister	R_{DIS}	$V_{IN}=5\text{V}$, ON=Low		8.5		Ω

Note 1: Stresses beyond the “Absolute Maximum Ratings” may cause permanent damage to the device. These are stress ratings only. Functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Note 2: θ_{JA} is measured in the natural convection at $T_A = 25^\circ\text{C}$ on a low effective single-layer thermal conductivity test board of JEDEC 51-3 thermal measurement standard.


Note 3: The device is not guaranteed to function outside its operating conditions.

Typical Performance Characteristics

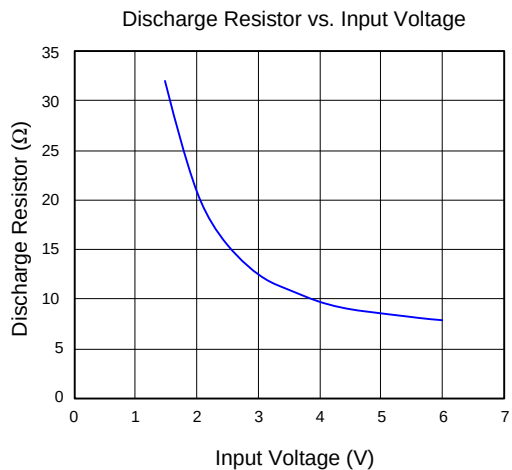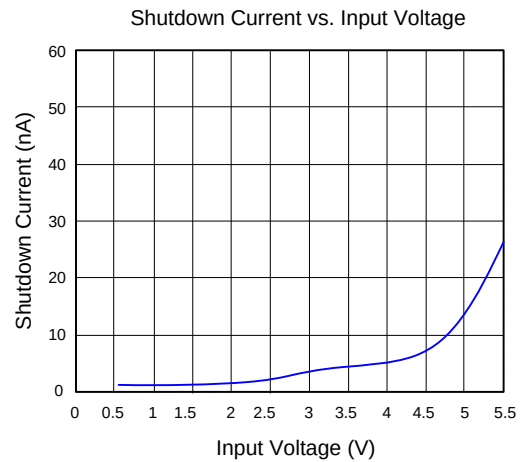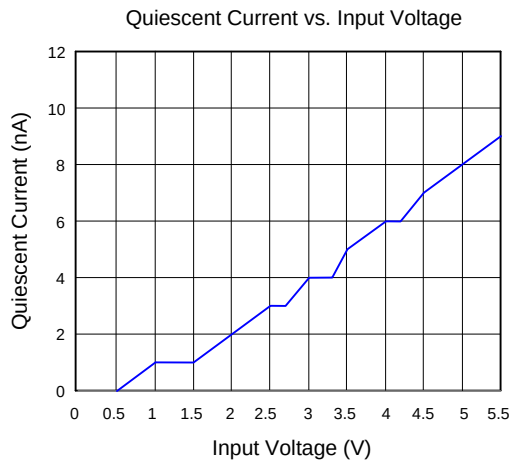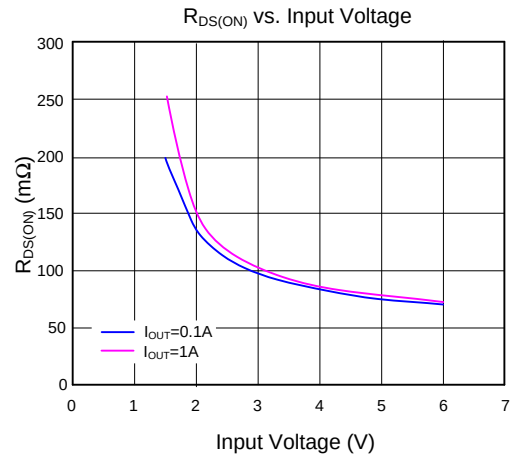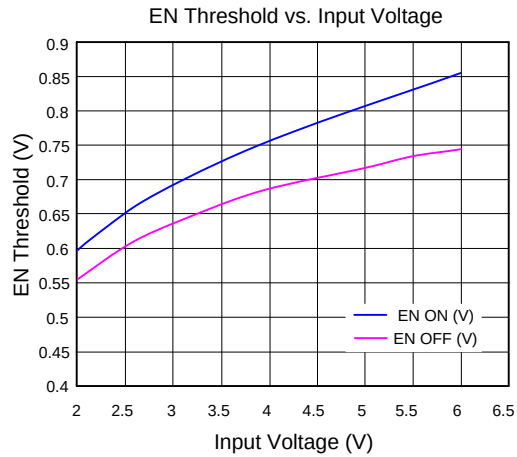

Startup from Enable


($V_{IN}=3.3V$, $C_{IN}=C_{OUT}=4.7\mu F$, $I_{OUT}=1A$)

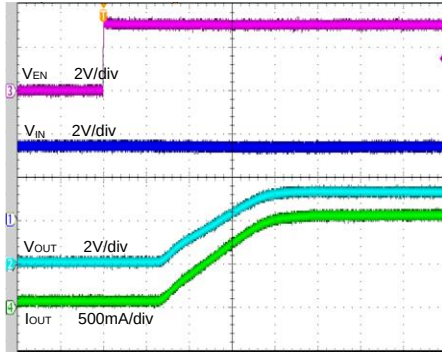

Time (40μs/div)

Shutdown from Enable


($V_{IN}=3.3V$, $C_{IN}=C_{OUT}=4.7\mu F$, $I_{OUT}=1A$)

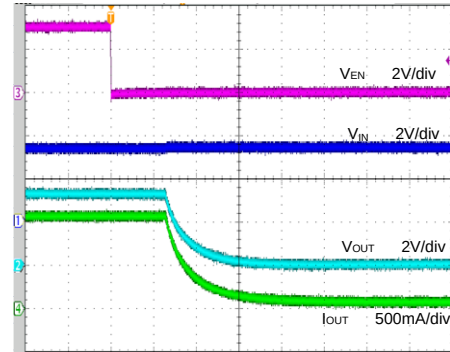

Time (20μs/div)

Startup from V_{IN}


($V_{IN}=EN=3.3V$, $C_{IN}=C_{OUT}=4.7\mu F$, $I_{OUT}=1A$)

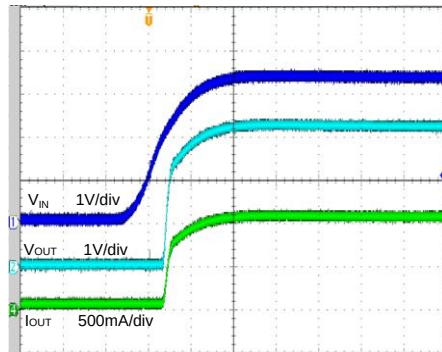

Time (400μs/div)

Shutdown from V_{IN}

($V_{IN}=EN=3.3V$, $C_{IN}=C_{OUT}=4.7\mu F$, $I_{OUT}=1A$)

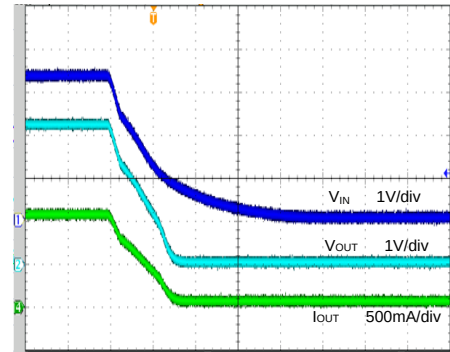

Time (4ms/div)

Operation Information

The SY20815A incorporates an ultra-low $R_{DS(ON)}$ switch with a dedicated ON pin, enabling independent ON/OFF control.

The SY20815A features a low quiescent current of 300nA in the ON state, and it drops to 100nA in shutdown mode. This ultra-low current consumption significantly extends battery life, making the SY20815A an ideal choice for IoT applications.

Input Capacitor C_{IN} :

To minimize device inrush current, it is recommended to use a 1 μ F ceramic capacitor, C_{IN} . Using a higher value of C_{IN} can further decrease the voltage drop as the switch is turned on with a large capacitive load. To minimize potential noise issues, it is essential to place C_{IN} close to the IN and GND pins.

Output Capacitor C_{OUT} :

A 4.7 μ F ceramic output capacitor is recommended to prevent parasitic board inductance from forcing V_{OUT} below GND when switching off.

Output Discharge:

The SY20815B integrates an 8.5 Ω pull-down resistor for quick output discharge. The resistor is activated when the switch is turned off.

PCB Layout Design:

For best performance of the SY20815A, the following guidelines must be followed:

1. Keep all power traces as short and wide as possible. It's recommended to use a 2-layer or 4-layer board for thermal performance and better capability of current flow. These power pins include IN and OUT.
2. Input and output capacitors should be placed close to the device and connected to the ground plane to reduce noise coupling.

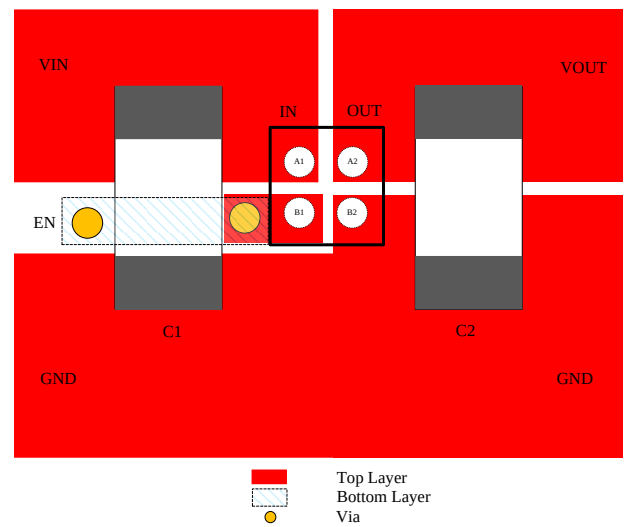


Figure 3. PCB Layout Suggestion

Schematic


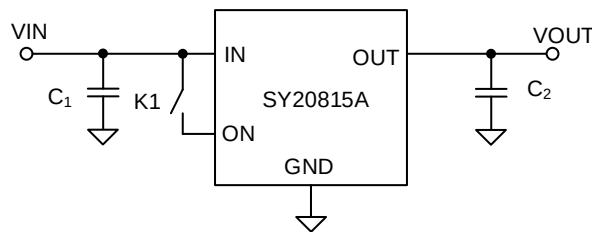


Figure 4. Schematic Diagram


BOM List

Designator	Description	Part Number	Manufacturer
C1	4.7 μ F/16V, 0603, X5R	GRM185R61C475K	Murata
C2	4.7 μ F/16V, 0603, X5R	GRM185R61C475K	Murata


CSP0.79×0.79-4 Package Outline Drawing

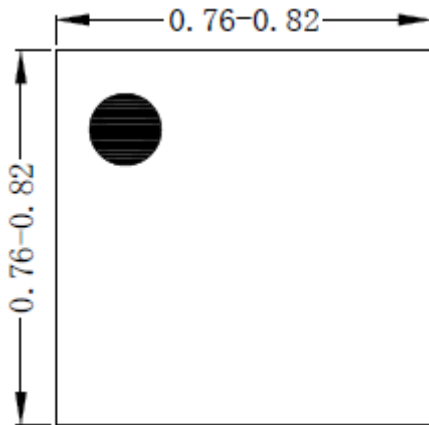


Top View

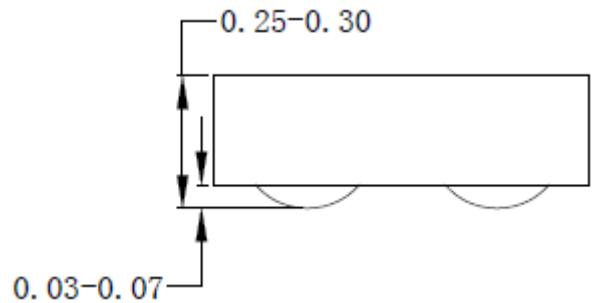

Side View

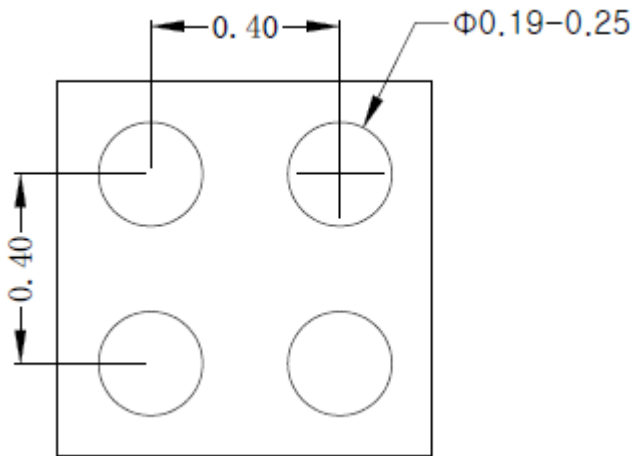

Bottom View

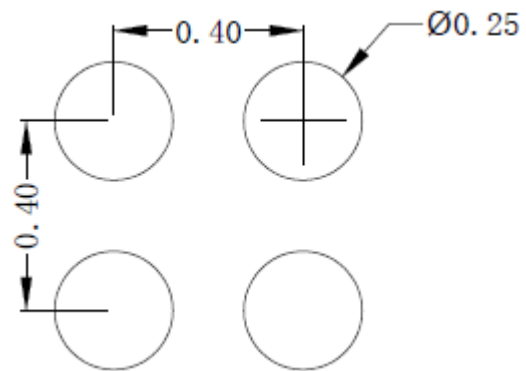


Recommended PCB Layout
(Reference Only)


Note: All dimensions are in millimeters and exclude mold flash and metal burr.

Taping & Reel Specification

CSP0.79×0.79 Taping Orientation

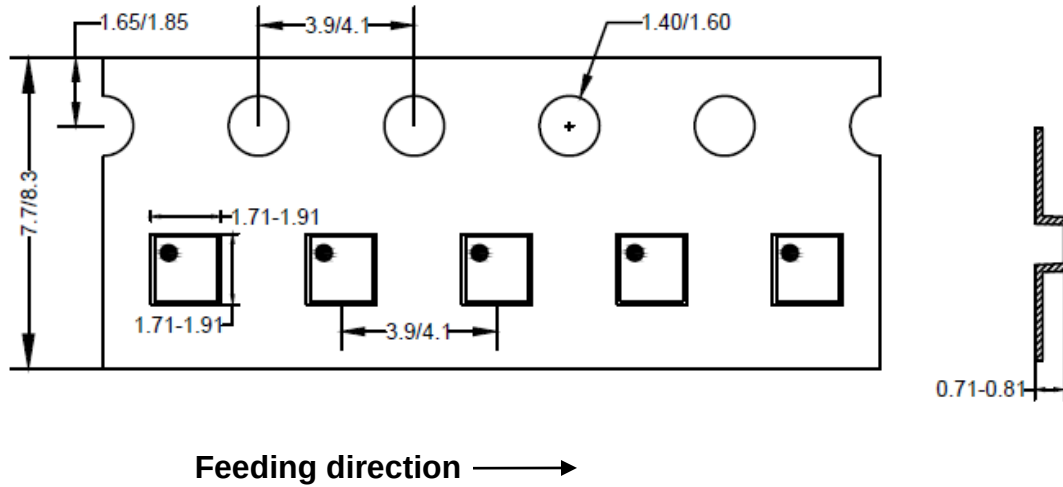

Carrier Tape & Reel Specification for Packages

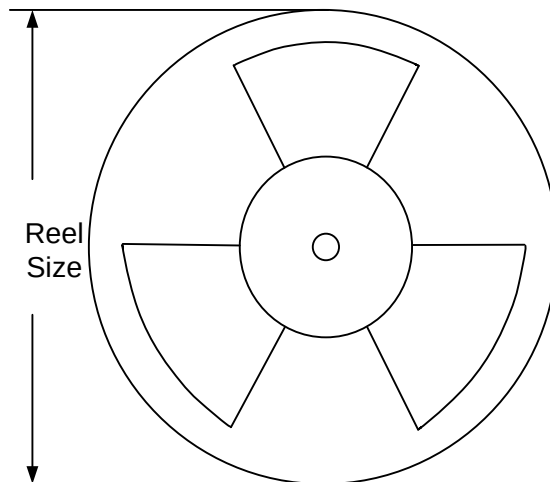

Package type	Tape width (mm)	Pocket pitch (mm)	Reel size (Inch)	Trailer length (mm)	Leader length (mm)	Qty per reel
CSP0.79×0.79	8	4	7"	400	160	10000



Revision History

The revision history provided is for informational purpose only and is believed to be accurate, however, not warranted. Please make sure that you have the latest revision.

Date	Revision	Change
Jan.12, 2024	Revision 1.0	Language improvements for clarity.
Jul.09, 2018	Revision 0.9A	"Features" page1: Change from "1A Continuous Load Current Capability" to "1.5A Continuous Load Current Capability".
Mar.09, 2018	Revision 0.9	Initial Release



IMPORTANT NOTICE

1. **Right to make changes.** Silergy and its subsidiaries (hereafter Silergy) reserve the right to change any information published in this document, including but not limited to circuitry, specification and/or product design, manufacturing or descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products are sold subject to Silergy's standard terms and conditions of sale.
2. **Applications.** Application examples that are described herein for any of these products are for illustrative purposes only. Silergy makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification. Buyers are responsible for the design and operation of their applications and products using Silergy products. Silergy or its subsidiaries assume no liability for any application assistance or designs of customer products. It is customer's sole responsibility to determine whether the Silergy product is suitable and fit for the customer's applications and products planned. To minimize the risks associated with customer's products and applications, customer should provide adequate design and operating safeguards. Customer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Silergy assumes no liability related to any default, damage, costs or problem in the customer's applications or products, or the application or use by customer's third-party buyers. Customer will fully indemnify Silergy, its subsidiaries, and their representatives against any damages arising out of the use of any Silergy components in safety-critical applications. It is also buyers' sole responsibility to warrant and guarantee that any intellectual property rights of a third party are not infringed upon when integrating Silergy products into any application. Silergy assumes no responsibility for any said applications or for any use of any circuitry other than circuitry entirely embodied in a Silergy product.
3. **Limited warranty and liability.** Information furnished by Silergy in this document is believed to be accurate and reliable. However, Silergy makes no representation or warranty, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. In no event shall Silergy be liable for any indirect, incidental, punitive, special or consequential damages, including but not limited to lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges, whether or not such damages are based on tort or negligence, warranty, breach of contract or any other legal theory. Notwithstanding any damages that customer might incur for any reason whatsoever, Silergy' aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the Standard Terms and Conditions of Sale of Silergy.
4. **Suitability for use.** Customer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of Silergy components in its applications, notwithstanding any applications-related information or support that may be provided by Silergy. Silergy products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of a Silergy product can reasonably be expected to result in personal injury, death or severe property or environmental damage. Silergy assumes no liability for inclusion and/or use of Silergy products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.
5. **Terms and conditions of commercial sale.** Silergy products are sold subject to the standard terms and conditions of commercial sale, as published at <http://www.silergy.com/stdterms>, unless otherwise agreed in a valid written individual agreement specifically agreed to in writing by an authorized officer of Silergy. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. Silergy hereby expressly objects to and denies the application of any customer's general terms and conditions with regard to the purchase of Silergy products by the customer.
6. **No offer to sell or license.** Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights. Silergy makes no representation or warranty that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right. Information published by Silergy regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from Silergy under the patents or other intellectual property of Silergy.

For more information, please visit: www.silergy.com

© 2018 Silergy Corp.

All Rights Reserved.