

General Description

The SY20831F is an ultra-low $R_{DS(ON)}$ power distribution switch with a 1.57A fixed current limit to protect the power source from over-current and short-circuit conditions. It incorporates overtemperature protection and a reverse blocking function.

The SY20831F is available in a compact SOT23-5 package.

Applications

- USB 3.1 Applications
- USB 3G Data Cards
- USB Dongles
- USB Chargers
- Multi-USB Chargers
- PC Card Hot-Swap Applications

Features

- Input Voltage: 2.5V to 5.5V
- Extremely Low Power Path Resistance: 65m Ω (Typ.)
- 1.57A \pm 10% Current Limit Accuracy
- Reverse Blocking (No Body Diode)
- Fast Reverse Recovery
- Fault Flag (OCB) Output for Over-Current and Fault Conditions
- During Shutdown, OUT Can Be Forced Higher than IN
- Built-In Soft-Start
- RoHS Compliant and Halogen-Free
- Compact Package Minimizes Board Space: SOT23-5

Typical Application

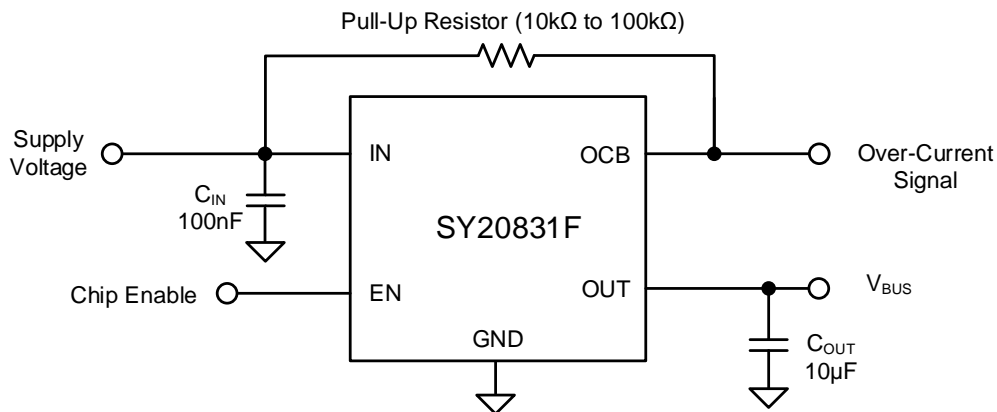


Figure 1. Schematic Diagram


Ordering Information

Ordering Part Number	Package Type	Top Mark
SY20831FAAT	SOT23-5 RoHS Compliant and Halogen Free	KCYxyz

Device code: KCY

x=year code, y=week code, z= lot number code

Pinout (Top View)

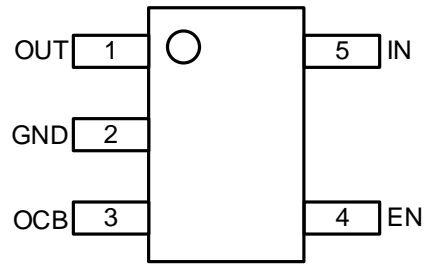

Pin Description

Pin Name	Pin Number	Pin Description
OUT	1	Output pin, decoupled with a 10 μ F capacitor from the IN to the GND, as close to the IC as possible.
GND	2	Ground pin.
OCB	3	Active low, open-drain fault flag. Asserted during over-current or over-temperature.
EN	4	ON/OFF control. Do not leave floating. A logic high turns on the power switch.
IN	5	Input pin, decoupled with a 100nF capacitor from the IN to the GND, as close to the IC as possible.

Block Diagram

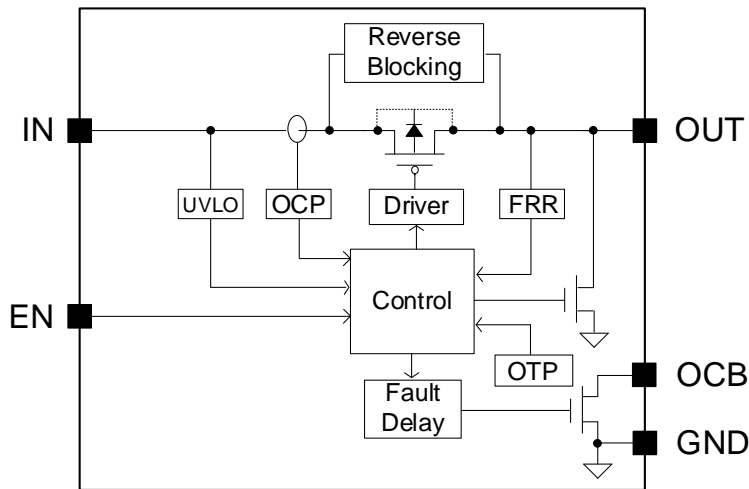


Figure 2. Block Diagram

Absolute Maximum Ratings

Parameter (Note 1)	Min	Max	Unit
IN, OUT, OCB, EN	-0.3	6	V
Lead Temperature (Soldering, 10 sec.)		260	°C
Junction Temperature, Operating	-40	150	
Storage Temperature	-65	150	

Thermal Information

Parameter (Note 2)	Typ	Unit
θ_{JA} Junction-to-ambient Thermal Resistance	89.8	°C/W
θ_{JC} Junction-to-case Thermal Resistance	9.9	
P_D Power Dissipation $T_A = 25^\circ\text{C}$	1.1	W

Recommended Operating Conditions

Parameter (Note 3)	Min	Max	Unit
IN, OUT	2.5	5.5	V
OCB, EN	0	5.5	
Junction Temperature, Operating	-40	125	°C
Ambient Temperature	-40	85	

Electrical Characteristics

($V_{IN} = 5\text{V}$, $C_{OUT} = 10\mu\text{F}$, $T_J = -40^\circ\text{C}$ to 125°C , typical values are at $T_J = 25^\circ\text{C}$ unless otherwise specified. (Note 4))

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Input Voltage Range	V_{IN}		2.5		5.5	V
IN UVLO Threshold	$V_{IN,UVLO}$	$T_J = -40^\circ\text{C}$ to 85°C			2.45	V
IN UVLO Hysteresis	$V_{IN,HYS}$			0.1		V
Shutdown Input Current	I_{SHDN}	Open load, switch off $T_J = -40^\circ\text{C}$ to 85°C		0.1	5	μA
		Output grounded, switch off $T_J = -40^\circ\text{C}$ to 85°C		0.1	5	μA
Reverse Leakage Current		IN tie to GND, $V_{OUT} = 5\text{V}$ $T_J = -40^\circ\text{C}$ to 85°C		0.1	5	μA
Reverse Blocking Threshold	V_{RBT}	IN tied to GND, $V_{OUT} = 5\text{V}$		100		mV
Reverse Blocking Recovery Threshold	V_{RBT_REC}	$V_{OUT} - V_{IN}$		-30		mV
Quiescent Supply Current	I_Q	Open load, switch on $T_J = -40^\circ\text{C}$ to 85°C		45	100	μA
FET $R_{DS(ON)}$	$R_{DS(ON)}$	$V_{IN} = 5\text{V}$, $I_{OUT} = 0.5\text{A}$ $T_J = -40^\circ\text{C}$ to 85°C		65	100	$\text{m}\Omega$
Current Limit Threshold	I_{LIM}	Output current increases until OCB low, $T_A = 25^\circ\text{C}$	1420	1570	1720	mA
EN Threshold	Logic-Low Voltage	V_{IL}			0.4	V
	Logic-High Voltage	V_{IH}	1.0			V

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
EN Input Capacitor	C _{EN}	(Note 5)		1		pF
EN Leakage Current	I _{ENLK}				1	μA
Output Turn-On Rise Time	t _R	R _L =100Ω, C _L =1μF. Measure from V _{OUT} =10% of V _{IN} to 90% of V _{IN}		0.55		ms
Output Turn-Off Fall Time	t _F	R _L =100Ω, C _L =1μF. Measure from V _{OUT} =90% of V _{IN} to 10% of V _{IN}		126		μs
OCB Low Resistance	R _{OCB}	V _{IN} =5V, I _L =10μA		9		Ω
		V _{IN} =3.3V, I _L =10μA		12		
OUT Shutdown Discharge Resistance	R _{D_{SG}}	EN=0V, V _{OUT} =0.1V	75	100	145	Ω
OCB Leakage Current	I _{LKG_OCB}	V _{OCB} =5V		0.01	1	μA
Fast Reverse Recovery Time	t _{FRR}	V _{IN} =3.3V, V _{OUT} =3.5V, C _L =1μF, OUT= 100Ω to GND. Remove 3.5V from OUT. Measure time from V _{OUT} thru 2.9V to V _{OUT} =3.2V (Note 5)			50	μs
Current-Limit Response Time	t _{OC_res}	I _{LOAD} =1.2I _{LIMIT} (Note 5)		15		μs
Over-Current Flag Response Time	t _{OCB}	I _{LOAD} =1.2I _{LIMIT}		10		ms
Reverse Blocking Response Time	t _{RBT}	(Note 5)		800		ns
Thermal Shutdown Temperature	T _{SD}	(Note 5)		150		°C
Thermal Shutdown Hysteresis	T _{HYS}	(Note 5)		20		°C

Note 1: Stresses beyond the “Absolute Maximum Ratings” may cause permanent damage to the device. These are stress ratings only. Functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.







Note 2: θ_{JA} is measured in the natural convection at T_A = 25°C on a Silergy’s test board. Pin 2 of SOT23-5 package is the case position for θ_{JC} measurement.

Note 3: The device is not guaranteed to function outside its operating conditions.


Note 4: Unless otherwise stated, limits are 100% production tested under pulsed load conditions such that T_A ≅ T_J= 25°C. Limits over the operating temperature range (see recommended operating conditions) and relevant voltage range(s) are guaranteed by design, test, or statistical correlation.

Note 5: Guaranteed by design but not production tested.


Typical Performance Characteristics

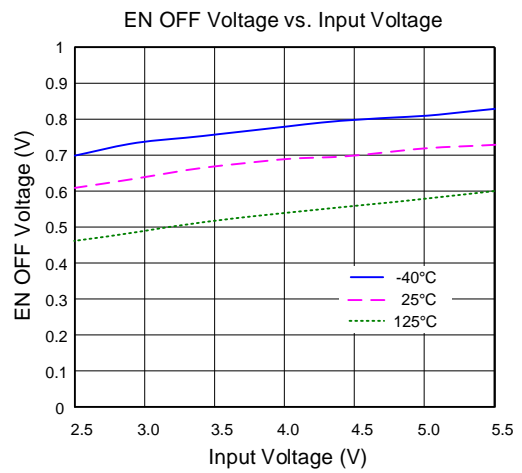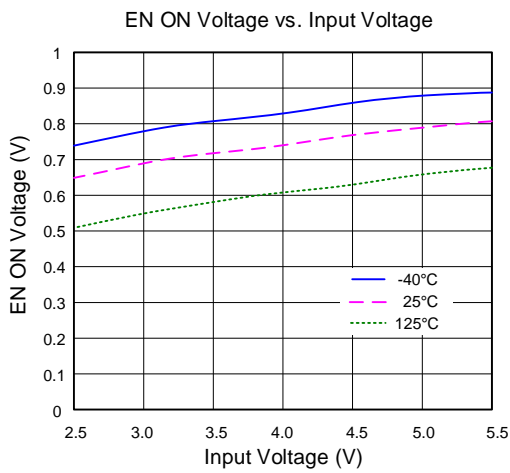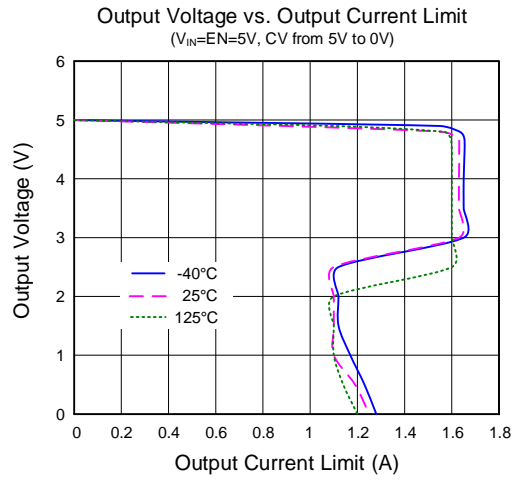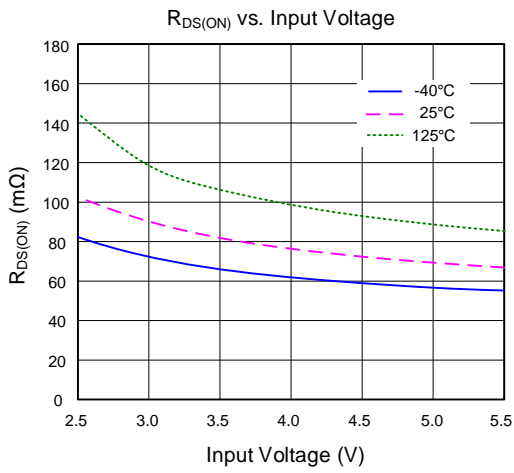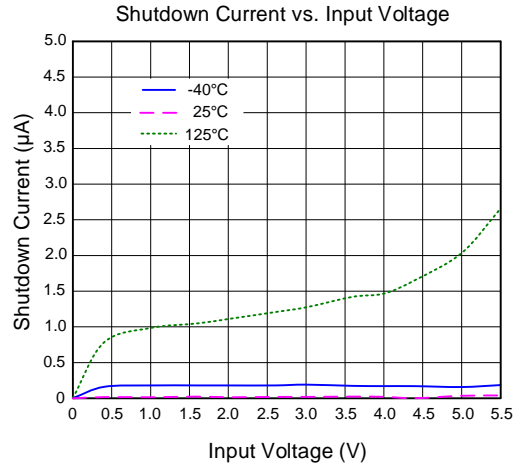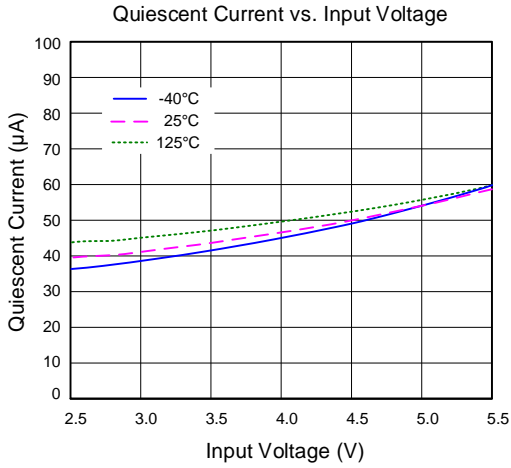


Reverse Leakage Current vs. Output Voltage
($E_N=0V$, I_{IN} short to GND)

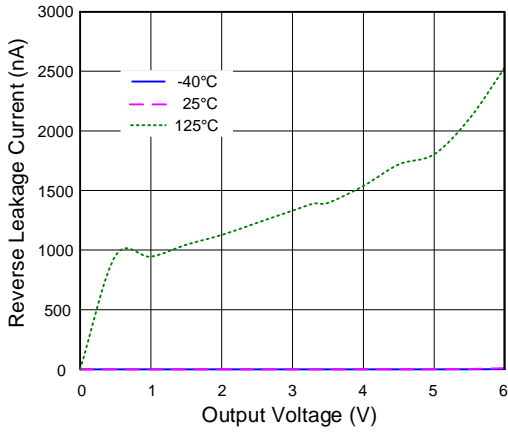

Reverse Blocking Threshold vs. Output Voltage
($E_N=V_{IN}$)

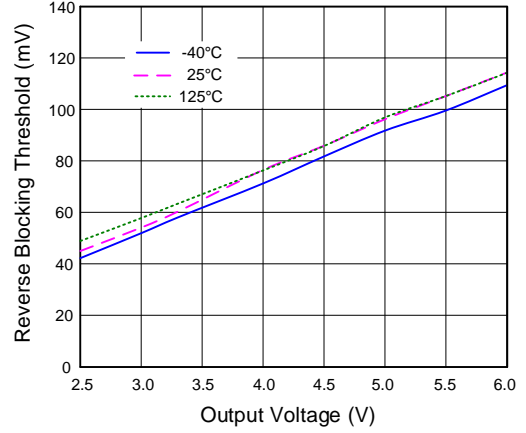


Startup from VIN
($V_{IN}=5V$, $C_{IN}=C_{OUT}=10\mu F$, 1.4A Load)

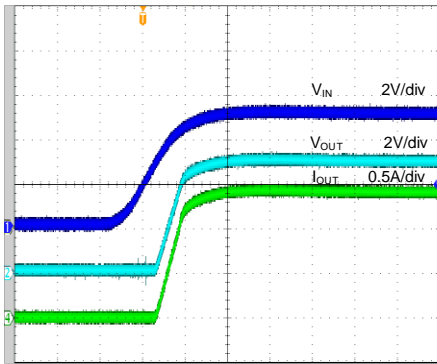


Time (400µs/div)

Shutdown from VIN
($V_{IN}=5V$, $C_{IN}=C_{OUT}=10\mu F$, 1.4A Load)

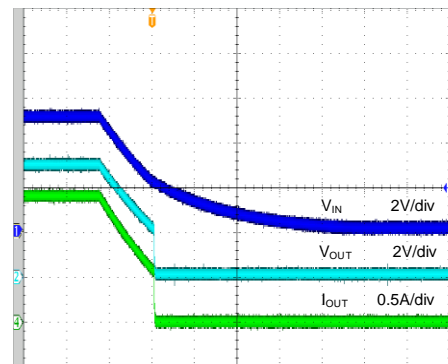


Time (4ms/div)

Startup from Enable
($V_{IN}=5V$, $C_{IN}=C_{OUT}=10\mu F$, 1.4A Load)

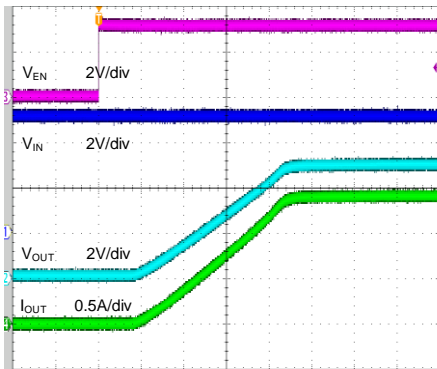


Time (200µs/div)


Shutdown from Enable
($V_{IN}=5V$, $C_{IN}=C_{OUT}=10\mu F$, 1.4A Load)

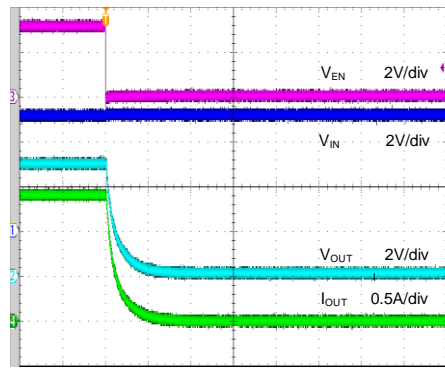


Time (100µs/div)

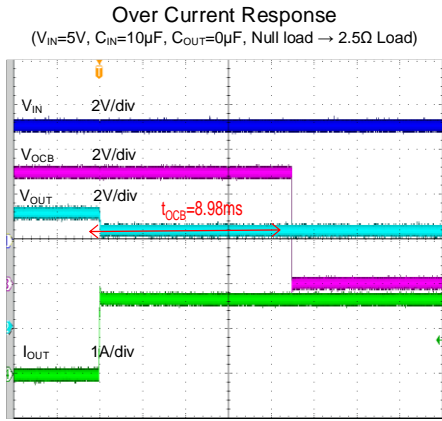


Time (2ms/div)

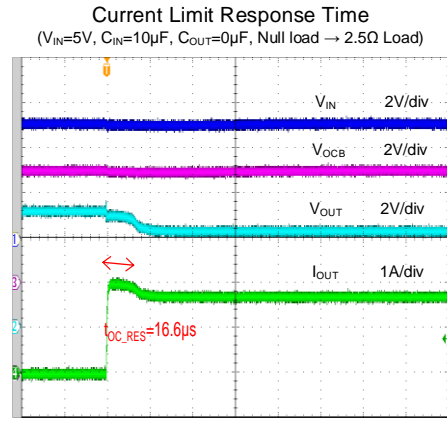

Time (20 μs /div)

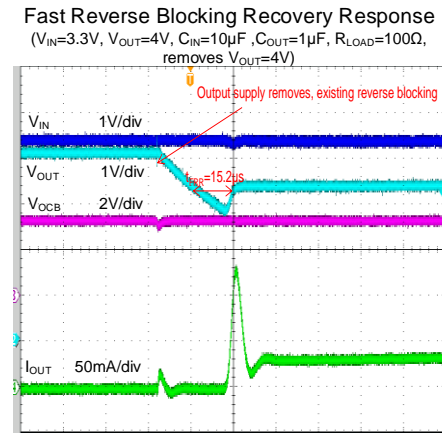

Time (20 μs /div)

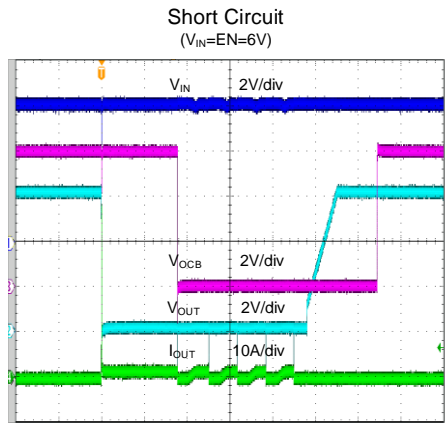

Time (800 μs /div)

Operation

The SY20831F is a current limited power switch designed for USB load-switching or hot-plug applications. It incorporates over-temperature protection and reverse blocking function, to prevent current flow from OUT to IN when OUT is externally forced to a higher voltage than IN.

Over Current Protection

The SY20831F integrates a 1.57A fixed current limit to protect the power source from over-current conditions. When an over-current condition is sensed, the gate of the pass MOSFET is modulated to achieve constant output current. If the over-current condition persists for a prolonged period, the junction temperature may exceed 150°C, and the overtemperature protection will shut down the device. Once the chip temperature drops below 130°C, the device will restart.

The current limit of the device is folded back to $67\% \times I_{LIMIT}$ to decrease power dissipation when $V_{OUT} < 50\% \times V_{IN}$.

Fault Flag (OCB)

The OCB output is asserted (active low) when thermal shutdown protection is triggered or an over-current condition persists for more than 10ms. The output remains asserted until the fault condition is removed. Connecting a heavy capacitance load to an enabled device can cause a momentary over-current condition.

Supply Filter Capacitor

In order to prevent the input voltage droop during hot-plug events, a 100nF ceramic capacitor from VIN to GND is strongly recommended. Higher capacitor values could reduce the voltage droop on the input further. An output short will cause ringing on the input without the input capacitor. It could destroy the internal circuitry when the input transient exceeds the absolute maximum voltage.

Output Filter Capacitor


A 10μF output ceramic capacitor should be placed close to the device and output connector to reduce voltage drop during load transient. Higher values of output capacitor can be used to further reduce the droop in high current applications.

Reverse Blocking Function

The SY20831F integrates a reverse block function. When the voltage at the OUT pin exceeds voltage at the IN pin by 100mV, the reverse block function is triggered. The power MOSFET will shut down in 800ns to block the reverse current flow from OUT to IN.

The device integrates a fast reverse recovery function, which enables V_{OUT} recovery to 3.2V within 50μs once V_{OUT} drops lower than V_{IN} after the device is already operating in reverse blocking mode.

Schematic

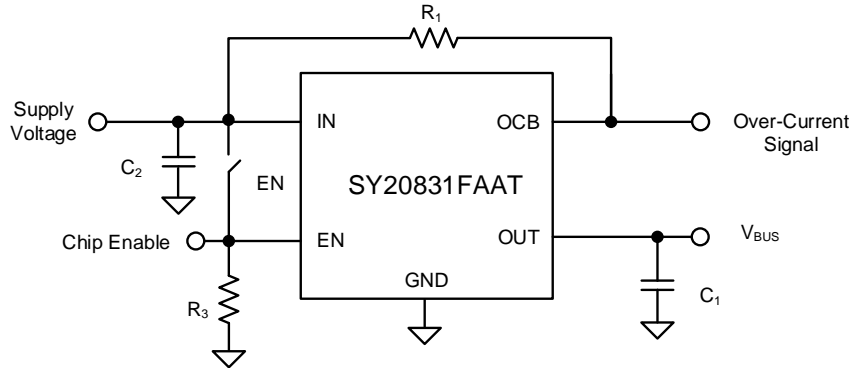

BOM List

Reference Designator	Description	Part Number	Manufacturer
C ₁	10μF/10V, 0805	GRM21BR71A106K	Murata
C ₂	100nF/50V, 0603	GRM188R61H104K	Murata
R ₁	100kΩ, 0603	RC0603FR-07100KL	YAGEO
R ₃	1MΩ, 0603	RC0603FR-071ML	YAGEO

PCB Layout Guide

For optimal performance of the SY20831F, the following guidelines must be adhered to:

- 1) Keep all VBUS traces as short and wide as possible and use 2 ounce copper traces.
- 2) Place the output capacitor as close to the connectors as possible to lower impedance (mainly inductance) between the port and the capacitor and improve transient performance.
- 3) Input and output capacitors should be placed closed to the IC and connected to ground plane to reduce noise coupling.





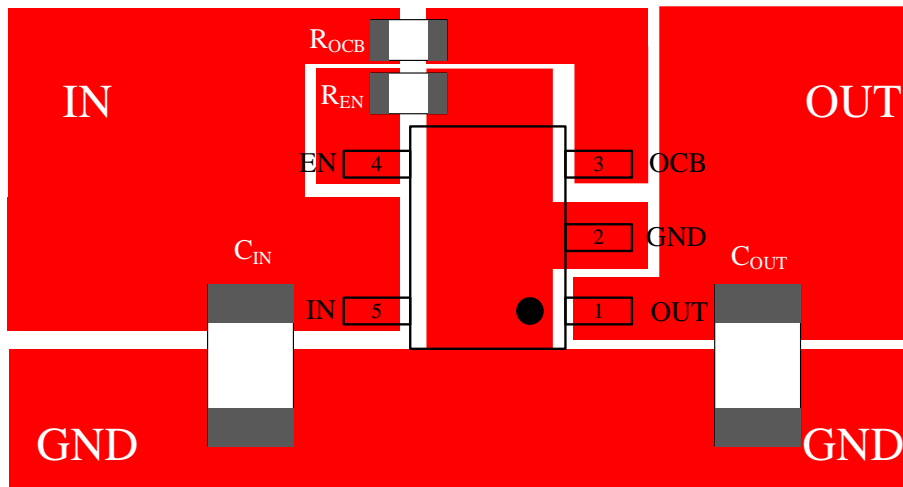


Figure 3. PCB Layout Suggestion

SOT23-5 Package Outline Drawing

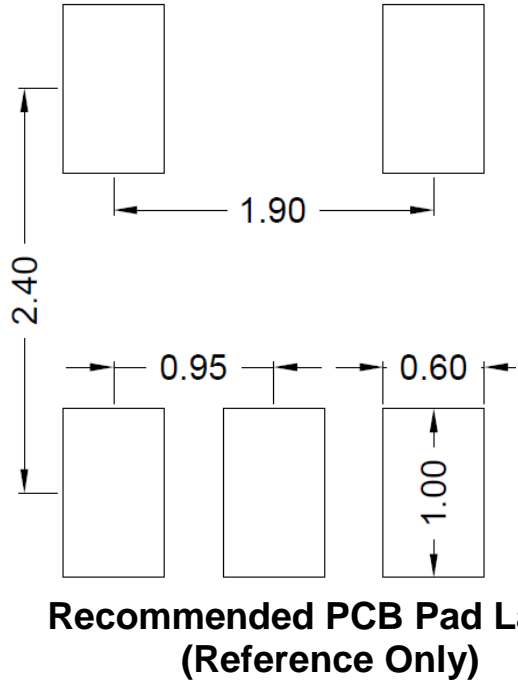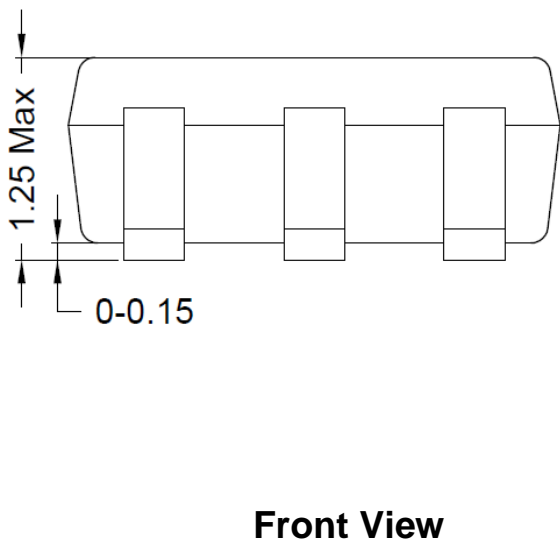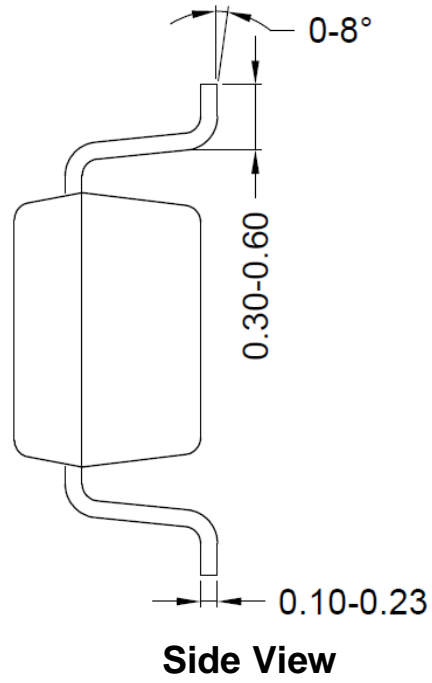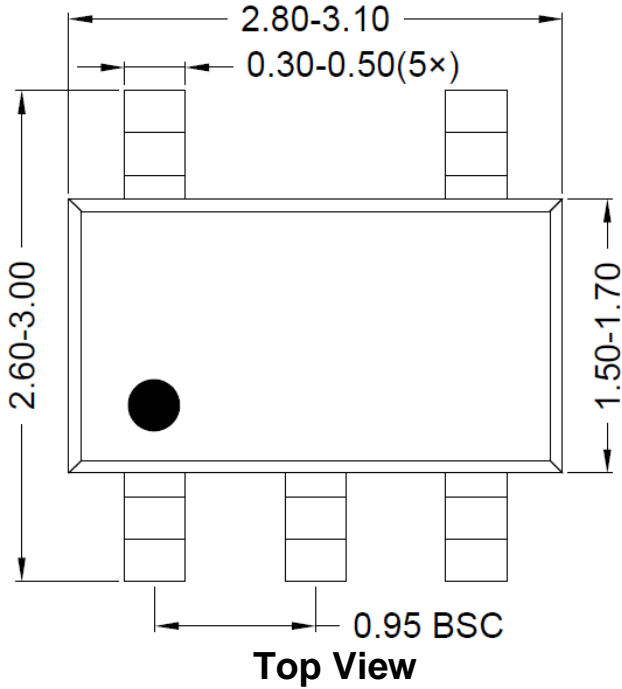


Note: All dimensions in millimeters and exclude mold flash & metal burr.


Tape and Reel Information

1. Tape Dimensions and Pin1 Orientation

SOT23-5

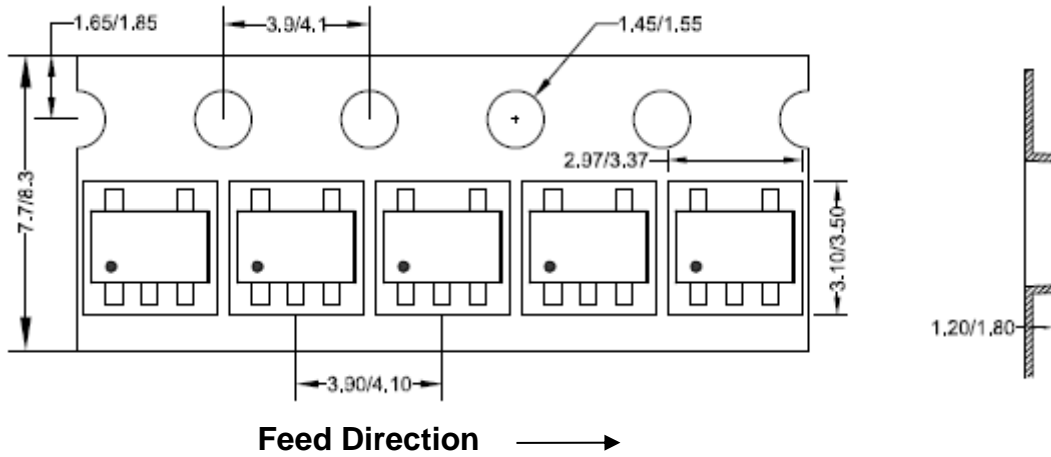

2. Reel Dimensions

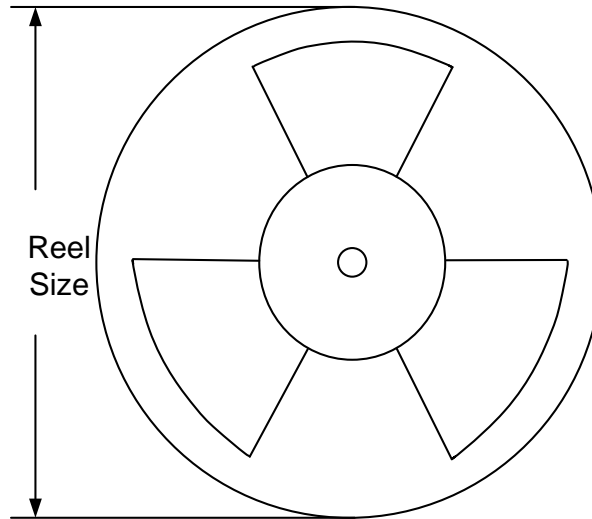

Package Type	Tape Width (mm)	Pocket Pitch (mm)	Reel Size (Inch)	Trailer Length (mm)	Leader Length (mm)	Qty Per Reel
SOT23-5	8	4	7"	280	160	3000

Revision History

The revision history provided is for informational purpose only and is believed to be accurate, however, not warranted. Please make sure that you have the latest revision.

Date	Revision	Change
Dec.25, 2024	Revision 1.0	Initial Release

IMPORTANT NOTICE

- 1. Right to make changes.** Silergy and its subsidiaries (hereafter Silergy) reserve the right to change any information published in this document, including but not limited to circuitry, specification and/or product design, manufacturing or descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products are sold subject to Silergy's standard terms and conditions of sale.
- 2. Applications.** Application examples that are described herein for any of these products are for illustrative purposes only. Silergy makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification. Buyers are responsible for the design and operation of their applications and products using Silergy products. Silergy or its subsidiaries assume no liability for any application assistance or designs of customer products. It is customer's sole responsibility to determine whether the Silergy product is suitable and fit for the customer's applications and products planned. To minimize the risks associated with customer's products and applications, customer should provide adequate design and operating safeguards. Customer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Silergy assumes no liability related to any default, damage, costs or problem in the customer's applications or products, or the application or use by customer's third-party buyers. Customer will fully indemnify Silergy, its subsidiaries, and their representatives against any damages arising out of the use of any Silergy components in safety-critical applications. It is also buyers' sole responsibility to warrant and guarantee that any intellectual property rights of a third party are not infringed upon when integrating Silergy products into any application. Silergy assumes no responsibility for any said applications or for any use of any circuitry other than circuitry entirely embodied in a Silergy product.
- 3. Limited warranty and liability.** Information furnished by Silergy in this document is believed to be accurate and reliable. However, Silergy makes no representation or warranty, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. In no event shall Silergy be liable for any indirect, incidental, punitive, special or consequential damages, including but not limited to lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges, whether or not such damages are based on tort or negligence, warranty, breach of contract or any other legal theory. Notwithstanding any damages that customer might incur for any reason whatsoever, Silergy' aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the Standard Terms and Conditions of Sale of Silergy.
- 4. Suitability for use.** Customer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of Silergy components in its applications, notwithstanding any applications-related information or support that may be provided by Silergy. Silergy products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an Silergy product can reasonably be expected to result in personal injury, death or severe property or environmental damage. Silergy assumes no liability for inclusion and/or use of Silergy products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.
- 5. Terms and conditions of commercial sale.** Silergy products are sold subject to the standard terms and conditions of commercial sale, as published at <http://www.silergy.com/stdterms>, unless otherwise agreed in a valid written individual agreement specifically agreed to in writing by an authorized officer of Silergy. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. Silergy hereby expressly objects to and denies the application of any customer's general terms and conditions with regard to the purchase of Silergy products by the customer.
- 6. No offer to sell or license.** Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights. Silergy makes no representation or warranty that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right. Information published by Silergy regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from Silergy under the patents or other intellectual property of Silergy.

For more information, please visit: www.silergy.com

© 2024 Silergy Corp.

All Rights Reserved.