



AiP74HC/HCT541

Octal Buffer/Line Driver; 3-state

Product Specification

Specification Revision History:

| Version | Date | Description |
|----------------|-------------|---------------------|
| 2012-06-A1 | 2012-06 | New |
| 2023-04-B1 | 2023-04 | Update the template |
| | | |
| | | |



1、 General Description

The AiP74HC/HCT541 is an octal non-inverting buffer/line driver with 3-state outputs. The device features two output enables ($\overline{OE}1$ and $\overline{OE}2$). A HIGH on $\overline{OE}n$ causes the outputs to assume a high-impedance OFF-state. Inputs include clamp diodes that enable the use of current limiting resistors to interface inputs to voltages in excess of V_{CC} .

Features:

- Input levels:
 - For AiP74HC541: CMOS level
 - For AiP74HCT541: TTL level
- Non-Inverting outputs
- Specified from -40°C to +125°C
- Packaging information: DIP20/SOP20/TSSOP20

**Ordering Information:****Tube packing specifications:**

| Part number | Packaging form | Marking code | Tube quantity | Boxed tube quantity | Boxed quantity | Notes |
|--------------------|----------------|--------------|----------------|---------------------|------------------|--|
| AiP74HC541DA20.TB | DIP20 | 74HC541 | 18 PCS/tube | 40 tube/box | 720 PCS/box | Dimensions of plastic enclosure: 26.3mm×6.4mm Pin spacing: 2.54mm |
| AiP74HCT541DA20.TB | DIP20 | 74HCT541 | 18 PCS/tube | 40 tube/box | 720 PCS/box | Dimensions of plastic enclosure: 26.3mm×6.4mm Pin spacing: 2.54mm |
| AiP74HC541SA20.TB | SOP20 | 74HC541 | 35 PCS/tube | 80 tube/box | 2800 PCS/box | Dimensions of plastic enclosure: 12.8mm×7.5mm Pin spacing: 1.27mm |
| AiP74HCT541SA20.TB | SOP20 | 74HCT541 | 35 PCS/tube | 80 tube/box | 2800 PCS/box | Dimensions of plastic enclosure: 12.8mm×7.5mm Pin spacing: 1.27mm |
| AiP74HC541TA20.TB | TSSOP20 | 74HC541 | 70 PCS/tube | 200 tube/box | 14000 PCS/box | Dimensions of plastic enclosure: 6.5mm×4.4mm Pin spacing: 0.65mm |
| AiP74HCT541TA20.TB | TSSOP20 | 74HCT541 | 70 PCS/tube | 200 tube/box | 14000 PCS/box | Dimensions of plastic enclosure: 6.5mm×4.4mm Pin spacing: 0.65mm |



Reel packing specifications:

| Part number | Packaging form | Marking code | Reel quantity | Boxed reel quantity | Notes |
|--------------------|----------------|--------------|---------------|---------------------|--|
| AiP74HC541SA20.TR | SOP20 | 74HC541 | 2000PCS/reel | 2000PCS/box | Dimensions of plastic enclosure: 12.8mm×7.5mm Pin spacing:1.27mm |
| AiP74HCT541SA20.TR | SOP20 | 74HCT541 | 2000PCS/reel | 2000PCS/box | Dimensions of plastic enclosure: 12.8mm×7.5mm Pin spacing:1.27mm |
| AiP74HC541TA20.TR | TSSOP20 | 74HC541 | 4000PCS/reel | 8000PCS/box | Dimensions of plastic enclosure: 6.5mm×4.4mm Pin spacing:0.65mm |
| AiP74HCT541TA20.TR | TSSOP20 | 74HCT541 | 4000PCS/reel | 8000PCS/box | Dimensions of plastic enclosure: 6.5mm×4.4mm Pin spacing:0.65mm |

Note: If the physical information is inconsistent with the ordering information, please refer to the actual product.



2、Block Diagram And Pin Description

2.1、Block Diagram

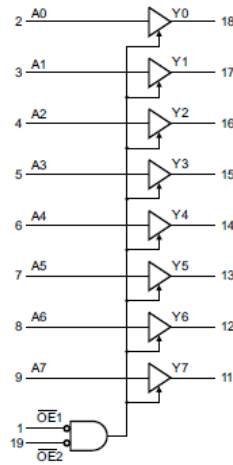


Figure 1. Logic symbol

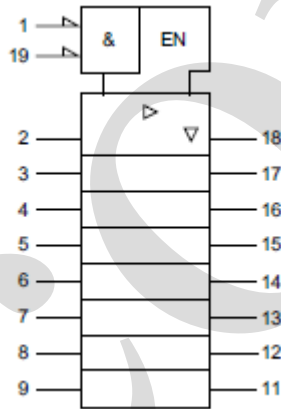


Figure 2. IEC logic symbol

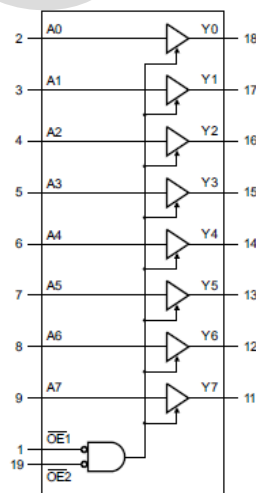


Figure 3. Functional diagram


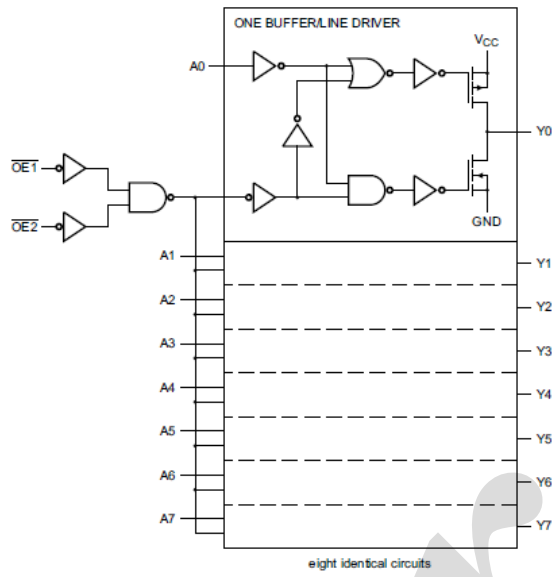


Figure 4. Logic diagram

2.2. Pin Configurations



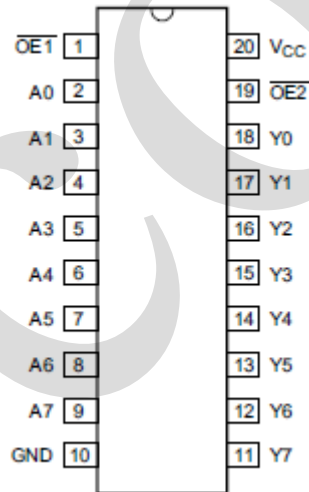

2.3、Pin Description

| Pin No. | Pin Name | Description |
|---------|------------------|----------------------------------|
| 1 | $\overline{OE1}$ | output enable input (active LOW) |
| 2 | A0 | data input |
| 3 | A1 | data input |
| 4 | A2 | data input |
| 5 | A3 | data input |
| 6 | A4 | data input |
| 7 | A5 | data input |
| 8 | A6 | data input |
| 9 | A7 | data input |
| 10 | GND | ground (0V) |
| 11 | Y7 | data output |
| 12 | Y6 | data output |
| 13 | Y5 | data output |
| 14 | Y4 | data output |
| 15 | Y3 | data output |
| 16 | Y2 | data output |
| 17 | Y1 | data output |
| 18 | Y0 | data output |
| 19 | $\overline{OE2}$ | output enable input (active LOW) |
| 20 | V _{CC} | supply voltage |

2.4、Function Table

| Input | | Output | |
|------------------|------------------|----------------|----------------|
| $\overline{OE1}$ | $\overline{OE2}$ | A _n | Y _n |
| L | L | L | L |
| L | L | H | H |
| X | H | X | Z |
| H | X | X | Z |

Note: H=HIGH voltage level; L=LOW voltage level; X=don't care; Z=high-impedance OFF-state.



3、Electrical Parameter

3.1、Absolute Maximum Ratings

(Voltages are referenced to GND (ground=0V), unless otherwise specified.)

| Parameter | Symbol | Conditions | Min. | Max. | Unit |
|-------------------------|-----------|--------------------------------------|-----------|----------|------|
| supply voltage | V_{CC} | - | -0.5 | +7.0 | V |
| input clamping current | I_{IK} | $V_I < -0.5V$ or $V_I > V_{CC}+0.5V$ | - | ± 20 | mA |
| output clamping current | I_{OK} | $V_O < -0.5V$ or $V_O > V_{CC}+0.5V$ | - | ± 20 | mA |
| output current | I_O | $-0.5V < V_O < V_{CC}+0.5V$ | - | ± 35 | mA |
| supply current | I_{CC} | - | - | 70 | mA |
| ground current | I_{GND} | - | -70 | - | mA |
| storage temperature | T_{stg} | - | -65 | +150 | °C |
| total power dissipation | P_{tot} | - | - | 500 | mW |
| Soldering temperature | T_L | 10s | DIP | 245 | °C |
| | | | SOP/TSSOP | 260 | |

3.2、Recommended Operating Conditions

| Parameter | Symbol | Conditions | Min. | Typ. | Max. | Unit |
|-------------------------------------|---------------------|---------------|------|------|----------|------|
| AiP74HC541 | | | | | | |
| supply voltage | V_{CC} | - | 2.0 | 5.0 | 6.0 | V |
| input voltage | V_I | - | 0 | - | V_{CC} | V |
| output voltage | V_O | - | 0 | - | V_{CC} | V |
| input transition rise and fall rate | $\Delta t/\Delta V$ | $V_{CC}=2.0V$ | - | - | 625 | ns/V |
| | | $V_{CC}=4.5V$ | - | 1.67 | 139 | ns/V |
| | | $V_{CC}=6.0V$ | - | - | 83 | ns/V |
| ambient temperature | T_{amb} | - | -40 | - | +125 | °C |
| AiP74HCT541 | | | | | | |
| supply voltage | V_{CC} | - | 4.5 | 5.0 | 5.5 | V |
| input voltage | V_I | - | 0 | - | V_{CC} | V |
| output voltage | V_O | - | 0 | - | V_{CC} | V |
| input transition rise and fall rate | $\Delta t/\Delta V$ | $V_{CC}=4.5V$ | - | 1.67 | 139 | ns/V |
| ambient temperature | T_{amb} | - | -40 | - | +125 | °C |



3.3、Electrical Characteristics

3.3.1、DC Characteristics 1

($T_{amb}=25^{\circ}C$, voltages are referenced to GND (ground=0V), unless otherwise specified.)

| Parameter | Symbol | Conditions | Min. | Typ. | Max. | Unit | |
|---------------------------|-----------------|--|-----------------------------|------|-----------|---------|---------|
| AiP74HC541 | | | | | | | |
| HIGH-level input voltage | V_{IH} | $V_{CC}=2.0V$ | 1.5 | 1.2 | - | V | |
| | | $V_{CC}=4.5V$ | 3.15 | 2.4 | - | V | |
| | | $V_{CC}=6.0V$ | 4.2 | 3.2 | - | V | |
| LOW-level input voltage | V_{IL} | $V_{CC}=2.0V$ | - | 0.8 | 0.5 | V | |
| | | $V_{CC}=4.5V$ | - | 2.1 | 1.35 | V | |
| | | $V_{CC}=6.0V$ | - | 2.8 | 1.8 | V | |
| HIGH-level output voltage | V_{OH} | $V_I = V_{IH} \text{ or } V_{IL}$ | $I_O=-20\mu A; V_{CC}=2.0V$ | 1.9 | 2.0 | - | V |
| | | | $I_O=-20\mu A; V_{CC}=4.5V$ | 4.4 | 4.5 | - | V |
| | | | $I_O=-20\mu A; V_{CC}=6.0V$ | 5.9 | 6.0 | - | V |
| | | | $I_O=-6.0mA; V_{CC}=4.5V$ | 3.98 | 4.32 | - | V |
| | | | $I_O=-7.8mA; V_{CC}=6.0V$ | 5.48 | 5.81 | - | V |
| LOW-level output voltage | V_{OL} | $V_I = V_{IH} \text{ or } V_{IL}$ | $I_O=20\mu A; V_{CC}=2.0V$ | - | 0 | 0.1 | V |
| | | | $I_O=20\mu A; V_{CC}=4.5V$ | - | 0 | 0.1 | V |
| | | | $I_O=20\mu A; V_{CC}=6.0V$ | - | 0 | 0.1 | V |
| | | | $I_O=6.0mA; V_{CC}=4.5V$ | - | 0.15 | 0.26 | V |
| | | | $I_O=7.8mA; V_{CC}=6.0V$ | - | 0.16 | 0.26 | V |
| input leakage current | I_I | $V_I=V_{CC} \text{ or } GND;$ $V_{CC}=6.0V$ | - | - | ± 1.0 | μA | |
| OFF-state output current | I_{OZ} | $V_I=V_{IH} \text{ or } V_{IL}; V_{CC}=6.0V;$ $V_O=V_{CC} \text{ or } GND$ | - | - | ± 1.0 | μA | |
| supply current | I_{CC} | $V_I=V_{CC} \text{ or } GND; I_O=0A; V_{CC}=6.0V$ | - | - | 8.0 | μA | |
| input capacitance | C_I | - | - | 3.5 | - | pF | |
| AiP74HCT541 | | | | | | | |
| HIGH-level input voltage | V_{IH} | $V_{CC}=4.5V \text{ to } 5.5V$ | 2.0 | 1.6 | - | V | |
| LOW-level input voltage | V_{IL} | $V_{CC}=4.5V \text{ to } 5.5V$ | - | 1.2 | 0.8 | V | |
| HIGH-level output voltage | V_{OH} | $V_I = V_{IH} \text{ or } V_{IL};$ $V_{CC}=4.5V$ | $I_O=-20\mu A$ | 4.4 | 4.5 | - | V |
| | | | $I_O=-6.0mA$ | 3.98 | 4.32 | - | V |
| LOW-level output voltage | V_{OL} | $V_I = V_{IH} \text{ or } V_{IL};$ $V_{CC}=4.5V$ | $I_O=20\mu A$ | - | 0 | 0.1 | V |
| | | | $I_O=6.0mA$ | - | 0.16 | 0.26 | V |
| input leakage current | I_I | $V_I=V_{CC} \text{ or } GND;$ $V_{CC}=5.5V$ | - | - | ± 1.0 | μA | |
| OFF-state output current | I_{OZ} | $V_I=V_{IH} \text{ or } V_{IL}; V_{CC}=5.5V;$ $V_O=V_{CC} \text{ or } GND$ | - | - | ± 1.0 | μA | |
| supply current | I_{CC} | $V_I=V_{CC} \text{ or } GND; I_O=0A; V_{CC}=5.5V$ | - | - | 8.0 | μA | |
| additional supply current | ΔI_{CC} | per input pin; $V_I=V_{CC}-2.1V;$ other inputs at V_{CC} or GND; $V_{CC}=4.5V$ to $5.5V; I_O=0A$ | An input | - | - | 252 | μA |
| | | | $\overline{OE}1$ input | - | - | 540 | μA |
| | | | $\overline{OE}2$ input | - | - | 360 | μA |
| input | C_I | - | - | 3.5 | - | pF | |



| | | | | | |
|-------------|--|--|--|--|--|
| capacitance | | | | | |
|-------------|--|--|--|--|--|

3.3.2、DC Characteristics 2

($T_{amb}=-40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$, voltages are referenced to GND (ground=0V), unless otherwise specified.)

| Parameter | Symbol | Conditions | Min. | Typ. | Max. | Unit | |
|---------------------------|-----------------|--|--|------|-----------|---------------|---------------|
| AiP74HC541 | | | | | | | |
| HIGH-level input voltage | V_{IH} | $V_{CC}=2.0\text{V}$ | 1.5 | - | - | V | |
| | | $V_{CC}=4.5\text{V}$ | 3.15 | - | - | V | |
| | | $V_{CC}=6.0\text{V}$ | 4.2 | - | - | V | |
| LOW-level input voltage | V_{IL} | $V_{CC}=2.0\text{V}$ | - | - | 0.5 | V | |
| | | $V_{CC}=4.5\text{V}$ | - | - | 1.35 | V | |
| | | $V_{CC}=6.0\text{V}$ | - | - | 1.8 | V | |
| HIGH-level output voltage | V_{OH} | $V_I = V_{IH}$ or V_{IL} | $I_O=-20\mu\text{A}; V_{CC}=2.0\text{V}$ | 1.9 | - | - | V |
| | | | $I_O=-20\mu\text{A}; V_{CC}=4.5\text{V}$ | 4.4 | - | - | V |
| | | | $I_O=-20\mu\text{A}; V_{CC}=6.0\text{V}$ | 5.9 | - | - | V |
| | | | $I_O=-6.0\text{mA}; V_{CC}=4.5\text{V}$ | 3.84 | - | - | V |
| | | | $I_O=-7.8\text{mA}; V_{CC}=6.0\text{V}$ | 5.34 | - | - | V |
| LOW-level output voltage | V_{OL} | $V_I = V_{IH}$ or V_{IL} | $I_O=20\mu\text{A}; V_{CC}=2.0\text{V}$ | - | - | 0.1 | V |
| | | | $I_O=20\mu\text{A}; V_{CC}=4.5\text{V}$ | - | - | 0.1 | V |
| | | | $I_O=20\mu\text{A}; V_{CC}=6.0\text{V}$ | - | - | 0.1 | V |
| | | | $I_O=6.0\text{mA}; V_{CC}=4.5\text{V}$ | - | - | 0.33 | V |
| | | | $I_O=7.8\text{mA}; V_{CC}=6.0\text{V}$ | - | - | 0.33 | V |
| input leakage current | I_I | $V_I=V_{CC}$ or GND; $V_{CC}=6.0\text{V}$ | - | - | ± 1.0 | μA | |
| OFF-state output current | I_{OZ} | $V_I=V_{IH}$ or $V_{IL}; V_{CC}=6.0\text{V};$ $V_O=V_{CC}$ or GND | - | - | ± 5.0 | μA | |
| supply current | I_{CC} | $V_I=V_{CC}$ or GND; $I_O=0\text{A}; V_{CC}=6.0\text{V}$ | - | - | 80 | μA | |
| AiP74HCT541 | | | | | | | |
| HIGH-level input voltage | V_{IH} | $V_{CC}=4.5\text{V}$ to 5.5V | 2.0 | - | - | V | |
| LOW-level input voltage | V_{IL} | $V_{CC}=4.5\text{V}$ to 5.5V | - | - | 0.8 | V | |
| HIGH-level output voltage | V_{OH} | $V_I = V_{IH}$ or $V_{IL};$ $V_{CC}=4.5\text{V}$ | $I_O=-20\mu\text{A}$ | 4.4 | - | - | V |
| | | | $I_O=-6.0\text{mA}$ | 3.84 | - | - | V |
| LOW-level output voltage | V_{OL} | $V_I = V_{IH}$ or $V_{IL};$ $V_{CC}=4.5\text{V}$ | $I_O=20\mu\text{A}$ | - | - | 0.1 | V |
| | | | $I_O=6.0\text{mA}$ | - | - | 0.33 | V |
| input leakage current | I_I | $V_I=V_{CC}$ or GND; $V_{CC}=5.5\text{V}$ | - | - | ± 1.0 | μA | |
| OFF-state output current | I_{OZ} | $V_I=V_{IH}$ or $V_{IL}; V_{CC}=5.5\text{V};$ $V_O=V_{CC}$ or GND | - | - | ± 5.0 | μA | |
| supply current | I_{CC} | $V_I=V_{CC}$ or GND; $I_O=0\text{A}; V_{CC}=5.5\text{V}$ | - | - | 80 | μA | |
| additional supply current | ΔI_{CC} | per input pin; $V_I=V_{CC}-2.1\text{V};$ other inputs at V_{CC} or GND; $V_{CC}=4.5\text{V}$ to $5.5\text{V}; I_O=0\text{A}$ | An input | - | - | 315 | μA |
| | | | $\overline{\text{OE}}1$ input | - | - | 675 | μA |
| | | | $\overline{\text{OE}}2$ input | - | - | 450 | μA |



3.3.3、DC Characteristics 3

($T_{amb} = -40^{\circ}\text{C}$ to $+125^{\circ}\text{C}$, voltages are referenced to GND (ground=0V), unless otherwise specified.)

| Parameter | Symbol | Conditions | Min. | Typ. | Max. | Unit | |
|---------------------------|-----------------|---|--|------|-----------|---------------|---------------|
| AiP74HC541 | | | | | | | |
| HIGH-level input voltage | V_{IH} | $V_{CC}=2.0\text{V}$ | 1.5 | - | - | V | |
| | | $V_{CC}=4.5\text{V}$ | 3.15 | - | - | V | |
| | | $V_{CC}=6.0\text{V}$ | 4.2 | - | - | V | |
| LOW-level input voltage | V_{IL} | $V_{CC}=2.0\text{V}$ | - | - | 0.5 | V | |
| | | $V_{CC}=4.5\text{V}$ | - | - | 1.35 | V | |
| | | $V_{CC}=6.0\text{V}$ | - | - | 1.8 | V | |
| HIGH-level output voltage | V_{OH} | $V_I = V_{IH} \text{ or } V_{IL}$ | $I_O = -20\mu\text{A}; V_{CC} = 2.0\text{V}$ | 1.9 | - | - | V |
| | | | $I_O = -20\mu\text{A}; V_{CC} = 4.5\text{V}$ | 4.4 | - | - | V |
| | | | $I_O = -20\mu\text{A}; V_{CC} = 6.0\text{V}$ | 5.9 | - | - | V |
| | | | $I_O = -6.0\text{mA}; V_{CC} = 4.5\text{V}$ | 3.7 | - | - | V |
| | | | $I_O = -7.8\text{mA}; V_{CC} = 6.0\text{V}$ | 5.2 | - | - | V |
| LOW-level output voltage | V_{OL} | $V_I = V_{IH} \text{ or } V_{IL}$ | $I_O = 20\mu\text{A}; V_{CC} = 2.0\text{V}$ | - | - | 0.1 | V |
| | | | $I_O = 20\mu\text{A}; V_{CC} = 4.5\text{V}$ | - | - | 0.1 | V |
| | | | $I_O = 20\mu\text{A}; V_{CC} = 6.0\text{V}$ | - | - | 0.1 | V |
| | | | $I_O = 6.0\text{mA}; V_{CC} = 4.5\text{V}$ | - | - | 0.4 | V |
| | | | $I_O = 7.8\text{mA}; V_{CC} = 6.0\text{V}$ | - | - | 0.4 | V |
| input leakage current | I_I | $V_I = V_{CC} \text{ or } \text{GND}; V_{CC} = 6.0\text{V}$ | - | - | ± 1.0 | μA | |
| OFF-state output current | I_{OZ} | $V_I = V_{IH} \text{ or } V_{IL}; V_{CC} = 6.0\text{V}; V_O = V_{CC} \text{ or } \text{GND}$ | - | - | ± 10 | μA | |
| supply current | I_{CC} | $V_I = V_{CC} \text{ or } \text{GND}; I_O = 0\text{A}; V_{CC} = 6.0\text{V}$ | - | - | 160 | μA | |
| AiP74HCT541 | | | | | | | |
| HIGH-level input voltage | V_{IH} | $V_{CC} = 4.5\text{V to } 5.5\text{V}$ | 2.0 | - | - | V | |
| LOW-level input voltage | V_{IL} | $V_{CC} = 4.5\text{V to } 5.5\text{V}$ | - | - | 0.8 | V | |
| HIGH-level output voltage | V_{OH} | $V_I = V_{IH} \text{ or } V_{IL}; V_{CC} = 4.5\text{V}$ | $I_O = -20\mu\text{A}$ | 4.4 | - | - | V |
| | | | $I_O = -6.0\text{mA}$ | 3.7 | - | - | V |
| LOW-level output voltage | V_{OL} | $V_I = V_{IH} \text{ or } V_{IL}; V_{CC} = 4.5\text{V}$ | $I_O = 20\mu\text{A}$ | - | - | 0.1 | V |
| | | | $I_O = 6.0\text{mA}$ | - | - | 0.4 | V |
| input leakage current | I_I | $V_I = V_{CC} \text{ or } \text{GND}; V_{CC} = 5.5\text{V}$ | - | - | ± 1.0 | μA | |
| OFF-state output current | I_{OZ} | $V_I = V_{IH} \text{ or } V_{IL}; V_{CC} = 5.5\text{V}; V_O = V_{CC} \text{ or } \text{GND}$ | - | - | ± 10 | μA | |
| supply current | I_{CC} | $V_I = V_{CC} \text{ or } \text{GND}; I_O = 0\text{A}; V_{CC} = 5.5\text{V}$ | - | - | 160 | μA | |
| additional supply current | ΔI_{CC} | per input pin; $V_I = V_{CC} - 2.1\text{V};$ other inputs at V_{CC} or GND; $V_{CC} = 4.5\text{V to } 5.5\text{V}; I_O = 0\text{A}$ | An input | - | - | 343 | μA |
| | | | $\overline{\text{OE1}}$ input | - | - | 735 | μA |
| | | | $\overline{\text{OE2}}$ input | - | - | 490 | μA |



3.3.4、AC Characteristics 1

($T_{amb}=25^{\circ}C$, $GND=0V$, $C_L=50pF$, unless otherwise specified.)

| Parameter | Symbol | Conditions | Min. | Typ. | Max. | Unit | |
|-------------------------------------|-----------|--|-------------------------|------|------|------|----|
| AiP74HC541 | | | | | | | |
| An to Yn propagation delay | t_{pd} | see Figure 6 | $V_{CC}=2.0V$ | - | 33 | 115 | ns |
| | | | $V_{CC}=4.5V$ | - | 12 | 23 | ns |
| | | | $V_{CC}=5.0V; C_L=15pF$ | - | 10 | - | ns |
| | | | $V_{CC}=6.0V$ | - | 10 | 20 | ns |
| $\overline{O}En$ to Yn enable time | t_{en} | see Figure 7 | $V_{CC}=2.0V$ | - | 55 | 160 | ns |
| | | | $V_{CC}=4.5V$ | - | 20 | 32 | ns |
| | | | $V_{CC}=6.0V$ | - | 16 | 27 | ns |
| $\overline{O}En$ to Yn disable time | t_{dis} | see Figure 7 | $V_{CC}=2.0V$ | - | 61 | 160 | ns |
| | | | $V_{CC}=4.5V$ | - | 22 | 32 | ns |
| | | | $V_{CC}=6.0V$ | - | 18 | 27 | ns |
| transition time | t_t | see Figure 6 | $V_{CC}=2.0V$ | - | 14 | 60 | ns |
| | | | $V_{CC}=4.5V$ | - | 5 | 12 | ns |
| | | | $V_{CC}=6.0V$ | - | 4 | 10 | ns |
| power dissipation capacitance | C_{PD} | per buffer; $V_I=GND$ to V_{CC} | - | 37 | - | pF | |
| AiP74HCT541 | | | | | | | |
| An to Yn propagation delay | t_{pd} | see Figure 6 | $V_{CC}=4.5V$ | - | 15 | 28 | ns |
| | | | $V_{CC}=5.0V; C_L=15pF$ | - | 12 | - | ns |
| $\overline{O}En$ to Yn enable time | t_{en} | $V_{CC}=4.5V$; see Figure 7 | - | 21 | 35 | ns | |
| $\overline{O}En$ to Yn disable time | t_{dis} | $V_{CC}=4.5V$; see Figure 7 | - | 21 | 35 | ns | |
| transition time | t_t | $V_{CC}=4.5V$; see Figure 6 | - | 5 | 12 | ns | |
| power dissipation capacitance | C_{PD} | per buffer; $V_I=GND$ to $V_{CC}-1.5V$ | - | 39 | - | pF | |

Note:

- [1] t_{pd} is the same as t_{PLH} and t_{PHL} .
- [2] t_{en} is the same as t_{PZL} and t_{PZH} .
- [3] t_{dis} is the same as t_{PLZ} and t_{PHZ} .
- [4] t_t is the same as t_{THL} and t_{TLH} .
- [5] C_{PD} is used to determine the dynamic power dissipation (P_D in uW).

$$P_D = C_{PD} \times V_{CC}^2 \times f_i \times N + \sum (C_L \times V_{CC}^2 \times f_o)$$

where:

f_i =input frequency in MHz;

f_o =output frequency in MHz;

C_L =output load capacitance in pF;

V_{CC} =supply voltage in V;

N =number of inputs switching;

$\sum (C_L \times V_{CC}^2 \times f_o)$ =sum of outputs.



3.3.5、AC Characteristics 2

($T_{amb}=-40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$, $\text{GND}=0\text{V}$, $C_L=50\text{pF}$, unless otherwise specified.)

| Parameter | Symbol | Conditions | Min. | Typ. | Max. | Unit | |
|--|-----------|-------------------------------------|----------------------|------|------|------|----|
| AiP74HC541 | | | | | | | |
| An to Yn propagation delay | t_{pd} | see Figure 6 | $V_{CC}=2.0\text{V}$ | - | - | 145 | ns |
| | | | $V_{CC}=4.5\text{V}$ | - | - | 29 | ns |
| | | | $V_{CC}=6.0\text{V}$ | - | - | 25 | ns |
| $\overline{\text{OEn}}$ to Yn enable time | t_{en} | see Figure 7 | $V_{CC}=2.0\text{V}$ | - | - | 200 | ns |
| | | | $V_{CC}=4.5\text{V}$ | - | - | 40 | ns |
| | | | $V_{CC}=6.0\text{V}$ | - | - | 34 | ns |
| $\overline{\text{OEn}}$ to Yn disable time | t_{dis} | see Figure 7 | $V_{CC}=2.0\text{V}$ | - | - | 200 | ns |
| | | | $V_{CC}=4.5\text{V}$ | - | - | 40 | ns |
| | | | $V_{CC}=6.0\text{V}$ | - | - | 34 | ns |
| transition time | t_t | see Figure 6 | $V_{CC}=2.0\text{V}$ | - | - | 75 | ns |
| | | | $V_{CC}=4.5\text{V}$ | - | - | 15 | ns |
| | | | $V_{CC}=6.0\text{V}$ | - | - | 13 | ns |
| AiP74HCT541 | | | | | | | |
| An to Yn propagation delay | t_{pd} | see Figure 6 | $V_{CC}=4.5\text{V}$ | - | - | 35 | ns |
| $\overline{\text{OEn}}$ to Yn enable time | t_{en} | $V_{CC}=4.5\text{V}$; see Figure 7 | | - | - | 44 | ns |
| $\overline{\text{OEn}}$ to Yn disable time | t_{dis} | $V_{CC}=4.5\text{V}$; see Figure 7 | | - | - | 44 | ns |
| transition time | t_t | $V_{CC}=4.5\text{V}$; see Figure 6 | | - | - | 15 | ns |

Note:

[1] t_{pd} is the same as t_{PLH} and t_{PHL} .

[2] t_{en} is the same as t_{PZL} and t_{PZH} .

[3] t_{dis} is the same as t_{PLZ} and t_{PHZ} .

[4] t_t is the same as t_{THL} and t_{TLH} .



3.3.6、AC Characteristics 3

($T_{amb} = -40^{\circ}\text{C}$ to $+125^{\circ}\text{C}$, $GND = 0\text{V}$, $C_L = 50\text{pF}$, unless otherwise specified.)

| Parameter | Symbol | Conditions | Min. | Typ. | Max. | Unit | |
|--|-----------|---------------------------------------|------------------------|------|------|------|----|
| AiP74HC541 | | | | | | | |
| An to Yn propagation delay | t_{pd} | see Figure 6 | $V_{CC} = 2.0\text{V}$ | - | - | 175 | ns |
| | | | $V_{CC} = 4.5\text{V}$ | - | - | 35 | ns |
| | | | $V_{CC} = 6.0\text{V}$ | - | - | 30 | ns |
| $\overline{\text{OEn}}$ to Yn enable time | t_{en} | see Figure 7 | $V_{CC} = 2.0\text{V}$ | - | - | 240 | ns |
| | | | $V_{CC} = 4.5\text{V}$ | - | - | 48 | ns |
| | | | $V_{CC} = 6.0\text{V}$ | - | - | 41 | ns |
| $\overline{\text{OEn}}$ to Yn disable time | t_{dis} | see Figure 7 | $V_{CC} = 2.0\text{V}$ | - | - | 240 | ns |
| | | | $V_{CC} = 4.5\text{V}$ | - | - | 48 | ns |
| | | | $V_{CC} = 6.0\text{V}$ | - | - | 41 | ns |
| transition time | t_t | see Figure 6 | $V_{CC} = 2.0\text{V}$ | - | - | 90 | ns |
| | | | $V_{CC} = 4.5\text{V}$ | - | - | 18 | ns |
| | | | $V_{CC} = 6.0\text{V}$ | - | - | 15 | ns |
| AiP74HCT541 | | | | | | | |
| An to Yn propagation delay | t_{pd} | see Figure 6 | $V_{CC} = 4.5\text{V}$ | - | - | 42 | ns |
| $\overline{\text{OEn}}$ to Yn enable time | t_{en} | $V_{CC} = 4.5\text{V}$; see Figure 7 | | - | - | 53 | ns |
| $\overline{\text{OEn}}$ to Yn disable time | t_{dis} | $V_{CC} = 4.5\text{V}$; see Figure 7 | | - | - | 53 | ns |
| transition time | t_t | $V_{CC} = 4.5\text{V}$; see Figure 6 | | - | - | 18 | ns |

Note:

[1] t_{pd} is the same as t_{PLH} and t_{PHL} .

[2] t_{en} is the same as t_{PZL} and t_{PZH} .

[3] t_{dis} is the same as t_{PLZ} and t_{PHZ} .

[4] t_t is the same as t_{THL} and t_{TLH} .



4、 Testing Circuit

4.1、 AC Testing Circuit

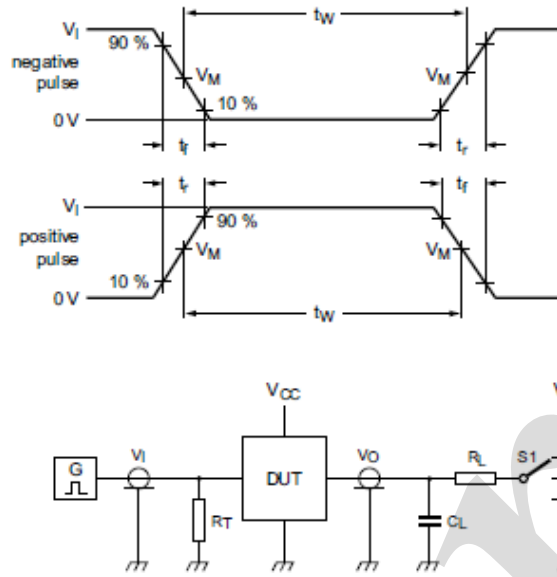


Figure 5. Test circuit for measuring switching times

Definitions for test circuit:

R_L =Load resistance.

C_L =Load capacitance including jig and probe capacitance.

R_T =Termination resistance should be equal to the output impedance Z_o of the pulse generator.

S1=Test selection switch.

4.2、 AC Testing Waveforms

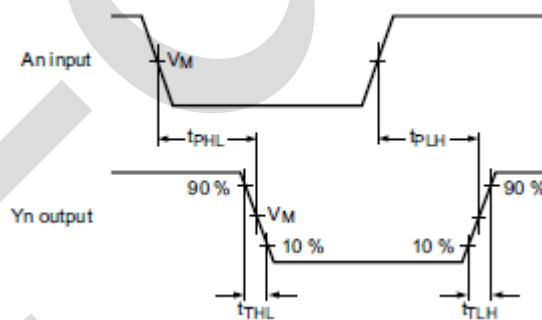


Figure 6. Input to output propagation delays

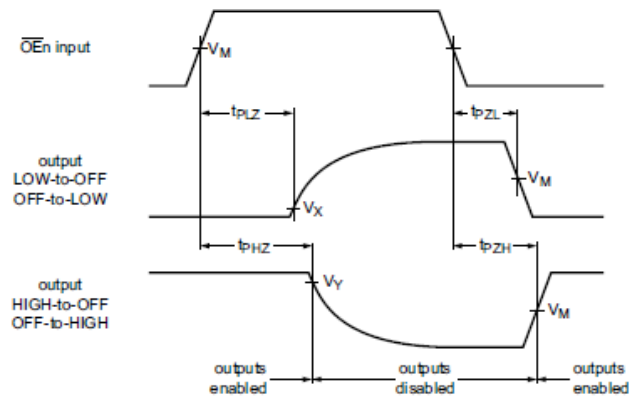


Figure 7. 3-state enable and disable times

4.3. Measurement Points

| Type | Input | | Output | |
|-------------|---------------------|---------------------|---------------------|---------------------|
| | V_M | V_M | V_X | V_Y |
| AiP74HC541 | $0.5 \times V_{CC}$ | $0.5 \times V_{CC}$ | $0.1 \times V_{CC}$ | $0.9 \times V_{CC}$ |
| AiP74HCT541 | 1.3V | 1.3V | $0.1 \times V_{CC}$ | $0.9 \times V_{CC}$ |


4.4. Test Data

| Type | Input | | Load | | S1 position | | |
|-------------|----------|------------|------------|-------------|--------------------|--------------------|--------------------|
| | V_I | t_r, t_f | C_L | R_L | t_{PHL}, t_{PLH} | t_{PZH}, t_{PHZ} | t_{PZL}, t_{PLZ} |
| AiP74HC541 | V_{CC} | 6ns | 15pF, 50pF | 1k Ω | open | GND | V_{CC} |
| AiP74HCT541 | 3V | 6ns | 15pF, 50pF | 1k Ω | open | GND | V_{CC} |



5、Package Information


5.1、DIP20

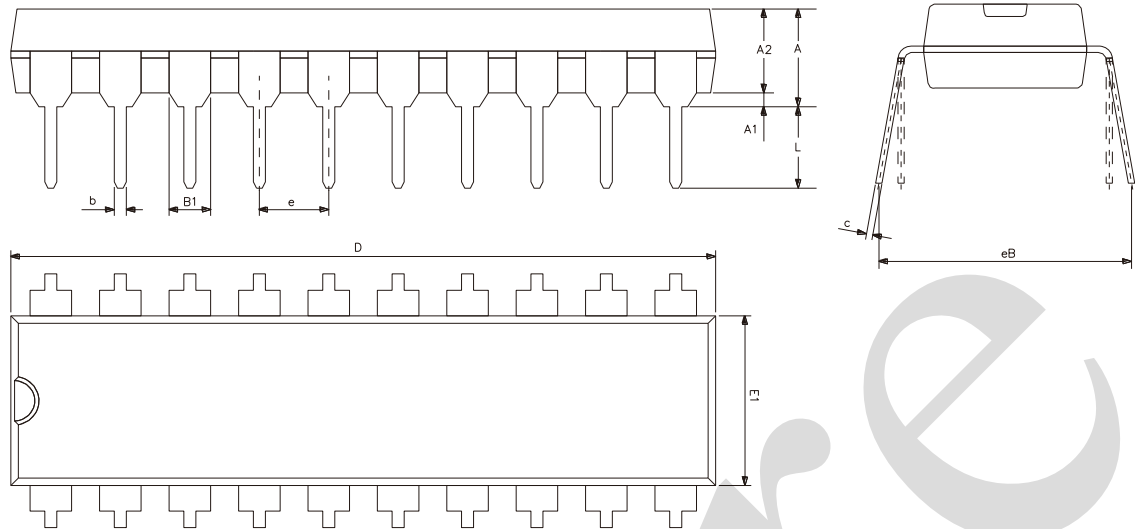

| Symbol | Dimensions (mm) | |
|--------|-----------------|-------|
| | Min. | Max. |
| A | 3.60 | 5.33 |
| A1 | 0.51 | - |
| A2 | 3.20 | 3.60 |
| b | 0.36 | 0.53 |
| B1 | 1.52 | |
| c | 0.204 | 0.36 |
| D | 25.70 | 26.54 |
| E1 | 6.20 | 6.75 |
| e | 2.54 | |
| eB | 7.62 | 9.30 |
| L | 3.00 | 3.60 |






5.2、SOP20

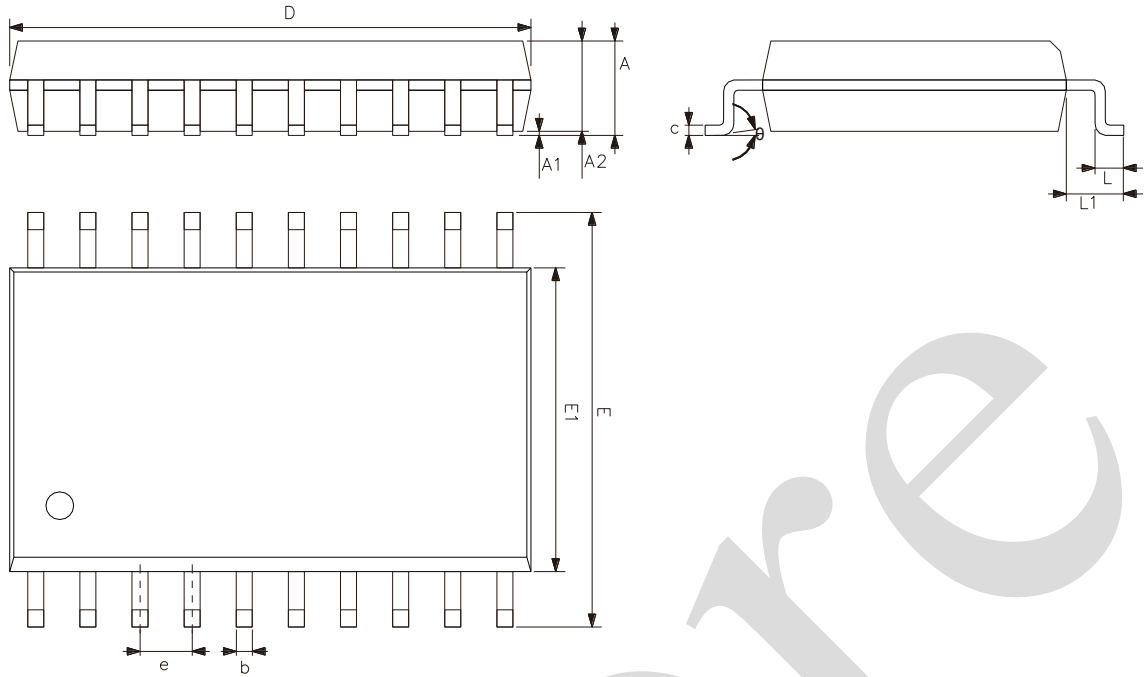

| Symbol | Dimensions (mm) | |
|--------|-----------------|-------|
| | Min. | Max. |
| A | 2.47 | 2.65 |
| A1 | 0.05 | 0.30 |
| A2 | 2.20 | 2.44 |
| b | 0.35 | 0.50 |
| c | 0.15 | 0.30 |
| D | 12.54 | 12.94 |
| E | 10.00 | 10.60 |
| E1 | 7.30 | 7.70 |
| e | 1.27 | |
| L | 0.40 | 1.05 |
| L1 | 1.30 | 1.50 |
| θ | 0° | 8° |



5.3、TSSOP20

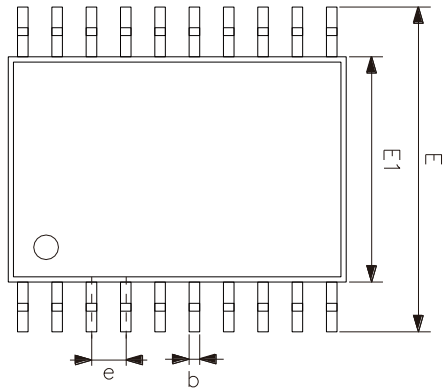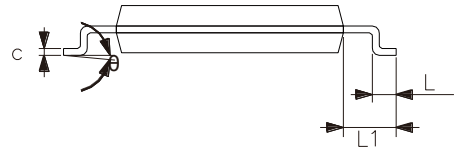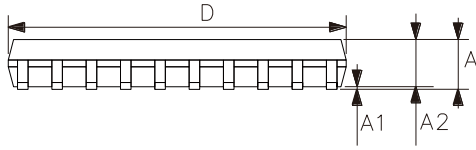

| Symbol | Dimensions (mm) | |
|----------|-----------------|------|
| | Min. | Max. |
| A | - | 1.20 |
| A1 | 0.05 | 0.15 |
| A2 | 0.80 | 1.05 |
| b | 0.19 | 0.30 |
| c | 0.09 | 0.20 |
| D | 6.40 | 6.60 |
| E1 | 4.30 | 4.50 |
| E | 6.20 | 6.60 |
| e | 0.65 | |
| L | 0.45 | 0.75 |
| L1 | 1.00 | |
| θ | 0° | 8° |



6、 Statements And Notes

6.1、 The name and content of Hazardous substances or Elements in the product

| Part name | Hazardous substances or Elements | | | | | | | | | |
|-------------------------|---|-------------------------------|-------------------------------|-------------------------------|--------------------------|--------------------------------|-------------------|-----------------------|---------------------------|----------------------|
| | Lead and lead compounds | Mercury and mercury compounds | Cadmium and cadmium compounds | Hexavalent chromium compounds | Polybrominated biphenyls | Polybrominated biphenyl ethers | Dibutyl phthalate | Butylbenzyl phthalate | Di-2-ethylhexyl phthalate | Diisobutyl phthalate |
| Lead frame | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| Plastic resin | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| Chip | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| The lead | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| Plastic sheet installed | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| explanation | ○: Indicates that the content of hazardous substances or elements in the detection limit of the following the SJ/T11363-2006 standard. ×: Indicates that the content of hazardous substances or elements exceeding the SJ/T11363-2006 Standard limit requirements. | | | | | | | | | |

6.2、 Notes

We Recommend you to read this chapter carefully before using this product.

The information in this chapter is provided for reference only and i-Core disclaims any express or implied warranties, including but not limited to applicability, special application or non-infringement of third party rights.

This product is not suitable for critical equipment such as life-saving, life-sustaining or safety equipment. It is also not suitable for applications that may result in personal injury, death, or serious property or environmental damage due to product malfunction or failure. I-Core will not be liable for any damages incurred by the customers at their own risk for such applications.

The customer is responsible for conducting all necessary tests i-Core's application to avoid failure in the application or the application of the customer's third party users. I-Core does not accept any liability.

The Company reserves the right to change or improve the information published in this chapter at any time.

The information in this chapter are subject to change without notice. We recommend the customer to consult our sales staff before purchasing.

Please obtain related materials form i-Core's regular channels and we are not responsible for its content if it is provided by sources other than our company.

In case of any conflict between the Chinese and English version, the version is subject to the Chinese one.