



DESCRIPTION

The A7801A is a low noise, constant frequency (300kHz) switched capacitor voltage doubler. It produce a regulated output voltage from a 2.5V to 5.0V input with up to 300mA of output current. Low external parts count (one flying capacitor and two small bypass capacitors at V_{IN} and V_{OUT}) make the A7801A ideally suited for small, battery-powered applications.

A new charge-pump architecture maintains constant switching frequency to zero load and reduces both output and input ripple. The A7801A have thermal shutdown capability and can survive a continuous short circuit from V_{OUT} to GND. Built-in soft-start circuitry prevents excessive inrush current during start-up.

High switching frequency enables the use of small ceramic capacitors. A low current shutdown feature disconnects the load from V_{IN} and reduces quiescent current to $<1\mu A$.

The A7801A is available in SOT-26 package.

ORDERING INFORMATION

Package Type	Part Number	
SOT-26	E6	A7801AE6R
SPQ: 3,000pcs/Reel		A7801AE6VR
Note	V: Halogen free Package R: Tape & Reel	
AiT provides all RoHS products		

FEATURES

- Fixed 5V $\pm 2.5\%$ Output
- V_{IN} Range: 2.5V to 5.0V
- Output Current: Up to 300mA
- Constant Frequency Operation at All Loads
- Low Noise Constant Frequency (300kHz) Operation
- Automatic Soft-Start Reduces Inrush Current
- Shutdown Current $<1\mu A$
- Short-Circuit Protection
- No Inductors
- Available in SOT-26 package

APPLICATION

- White LED Backlighting
- Li-Ion Battery Backup Supplies
- Local 3V to 5V Conversion
- Smart Card Readers
- PCMCIA Local 5V Supplies

TYPICAL APPLICATION


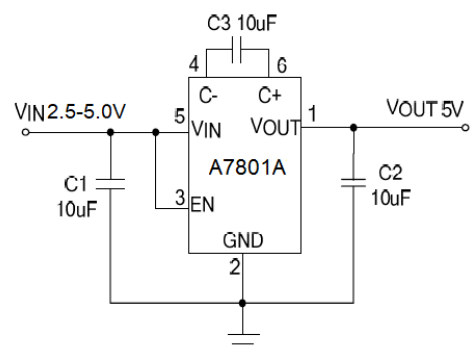


Figure 1. Basic Application Circuit with A7801A



PIN DESCRIPTION



Top View

Pin #	Symbol	Function
1	V _{OUT}	Regulated Output Voltage. V _{OUT} should be bypassed with a low ESR ceramic capacitor providing at least 2.2uF of capacitance as close to the pin as possible for best performance.
2	GND	Ground Pin.
3	EN	Active Low Shutdown Input. This pin must not be allowed to float.
4	C-	Flying Capacitor Negative Terminal.
5	V _{IN}	Input Supply Voltage. V _{IN} should be bypassed with a low ESR ceramic capacitor providing at least 2.2uF of capacitance as close to the pin as possible for best performance.
6	C+	Flying Capacitor Positive Terminal.



ABSOLUTE MAXIMUM RATINGS

V_{IN}	-0.3V~+6V
V_{OUT}	-0.3V~5.5V
V_{EN}	-0.3V~+6V
I_{OUT} NOTE1	350mA
P_D , Power Dissipation	SOT-26 300mW
Operating Temperature Range NOTE2	-20°C~85°C
Lead Temperature (Soldering 10 sec.)	300°C
Storage Temperature Range	-65°C~125°C

Stress beyond above listed "Absolute Maximum Ratings" may lead permanent damage to the device. These are stress ratings only and operations of the device at these or any other conditions beyond those indicated in the operational sections of the specifications are not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

NOTE 1: Based on long term current density limitations.

NOTE 2: The A7801A are guaranteed to meet performance specifications from 0°C to 70°C Specifications over the -20°C to 85 operating temperature range are assured by design, characterization and correlation with statistical process controls.


ELECTRICAL CHARACTERISTICS

EN= V_{IN} , $C_{IN}=C_{OUT}=10\mu F$, $T_A = 25^\circ C$, Test Circuit of Figure 1, unless otherwise noted.

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Input Voltage Range	V_{IN}		2.5	-	5.0	V
Output Voltage Range	V_{OUT}	$V_{IN} > 3.0V$, $I_{OUT} < 40mA$	4.875	5.0	5.125	V
Shutdown Current	I_{SHDN}	EN=0V, $I_{LOAD}=0mA$	-	-	1	μA
Line Regulation	V_{LINE}	$3.1 < V_{IN} < 4.5$, $I_{LOAD} = 50mA$	-	10	-	mV
Output Current Limit	I_{LIMIT}		-	300	-	mA
Output Ripple	V_R	$V_{IN} = 3.6V$, $I_{OUT} = 100mA$	-	50	-	mVP-P
Efficiency	η	$V_{IN} = 3.6V$, $I_{OUT} = 50mA$	-	68	-	%
Switching Frequency	f_{OSC}		-	300	-	kHz




BLOCK DIAGRAM

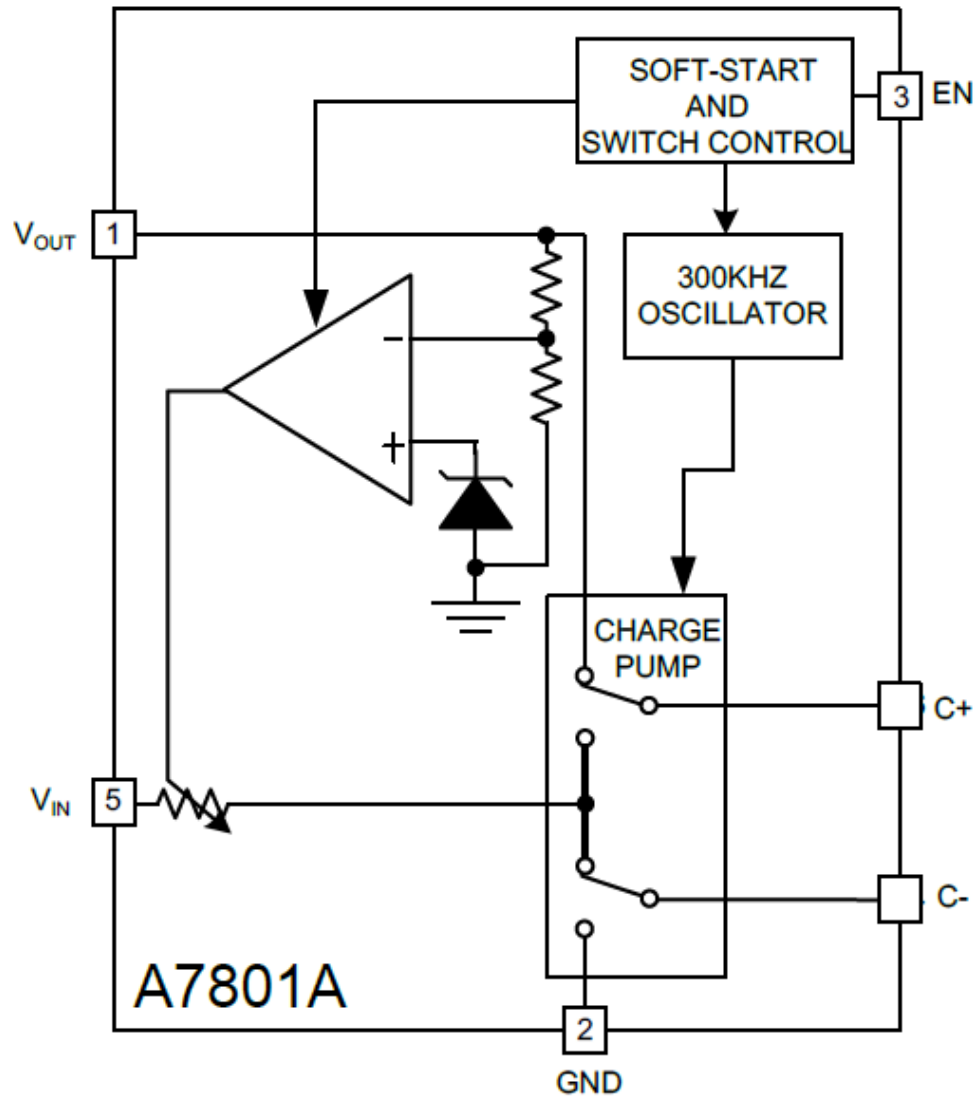



PACKAGE INFORMATION

Dimension in SOT-26 (Unit: mm)

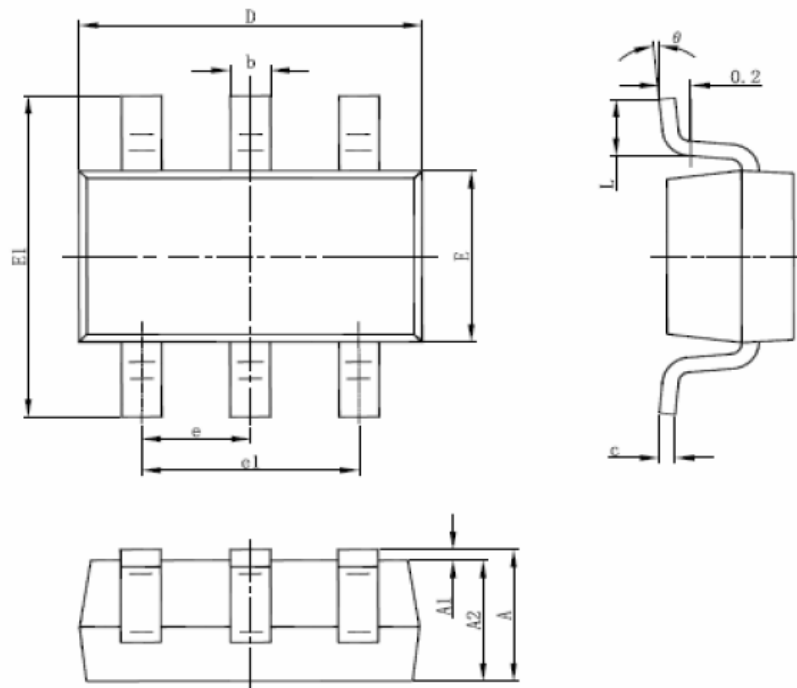

Symbol	Min	Max
A	1.050	1.250
A1	0.000	0.100
A2	1.050	1.150
b	0.300	0.500
c	0.100	0.200
D	2.820	3.020
E	1.500	1.700
E1	2.650	2.950
e	0.950 BSC	
e1	1.800	2.000
L	0.300	0.600
θ	0°	8°



IMPORTANT NOTICE

AiT Semiconductor Inc. (AiT) reserves the right to make changes to any its product, specifications, to discontinue any integrated circuit product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied on is current.

AiT Semiconductor Inc.'s integrated circuit products are not designed, intended, authorized, or warranted to be suitable for use in life support applications, devices or systems or other critical applications. Use of AiT products in such applications is understood to be fully at the risk of the customer. As used herein may involve potential risks of death, personal injury, or severe property, or environmental damage. In order to minimize risks associated with the customer's applications, the customer should provide adequate design and operating safeguards.

AiT Semiconductor Inc. assumes to no liability to customer product design or application support. AiT warrants the performance of its products of the specifications applicable at the time of sale.