

**DESCRIPTION**


The MMBT2222AL is available in SOT-23 package.

FEATURES

- Epitaxial planar die construction
- Complementary PNP Type available (MMBT2907A)
- Available in SOT-23 package

ORDERING INFORMATION

Package Type	Part Number
SOT-23	MMBT2222AL
Note	SPQ: 3,000pcs/Reel
AiT provides all RoHS Compliant Products	

PIN DESCRIPTION

PIN#	DESCRIPTION
B	BASE
E	EMITTER
C	COLLECTOR

ABSOLUTE MAXIMUM RATINGS

T_A=25°C, unless otherwise noted

V _{CBO} , Collector-Base Voltage	75V
V _{CEO} , Collector-Emitter Voltage	40V
V _{EBO} , Emitter-Base Voltage	6V
I _C , Collector Current -Continuous	600mA
P _C , Collector Dissipation	250mW
R _{θJA} , Thermal Resistance, Junction to Ambient	500°C/W
T _J , Junction Temperature	150°C
T _{STG} , Storage Temperature	-55 ~ +150°C

Stresses above may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated in the Electrical Characteristics are not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.



ELECTRICAL CHARACTERISTICS

T_A=25°C, unless otherwise specified

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Collector-Base Breakdown Voltage	V _{(BR)CBO}	I _C = 10μA, I _E =0	75	-	-	V
Collector-Emitter Breakdown Voltage	V _{(BR)CEO*}	I _C = 10mA, I _B =0	40	-	-	V
Emitter-Base Breakdown Voltage	V _{(BR)EBO}	I _E =10μA, I _C =0	6	-	-	V
Collector Cut-Off Current	I _{CBO}	V _{CB} =60V, I _E =0	-	-	0.01	μA
Collector Cut-Off Current	I _{CEX}	V _{CE} =30V, V _{BE (off)} =3V	-	-	0.01	μA
Emitter Cut-Off Current	I _{EBO}	V _{EB} = 3V, I _C =0	-	-	0.1	μA
DC Current Gain	h _{FE} *	V _{CE} =10V, I _C = 150mA	100	-	300	-
	h _{FE}	V _{CE} =10V, I _C = 0.1mA	35	-	-	
	h _{FE} *	V _{CE} =10V, I _C = 500mA	40	-	-	
Collector-Emitter Saturation Voltage	V _{CE (sat)*}	I _C =500 mA, I _B = 50mA	-	-	1.0	V
		I _C =150mA, I _B =15mA	-	-	0.3	
Base-Emitter Saturation Voltage	V _{BE (sat)*}	I _C =500 mA, I _B = 50mA	-	-	2.0	V
		I _C =150mA, I _B =15mA	-	-	1.2	
Transition Frequency	f _T	V _{CE} =20V, I _C = 20mA, f=100MHz	300	-	-	MHz
Delay Time	t _d	V _{CC} =30V, V _{BE (off)} =-0.5V I _C =150mA, I _{B1} = 15mA	-	-	10	ns
Rise Time	t _r		-	-	25	
Storage Time	t _s	V _{CC} =30V, I _C =150mA I _{B1} =-I _{B2} =15mA	-	-	225	ns
Fall Time	t _f		-	-	60	

*pulse test: Pulse Width ≤300μs, Duty Cycles ≤ 2.0%.



TYPICAL CHARACTERISTICS

Figure 1. $P_D - T_A$

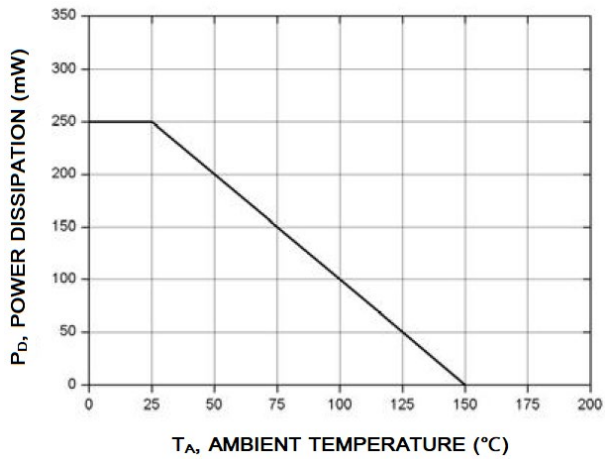


Figure 2. $V_{CES} - I_C$


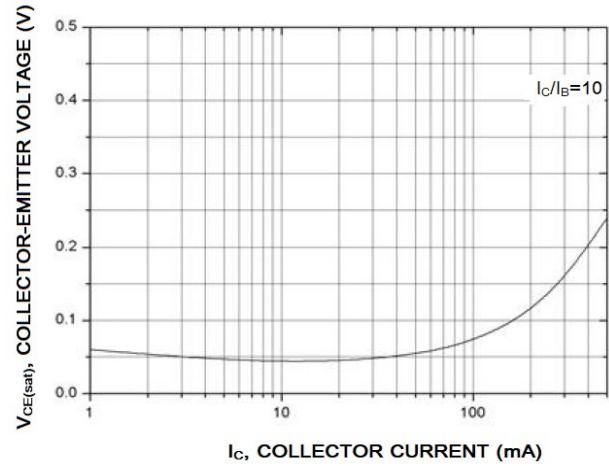




Figure 3. $h_{FE} - I_C$



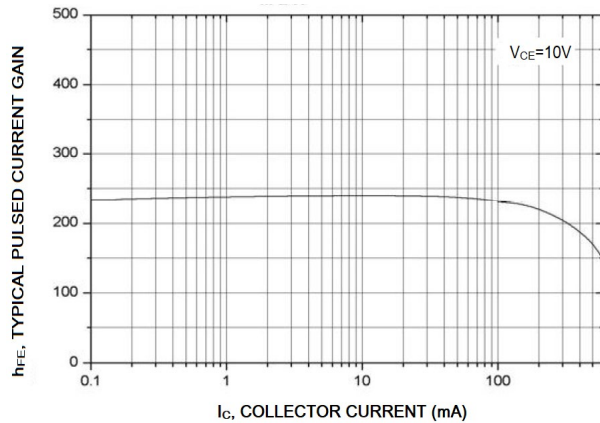

PACKAGE INFORMATION

Dimension in SOT-23 Package (Unit: mm)

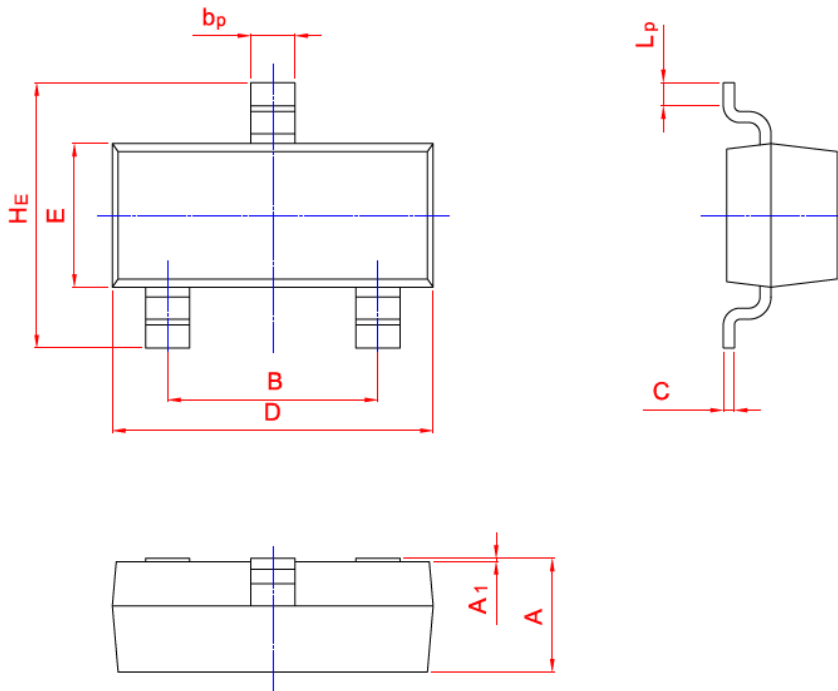

Symbol	Min.	Max.
A	0.900	1.400
B	1.780	2.050
b _p	0.350	0.510
C	0.080	0.190
D	2.700	3.100
E	1.200	1.650
H _E	2.100	3.000
A ₁	0.013	0.100
L _p	0.200	0.500



IMPORTANT NOTICE

AiT Semiconductor Inc. (AiT) reserves the right to make changes to any its product, specifications, to discontinue any integrated circuit product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied on is current.

AiT Semiconductor Inc.'s integrated circuit products are not designed, intended, authorized, or warranted to be suitable for use in life support applications, devices or systems or other critical applications. Use of AiT products in such applications is understood to be fully at the risk of the customer. As used herein may involve potential risks of death, personal injury, or server property, or environmental damage. In order to minimize risks associated with the customer's applications, the customer should provide adequate design and operating safeguards.

AiT Semiconductor Inc. assumes to no liability to customer product design or application support. AiT warrants the performance of its products of the specifications applicable at the time of sale.