

**DESCRIPTION**


The 2SC2714-Y is available in the SOT-23 package.

FEATURE

- Collector Current Capability $I_C=50\text{mA}$
- Collector Emitter Voltage $V_{CE0}=20\text{V}$

APPLICATION

AM/FM Amplifier, local oscillator of FM/VHF tuner high current gain bandwidth product $f_T=550\text{MHz}$ (Typ)

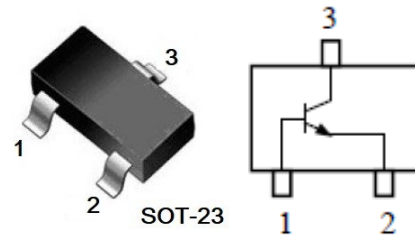PIN DESCRIPTION**ORDERING INFORMATION**

Package Type	Part Number
SOT-23	2SC2714-Y
SPQ	3,000pcs/Reel
AiT provides all RoHS Compliant Products	

PIN#	DESCRIPTION
1	Base
2	Emitter
3	Collector

ABSOLUTE MAXIMUM RATINGS

$T_A = 25^\circ\text{C}$, unless otherwise specified.

V_{CE0} , Collector-Emitter Voltage	20 V
V_{CBO} , Collector-Base Voltage	30 V
V_{EBO} , Emitter-Base Voltage	3 V
I_C , Collector Current	50 mA
P_{tot} , Total Device Dissipation ($T_A=25^\circ\text{C}$)	225 mW
$R_{(th)ja}$, Thermal Resistance Junction to Ambient	556 $^\circ\text{C/W}$
T_J , Junction Temperature(Max)	150 $^\circ\text{C}$
T_{stg} , Storage Temperature	-55 ~ +150 $^\circ\text{C}$

Stresses above may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated in the Electrical Characteristics are not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.


**ELECTRICAL CHARACTERISTICS** $T_A = 25^\circ\text{C}$ unless otherwise specified.

Parameter	Symbols	Conditions	Min.	Typ.	Max.	Unit
Breakdown Voltage	$V_{(BR)CEO}$	$I_C = 3\text{ mA},$ $I_B = 0$	20	-	-	V
	$V_{(BR)CBO}$	$I_C = 1\text{ mA},$ $I_E = 0$	30	-	-	V
	$V_{(BR)EBO}$	$I_E = 100\text{ }\mu\text{A},$ $I_C = 0$	3	-	-	V
Collector Cut-off Current	I_{CBO}	$V_{CB} = 15\text{ V},$ $I_E = 0$	-	-	0.05	μA
DC Current Gain	h_{FE}	$V_{CE} = 1\text{ V},$ $I_C = 50\text{ mA}$	20	-	-	-
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = 10\text{ mA},$ $I_B = 1\text{ mA},$	-	-	0.4	V
Base-Emitter Saturation Voltage	$V_{BE(sat)}$	$I_C = 10\text{ mA},$ $I_B = 1\text{ mA},$	-	-	1.0	V
Transition Frequency	f_T	$V_{CE} = 1\text{ V},$ $I_C = 3\text{ mA}$	600	-	-	MHz



PACKAGE INFORMATION

Dimension in SOT-23 (Unit: mm)

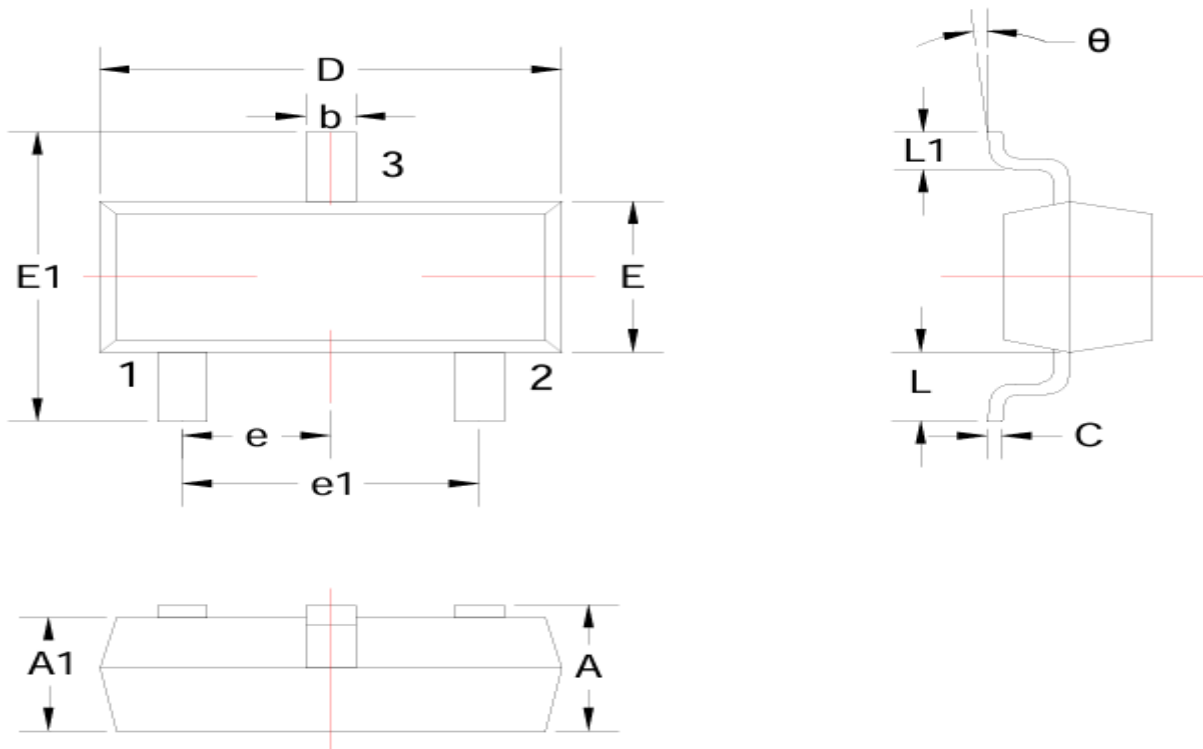

Symbol	Millimeter	
	Min.	Max.
A	0.900	1.150
A1	0.900	1.050
b	0.300	0.500
c	0.080	0.150
D	2.800	3.000
E	1.200	1.400
E1	2.250	2.550
e	0.950 TYP.	
e1	1.800	2.000
L	0.550 REF	
L1	0.300	0.500
θ	0°	8°

**IMPORTANT NOTICE**

AiT Semiconductor Inc. (AiT) reserves the right to make changes to any its product, specifications, to discontinue any integrated circuit product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied on is current.

AiT Semiconductor Inc. integrated circuit products are not designed, intended, authorized, or warranted to be suitable for use in life support applications, devices or systems or other critical applications. Use of AiT products in such applications is understood to be fully at the risk of the customer. As used herein may involve potential risks of death, personal injury, or server property, or environmental damage. In order to minimize risks associated with the customer's applications, the customer should provide adequate design and operating safeguards.

AiT Semiconductor Inc. assumes to no liability to customer product design or application support. AiT warrants the performance of its products of the specifications applicable at the time of sale.